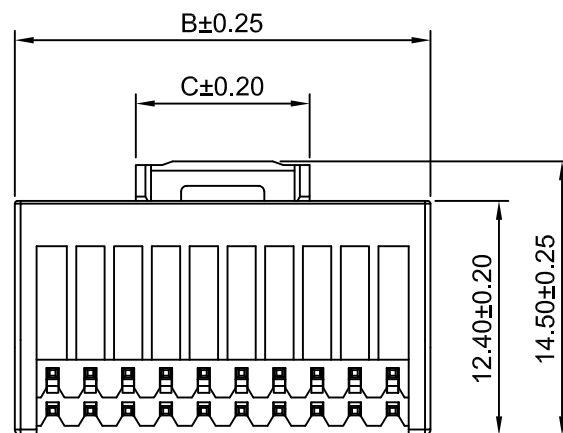
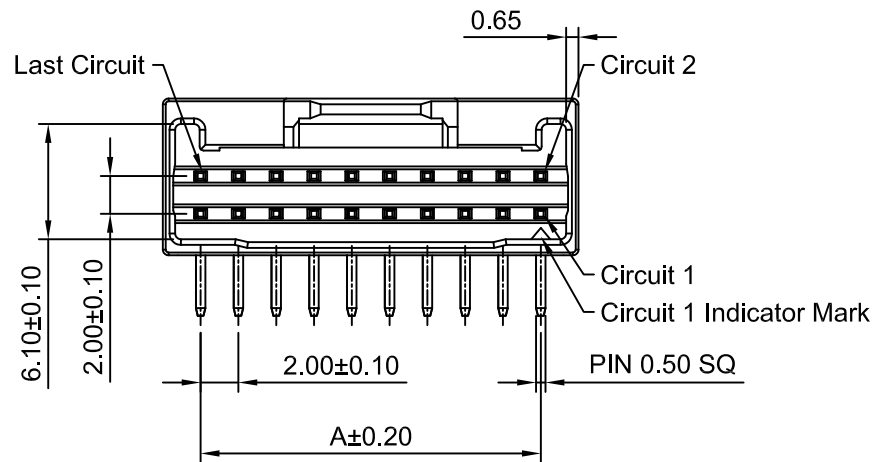


P.C.B LAYOUT
(REFERENCE PCB T=1.20~1.60mm)

Ordering Information:

A2006WRD-2xXP - ***

1 2

1.Part No.

3.Color:

(blank) - Natural

BK - Black

RD - Red

BL - Blue


YL - Yellow

OR - Orange

BR - Brown

PK - Pink

VI - Violet



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 9T+30%GF, UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x5P	8.00	12.00	7.30	2x13P	24.00	28.00	9.20
2x6P	10.00	14.00	9.20	2x14P	26.00	30.00	9.20
2x7P	12.00	16.00	9.20	2x15P	28.00	32.00	9.20
2x8P	14.00	18.00	9.20	2x16P	30.00	34.00	9.20
2x9P	16.00	20.00	9.20	2x17P	32.00	36.00	9.20
2x10P	18.00	22.00	9.20	2x18P	34.00	38.00	9.20
2x11P	20.00	24.00	9.20	2x19P	36.00	40.00	9.20
2x12P	22.00	26.00	9.20	2x20P	38.00	42.00	9.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

	Unit	Scale	Sheet	Title : 2.00mm Pitch		
	mm	2.5:1	1 of 1			
	Draw By:		Approved :		90° Dual Row Wafer	
3	Diankui Wan		Jack Yin			
9	General Tolerance			PROJECT		
3	x.x±0.25					
9	x.xx±0.20					
	x.xxx±0.15					
				DRAW NO : A2006WRD-2xXP		REV A3