

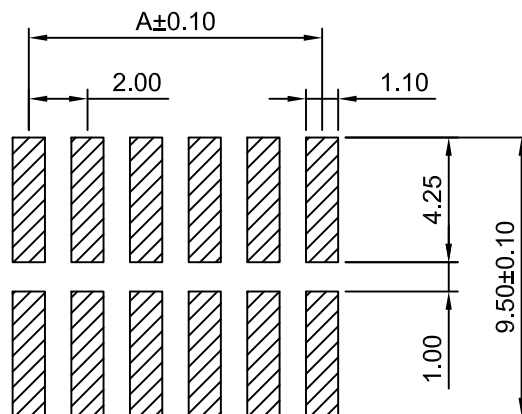


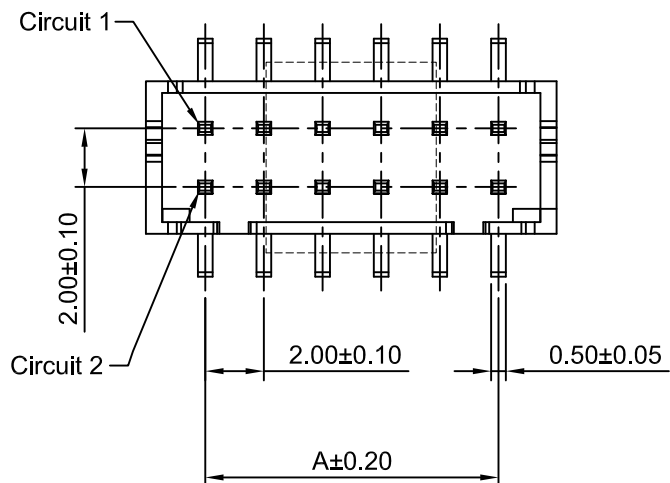

P.C.B LAYOUT
TOLERANCE:±0.05



2x2P

Ordering Information:
A2006WV-S-2xXP-LCP - **
1 2

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 800V AC/minute

Pin Material: Brass

Material: LCP,UL94V-0(Beige)



Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2006WV-S-2x2P-LCP	2.00	6.00
A2006WV-S-2x3P-LCP	4.00	8.00
A2006WV-S-2x4P-LCP	6.00	10.00
A2006WV-S-2x5P-LCP	8.00	12.00
A2006WV-S-2x6P-LCP	10.00	14.00
A2006WV-S-2x7P-LCP	12.00	16.00
A2006WV-S-2x8P-LCP	14.00	18.00
A2006WV-S-2x9P-LCP	16.00	20.00
A2006WV-S-2x10P-LCP	18.00	22.00

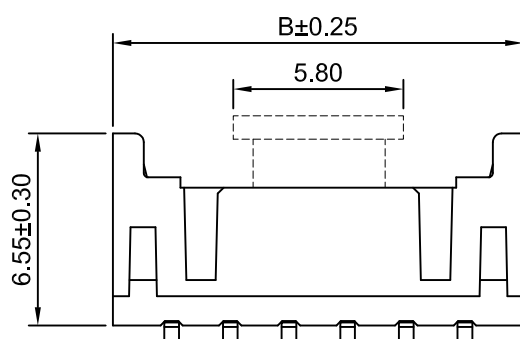

2x3P~2x10P

Cap
(For pick and
place systems)

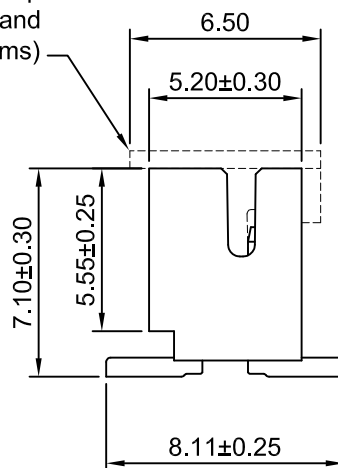

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1		
DRAWN	CHK'D	APPR	2.00mm PITCH VERTICAL DUAL ROW WAFER - SMD TYPE	
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,xx±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°			A2006WV-S-2xXP-LCP	A0

A0	NEW RELEASE	2005.06.15
REV	DESCRIPTION	DATE