

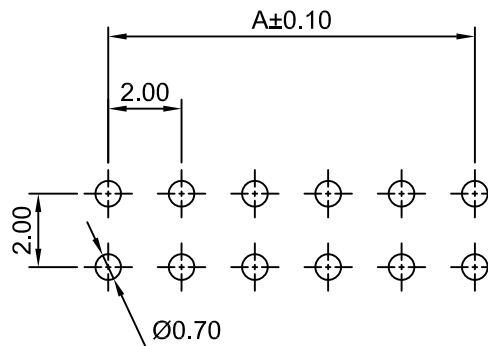
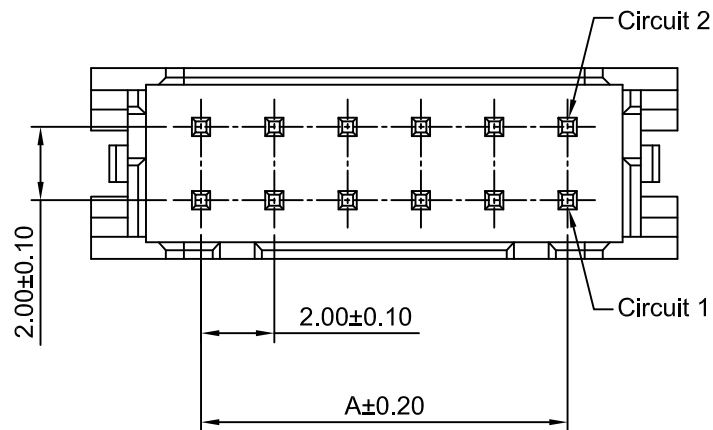


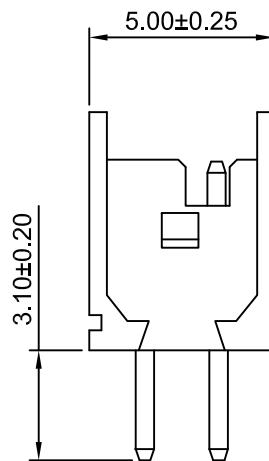

P.C.B LAYOUT
TOLERANCE:±0.05

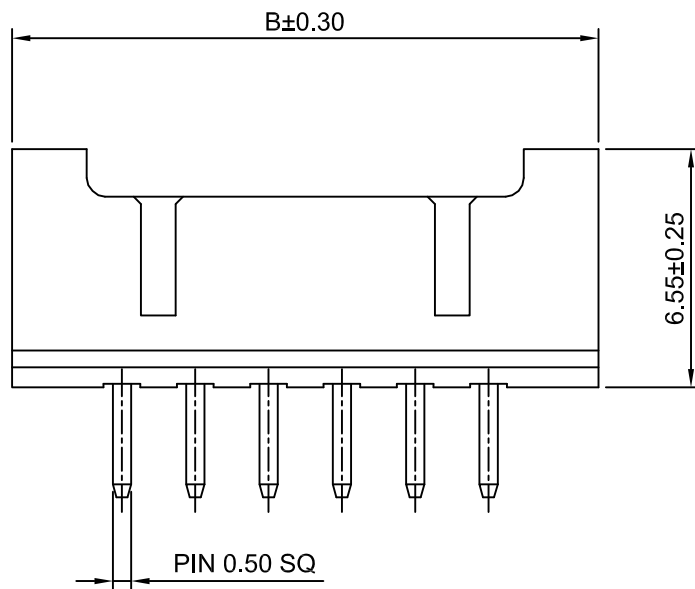

Ordering Information:

A2006WVA-2xXP - ***
1 2

1.Part NO.

2.Material & Color:

(Blank): Nylon 66,UL94V-0(Ivory)

6T: Nylon 6T,UL94V-0(Ivory)

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.00	8.00	2x14P	26.00	32.00
2x3P	4.00	10.00	2x15P	28.00	34.00
2x4P	6.00	12.00	2x16P	30.00	36.00
2x5P	8.00	14.00	2x17P	32.00	38.00
2x6P	10.00	16.00	2x18P	34.00	40.00
2x7P	12.00	18.00	2x19P	36.00	42.00
2x8P	14.00	20.00	2x20P	38.00	44.00
2x9P	16.00	22.00	2x21P	40.00	46.00
2x10P	18.00	24.00	2x22P	42.00	48.00
2x11P	20.00	26.00	2x23P	44.00	50.00
2x12P	22.00	28.00	2x24P	46.00	52.00
2x13P	24.00	30.00	2x25P	48.00	54.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit			Scale		Sheet		TITLE	
mm			5:1		1 of 1			
DRAWN			CHK'D		APPR			
Chengbiao Ye			Diankui Wan		Jack Yin		2.00mm Pitch Vertical Dual Row Wafer	
General Tolerances			THIRD ANGLE PROJECTION					
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°								
DRAWING NO.							REV A3	
A2006WVA-2xXP								

A3	CHANGE THE DRAWING	2023.02.09
A2	CHANGE THE DRAWING	2022.12.21
A1	CHANGE THE DRAWING	2020.11.03
A0	NEW RELEASE	2010.04.03
REV	DESCRIPTION	DATE