




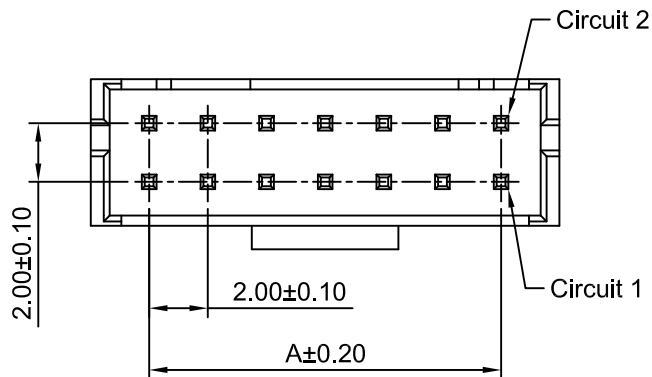


2x7P~2x20P

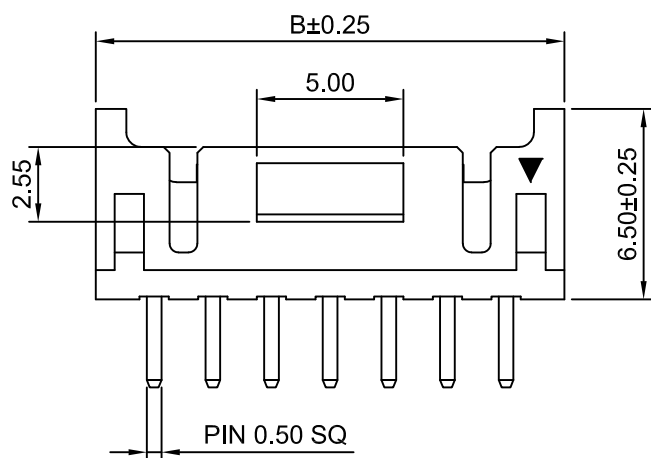

Ordering Information:
A2006WVB-2xXP - *** - *** - ***
1 2 3 4

- 1.Part No.
- 2.Material:
(Blank) : Nylon 66,UL94V-0
GWT : Nylon 66,UL94V-0,
IEC 60335-1,5th Edition
Glow Wire Capable.
LCP:LCP,UL94V-0
- 3.Color:
(Blank): White
BK: Black
- 4.Finish:
(Blank) : Tin over Nickel
G : Gold over Nickel

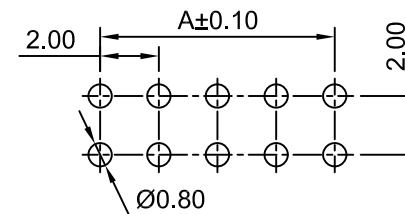


P.C.B LAYOUT
TOLERANCE:±0.05

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.00	6.00	2x14P	26.00	30.00
2x3P	4.00	8.00	2x15P	28.00	32.00
2x4P	6.00	10.00	2x16P	30.00	34.00
2x5P	8.00	12.00	2x17P	32.00	36.00
2x6P	10.00	14.00	2x18P	34.00	38.00
2x7P	12.00	16.00	2x19P	36.00	40.00
2x8P	14.00	18.00	2x20P	38.00	42.00
2x9P	16.00	20.00	2x21P	40.00	44.00
2x10P	18.00	22.00	2x22P	42.00	46.00
2x11P	20.00	24.00	2x23P	44.00	48.00
2x12P	22.00	26.00	2x24P	46.00	50.00
2x13P	24.00	28.00	2x25P	48.00	52.00

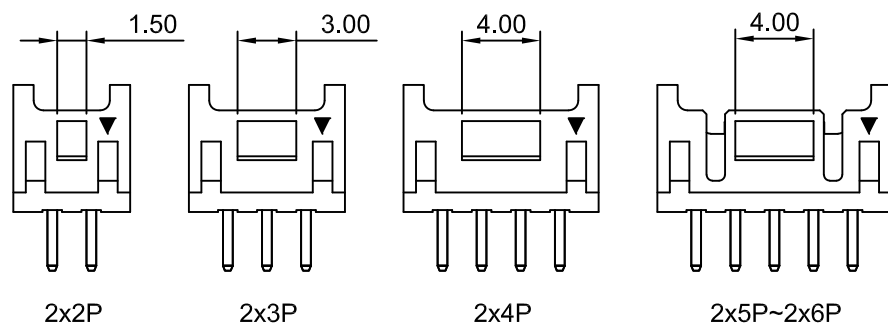

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRAWN	CHK'D	APPR	2.00mm PITCH VERTICAL DUAL ROW WAFER	
Xu Lei	Dlankul Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A2006WVB-2xXP	A4

A4	ADD THE SIZE	2020.11.18
A3	ADD THE SIZE OF LOCK	2020.07.02
A2	CHANGE THE COLOR	2019.08.22
A1	CHANGE THE DRAWING	2017.08.11
A0	NEW RELEASE	2012.05.10
REV	DESCRIPTION	DATE