
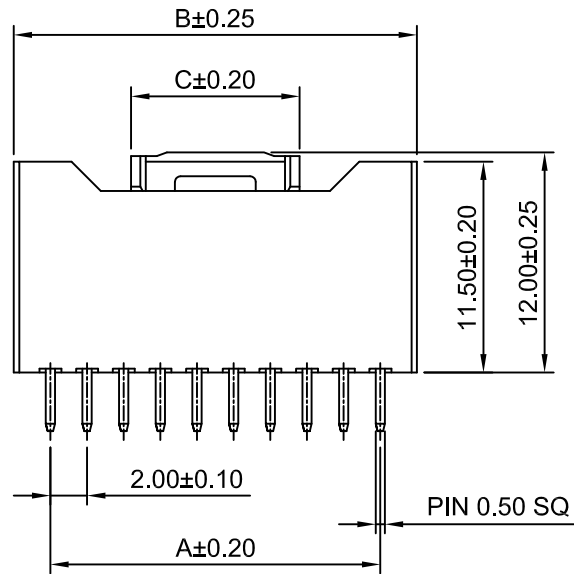
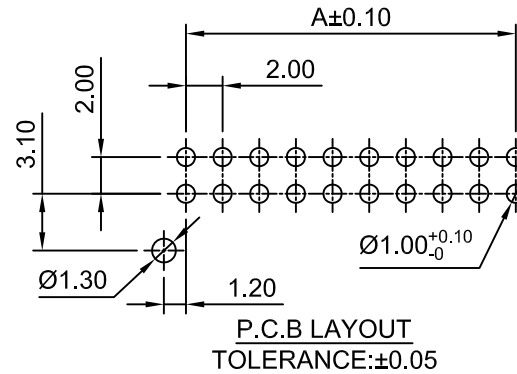
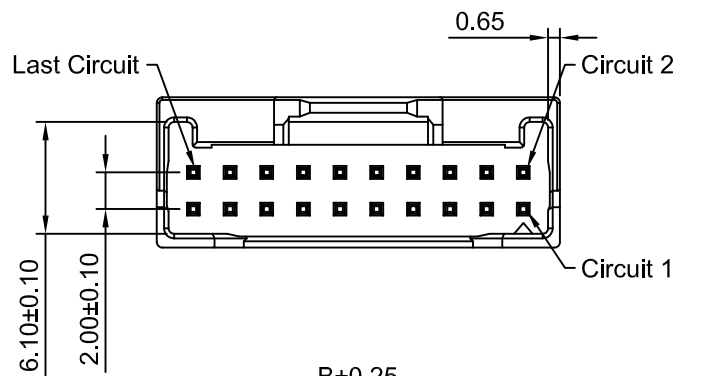


Ordering Information:
A2006WVD-2xXP - ***
1 2

1.Part No.
2.Color:
(blank) - Natural
BK - Black
RD - Red
BL - Blue
YL - Yellow
GN - Green
OR - Orange
BR - Brown
PK - Pink



SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 9T+30%GF,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x5P	8.00	12.00	7.30	2x13P	24.00	28.00	9.20
2x6P	10.00	14.00	9.20	2x14P	26.00	30.00	9.20
2x7P	12.00	16.00	9.20	2x15P	28.00	32.00	9.20
2x8P	14.00	18.00	9.20	2x16P	30.00	34.00	9.20
2x9P	16.00	20.00	9.20	2x17P	32.00	36.00	9.20
2x10P	18.00	22.00	9.20	2x18P	34.00	38.00	9.20
2x11P	20.00	24.00	9.20	2x19P	36.00	40.00	9.20
2x12P	22.00	26.00	9.20	2x20P	38.00	42.00	9.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit			Scale			Sheet			TITLE		
mm			2.5:1			1 of 1			2.00mm Pitch 180° Dual Row Wafer		
DRWN			CHK'D			APPR					
Chengbiao Ye			Diankui Wan			Jack Yin					
General Tolerances						THIRD ANGLE PROJECTION					
x.xx±0.25											
x.xxx±0.20											
x.xxxx±0.15											
ANGLES ±1°						DRAWING NO.					
						A2006WVD-2xXP					
						REV					
						AC					