
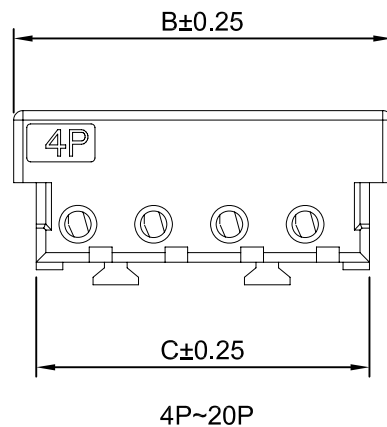

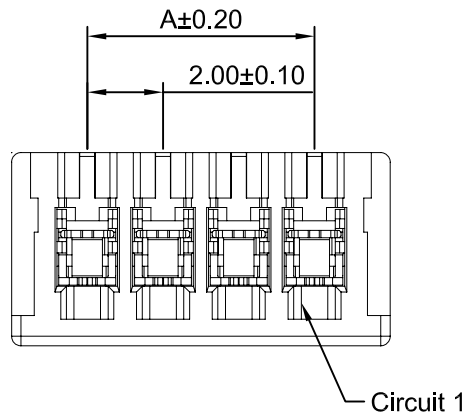


3P



2P

SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Housing Material: PBT(GF),UL94V-0

Terminal Material: Phosphor Bronze/Tin over Nickel

Applicable Wire Size: AWG#26~28 (UL1571, UL1061)

Insulation DIA Range: 0.83~1.05

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	6.00	4.80	12P	22.00	26.00	24.80
3P	4.00	8.00	6.80	13P	24.00	28.00	26.80
4P	6.00	10.00	8.80	14P	26.00	30.00	28.80
5P	8.00	12.00	10.80	15P	28.00	32.00	30.80
6P	10.00	14.00	12.80	16P	30.00	34.00	32.80
7P	12.00	16.00	14.80	17P	32.00	36.00	34.80
8P	14.00	18.00	16.80	18P	34.00	38.00	36.80
9P	16.00	20.00	18.80	19P	36.00	40.00	38.80
10P	18.00	22.00	20.80	20P	38.00	42.00	40.80
11P	20.00	24.00	22.80				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yin

Title :		2.00mm PITCH
		IDC CONNECTOR
Draw NO :	A2007HD-XP	REV A0

General Tolerance		
		ANGLE±
A0	NEW RELEEASE	2016.12.10
REV	DESCRIPTION	DATE