

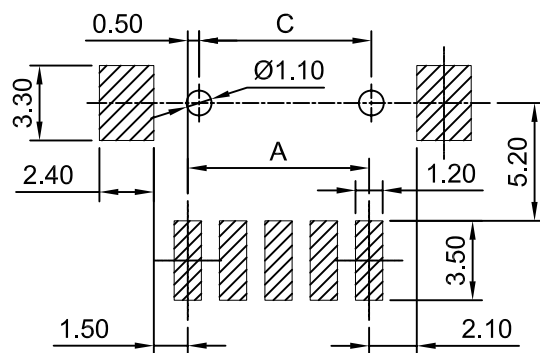
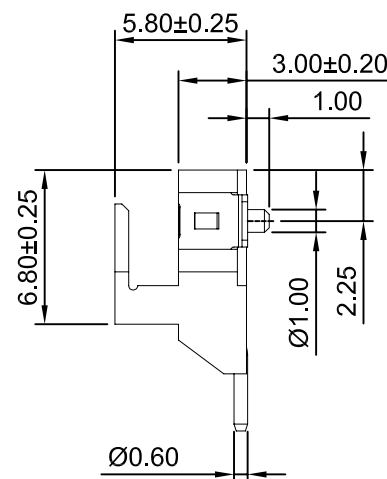
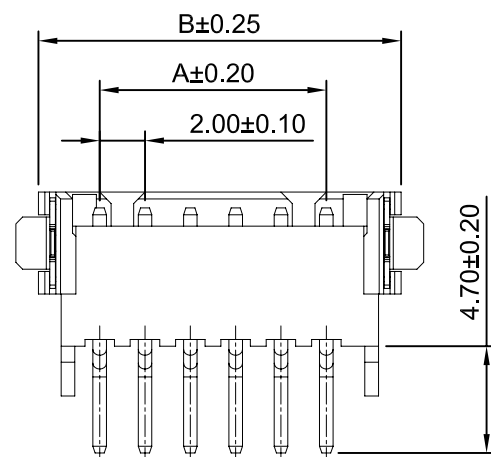



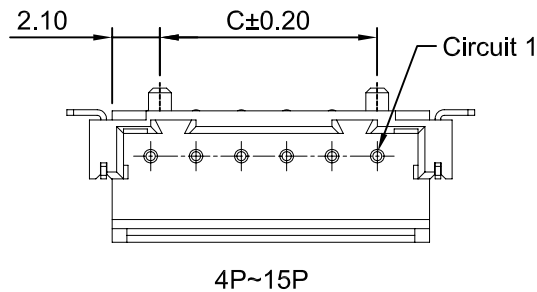

P.C.B LAYOUT
4P~15P

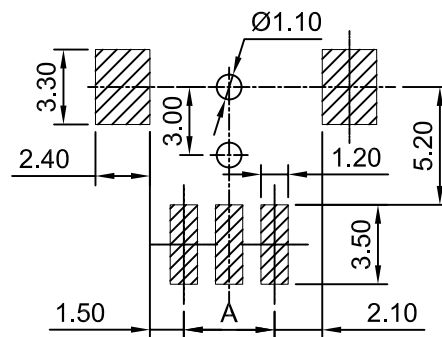

P.C.B LAYOUT
2P~3P

Ordering Information:

A2007WR-S-F-XP - **
1 2

1.Part No.

2.Color:

(Blank):Beige

BK:Black

SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 6T,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	8.00	----	9P	16.00	22.00	15.60
3P	4.00	10.00	----	10P	18.00	24.00	17.60
4P	6.00	12.00	5.60	11P	20.00	26.00	19.60
5P	8.00	14.00	7.60	12P	22.00	28.00	21.60
6P	10.00	16.00	9.60	13P	24.00	30.00	23.60
7P	12.00	18.00	11.60	14P	26.00	32.00	25.60
8P	14.00	20.00	13.60	15P	28.00	34.00	27.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
Scale: 3:1
Sheet: 1 of 1

Title :

2.00mm PITCH

Draw BY:

Tony Su

Approved :

Jack Yin

90° WAFER - SMT TYPE

General Tolerance

x.xx±0.25

x.xx±0.20

x.xxx±0.15

ANGLE±



DRAW NO : A2007WR-S-F-XP

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2017.05.08