
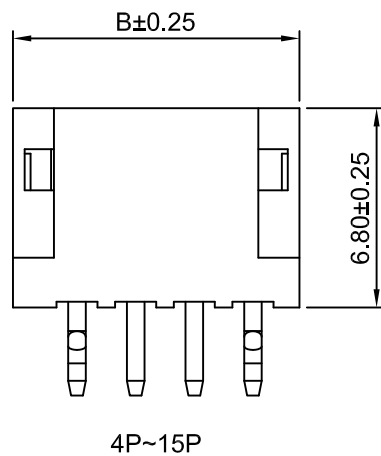
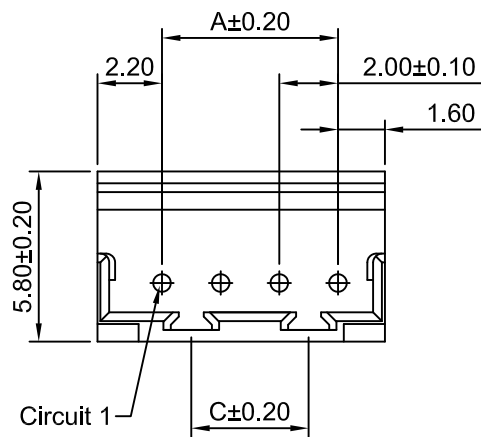

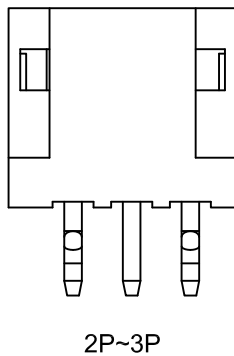



P.C.B LAYOUT
TOLERANCE:±0.05



TYPE 2

Ordering Information:
A2007WVD-XP - *** - ** - **

- 1.Part NO.
2.Style:
(blank): Type 1
2: Type 2
3.Material:
(blank): Nylon 66,UL94V-0 (White)
GWT: Nylon 66,UL94V-0 (Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.
4.Color:
(blank): White
BK: Black BL: Blue
YL: Yellow



SPECIFICATIONS:

Current Rating: 4A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2007WVD-2P	2.00	5.80	---
A2007WVD-3P	4.00	7.80	---
A2007WVD-4P	6.00	9.80	4.00
A2007WVD-5P	8.00	11.80	6.00
A2007WVD-6P	10.00	13.80	8.00
A2007WVD-7P	12.00	15.80	10.00
A2007WVD-8P	14.00	17.80	12.00
A2007WVD-9P	16.00	19.80	14.00
A2007WVD-10P	18.00	21.80	16.00
A2007WVD-11P	20.00	23.80	18.00
A2007WVD-12P	22.00	25.80	20.00
A2007WVD-13P	24.00	27.80	22.00
A2007WVD-14P	26.00	29.80	24.00
A2007WVD-15P	28.00	31.80	26.00

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 2.00mm PITCH 180° WAFER	
mm		4:1		1 of 1			
DRWN		CHK'D		APPR			
Chengbiao Ye		Diankui Wan		Jack Yin		DRAWING NO. A2007WVD-XP	
General Tolerances		THIRD ANGLE PROJECTION		REV A2			
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°							

A2	CHANGE THE DRAWING	2023.03.06
A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2013.05.24
REV	DESCRIPTION	DATE