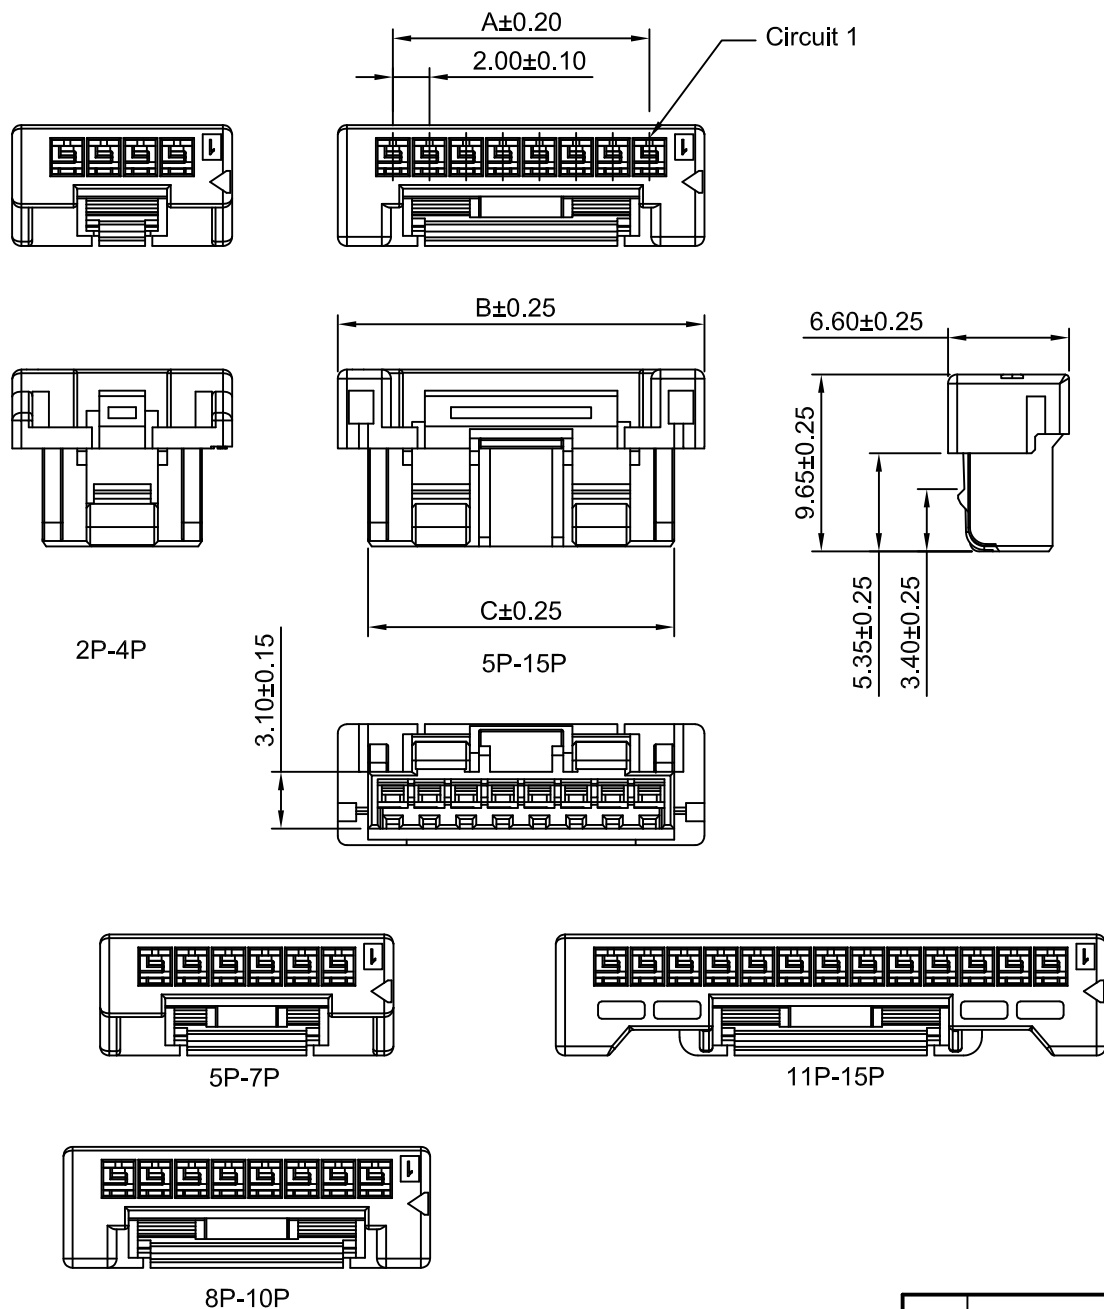


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66 UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2008HE-2P	2.00	8.00	4.70
A2008HE-3P	4.00	10.00	6.70
A2008HE-4P	6.00	12.00	8.70
A2008HE-5P	8.00	14.00	10.70
A2008HE-6P	10.00	16.00	12.70
A2008HE-7P	12.00	18.00	14.70
A2008HE-8P	14.00	20.00	16.70
A2008HE-9P	16.00	22.00	18.70
A2008HE-10P	18.00	24.00	20.70
A2008HE-11P	20.00	26.00	22.70
A2008HE-12P	22.00	28.00	24.70
A2008HE-13P	24.00	30.00	26.70
A2008HE-14P	26.00	32.00	28.70
A2008HE-15P	28.00	34.00	30.70

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	2.5:1	1 of 1	2.00mm PITCH HOUSING		
DRWN	CHK'D	APPR			
Xu Lei	DianKui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO. A2008HE-XP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
			REV A0		

A0	NEW RELEASE	2021.12.15
REV	DESCRIPTION	DATE