

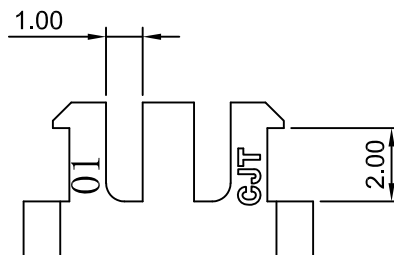
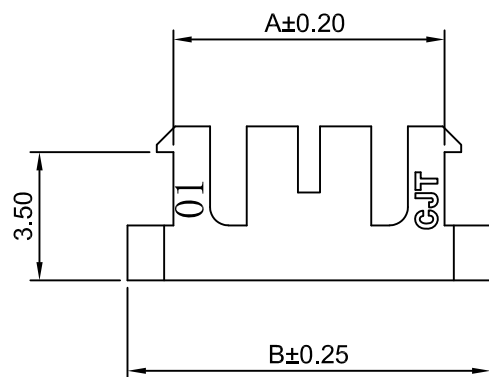



2P



3P



4P~16P

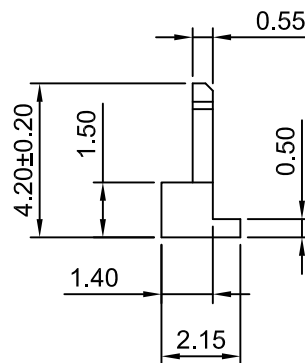

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66, UL94V-0(Brick red)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.40	5.90	10P	19.40	21.90
3P	5.40	7.90	11P	21.40	23.90
4P	7.40	9.90	12P	23.40	25.90
5P	9.40	11.90	13P	25.40	27.90
6P	11.40	13.90	14P	27.40	29.90
7P	13.40	15.90	15P	29.40	31.90
8P	15.40	17.90	16P	31.40	33.90
9P	17.40	19.90			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE
mm		5:1		1 of 1		
DRWN		CHK'D		APPR		
Wenmin Luo		Diankui Wan		Jack Yin		2.00mm PITCH Seal
General Tolerances			THIRD ANGLE PROJECTION			
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°						
DRAWING NO.						A2008S-XP
REV A0						

A0	NEW RELEASE	2020.12.02
REV	DESCRIPTION	DATE