
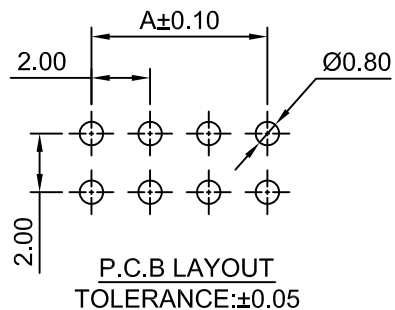
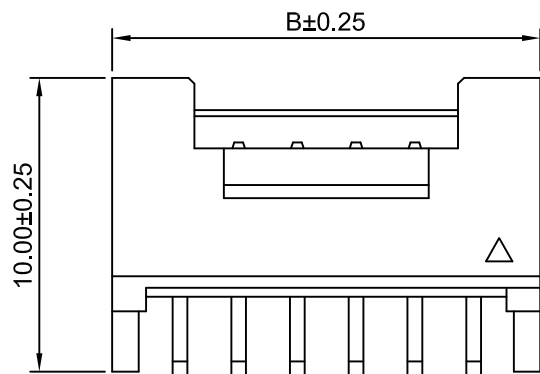


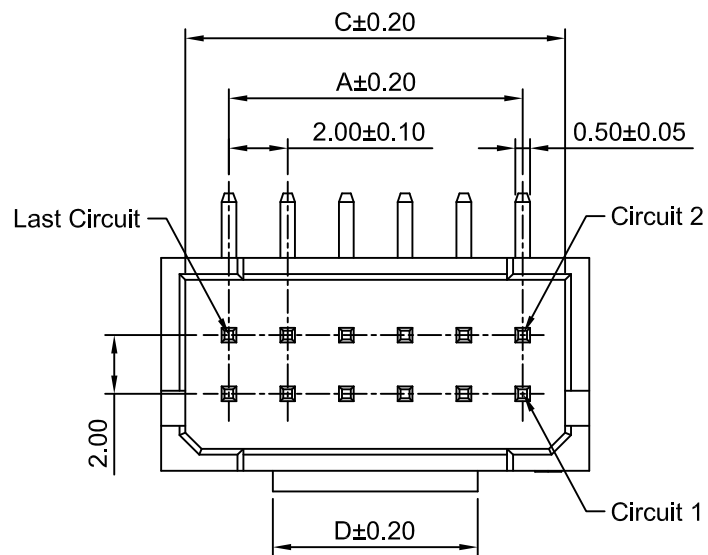

Ordering Information:

A2008WR-2xXP-P-LCP - ** - D22 - ***
1 2 3

1.Part No.

2.Finish:

(Blank): Tin over Nickel

G:Gold over Nickel (Au:1u")

G3: Gold over Nickel(Au:3u")

G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

3.Packing:

(Blank): Bag

RE: Tape & Reel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions




Circuits	Dimensions(mm)			
	A	B	C	D
A2008WR-2x2P-P-LCP	2.00	6.60	4.95	3.00
A2008WR-2x3P-P-LCP	4.00	8.60	6.95	3.00
A2008WR-2x4P-P-LCP	6.00	10.60	8.95	3.00
A2008WR-2x5P-P-LCP	8.00	12.60	10.95	5.00
A2008WR-2x6P-P-LCP	10.00	14.60	12.95	7.00
A2008WR-2x7P-P-LCP	12.00	16.60	14.95	9.00
A2008WR-2x8P-P-LCP	14.00	18.60	16.95	11.00
A2008WR-2x9P-P-LCP	16.00	20.60	18.95	13.00
A2008WR-2x10P-P-LCP	18.00	22.60	20.95	15.00
A2008WR-2x11P-P-LCP	20.00	24.60	22.95	17.00
A2008WR-2x12P-P-LCP	22.00	26.60	24.95	19.00
A2008WR-2x13P-P-LCP	24.00	28.60	26.95	21.00
A2008WR-2x14P-P-LCP	26.00	30.60	28.95	23.00
A2008WR-2x15P-P-LCP	28.00	32.60	30.95	25.00
A2008WR-2x16P-P-LCP	30.00	34.60	32.95	27.00

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH RIGHT-ANGLE DUAL ROW WAFER	
Chengbiao Ye	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO. A2008WR-2xXP-P-LCP-D22
A1	CHANGE THE DRAWING	2023.05.31		
A0	NEW RELEASE	2020.10.12		REV A1
REV	DESCRIPTION	DATE		

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

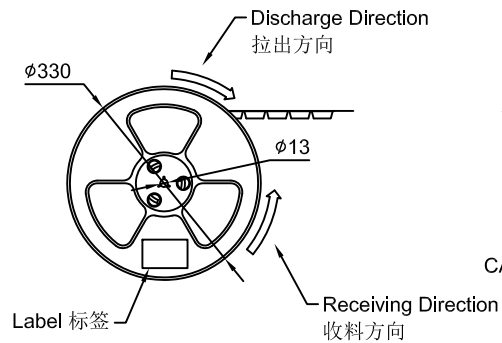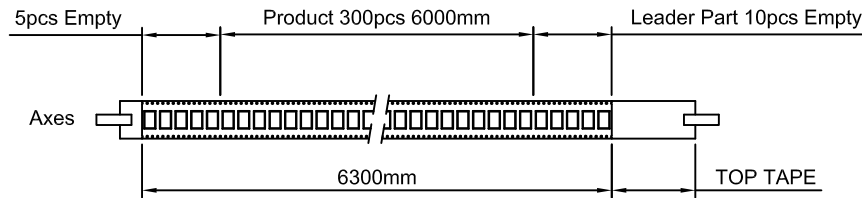


COVER TAPE PEEL STRENGTH:20~120g
PEEL SPEED:300mm/minute

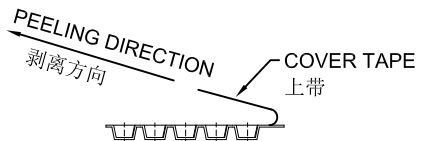


CARRIER TAPE
下带

TAKING OUT DIRECTION
拉出方向





TAKING OUT DIRECTION

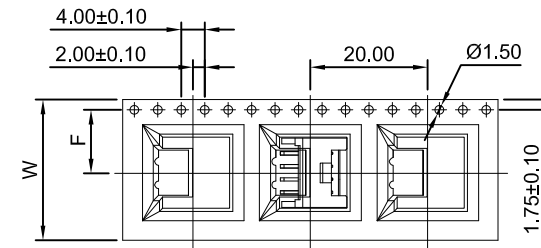

WIDTH=16~24mm

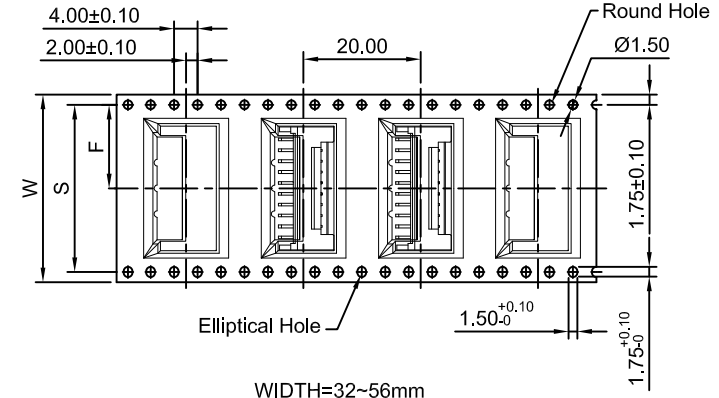

WIDTH=32~56mm

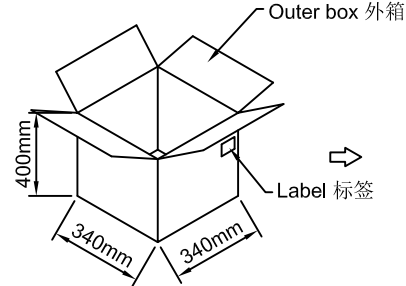

Circuits	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
2x2P	16.00	/	7.50	20.50	16.50	300	19	5700
2x3P~2x5P	24.00	/	11.50	28.50	24.50	300	13	3900
2x6P~2x8P	32.00	28.40	14.20	36.50	32.50	300	10	3000
2x9P~2x14P	44.00	40.40	20.20	48.50	44.50	300	7	2100
2x15P~2x16P	56.00	52.40	26.20	60.50	56.50	300	6	1800

NOTES:

- 1.Carrier Camber Is Within 1mm In 100mm;带长100mm内容许弯曲度1mm
- 2.10 Sprocket Hole Pitch Cumulative Tolerance±0.20mm;圆孔十个孔距离累计允许公差为±0.20mm

A0	NEW RELEASE	2024.11.16
REV	DESCRIPTION	DATE

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.00mm PITCH RIGHT-ANGLE WAFER PACKING
mm	1:1.25	1 of 1	
DRAWN	CHK'D	APPR	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances			THIRD ANGLE PROJECTION
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°			
DRAWING NO.			REV
A2008WR-2xXP-P-LCP-D22			A0