

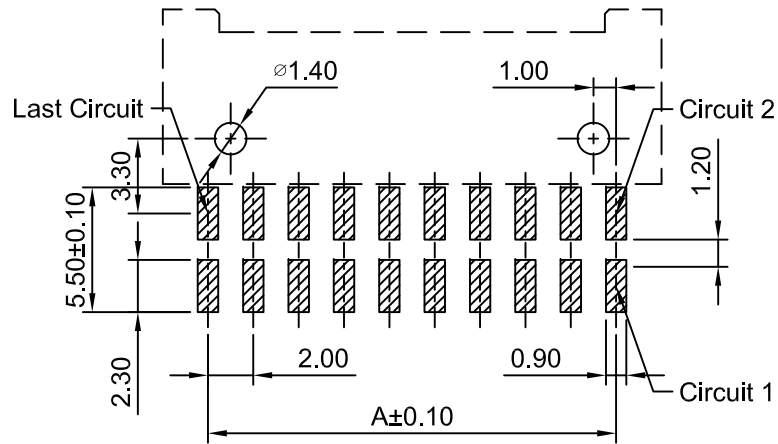
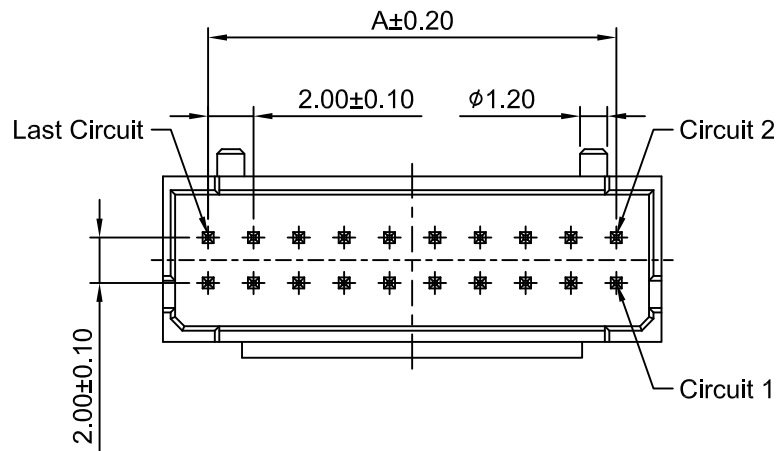



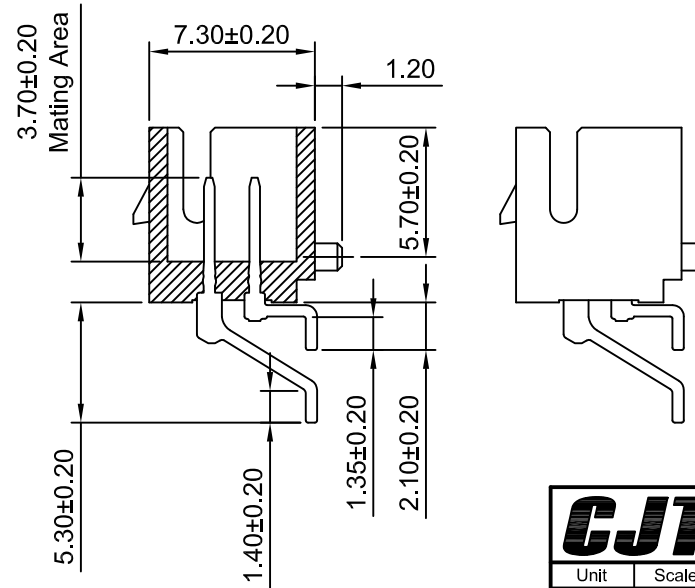

P.C.B LAYOUT
TOLERANCE:±0.05

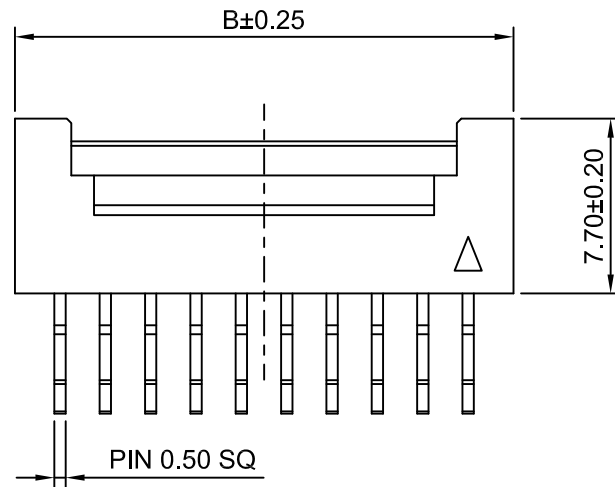

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
PIN Material: Brass/Tin over Nickel
Material: Nylon 9T UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2008WR-S-F-2x2P	2.00	6.00
A2008WR-S-F-2x3P	4.00	8.00
A2008WR-S-F-2x4P	6.00	10.00
A2008WR-S-F-2x5P	8.00	12.00
A2008WR-S-F-2x6P	10.00	14.00
A2008WR-S-F-2x7P	12.00	16.00
A2008WR-S-F-2x8P	14.00	18.00
A2008WR-S-F-2x9P	16.00	20.00
A2008WR-S-F-2x10P	18.00	22.00
A2008WR-S-F-2x11P	20.00	24.00
A2008WR-S-F-2x12P	22.00	26.00
A2008WR-S-F-2x13P	24.00	28.00
A2008WR-S-F-2x14P	26.00	30.00
A2008WR-S-F-2x15P	28.00	32.00
A2008WR-S-F-2x16P	30.00	34.00
A2008WR-S-F-2x17P	32.00	36.00
A2008WR-S-F-2x18P	34.00	38.00
A2008WR-S-F-2x19P	36.00	40.00
A2008WR-S-F-2x20P	38.00	42.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unjt	Scale	Sheet
mm	3:1	1 of 1
DRWN	CHK'D	APPR
Dengchun Yi	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x,x±0.25		
x,xx±0.20		
x,xxx±0.15		
ANGLES ±1°		

REV	DESCRIPTION	DATE
A3	CHANGE THE SIZE	2020.06.12
A2	CHANGE THE DRAWING	2020.05.21
A1	CHANGE THE INFORMATION	2020.02.27
A0	NEW RELEASE	2019.12.27

TITLE	
2.00mm PITCH 90° DUAL ROW WAFER - SMD TYPE	
DRAWING NO	REV
A2008WR-S-F-2xXP	A3