
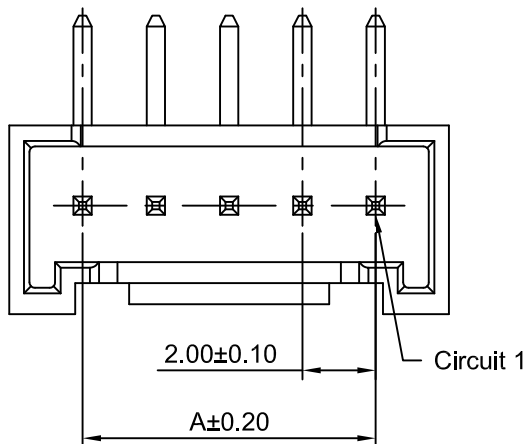


P.C.B LAYOUT


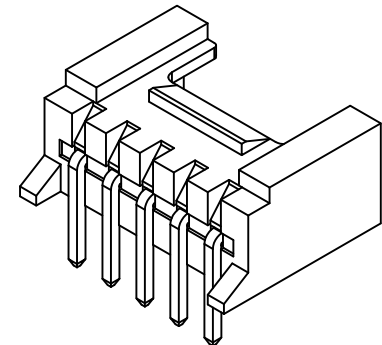


SPECIFICATIONS:

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact Resistance: $30\text{m}\Omega$ Max
 Insulation Resistance: $1000\text{M}\Omega$ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Gold over Nickel(Au:3u")
 Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	10P	18.00	22.00
3P	4.00	8.00	11P	20.00	24.00
4P	6.00	10.00	12P	22.00	26.00
5P	8.00	12.00	13P	24.00	28.00
6P	10.00	14.00	14P	26.00	30.00
7P	12.00	16.00	15P	28.00	32.00
8P	14.00	18.00	16P	30.00	34.00
9P	16.00	20.00			

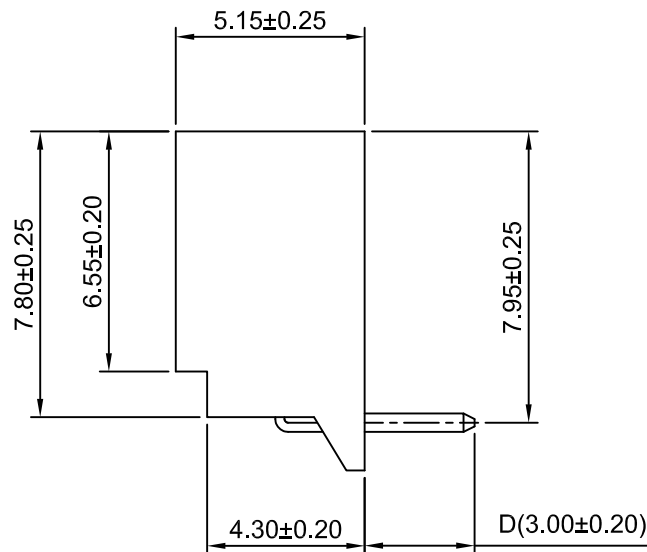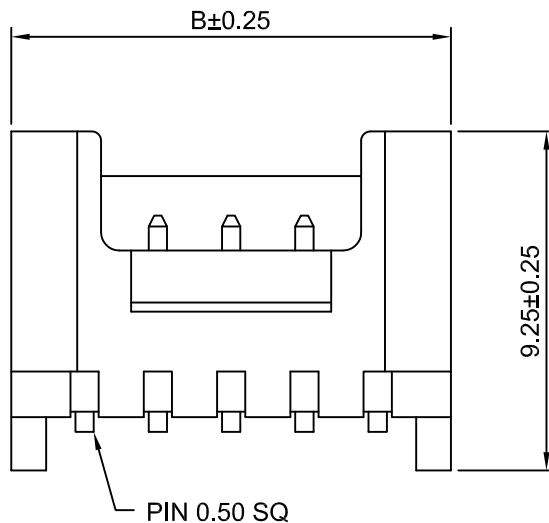

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
Draw By:	Approved :	
Dlankul Wan	Jack Yln	

Title :
2.00mm Pitch
90° Wafer

A0	NEW RELEASE	2019.01.15
REV	DESCRIPTION	DATE

General Tolerance	
x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

DRAW NO : A2008WR-XP-G3-D300
 REV A0