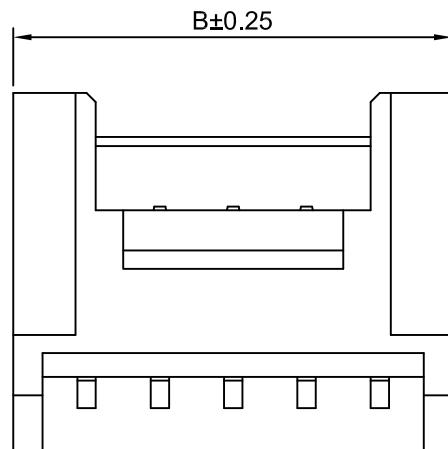
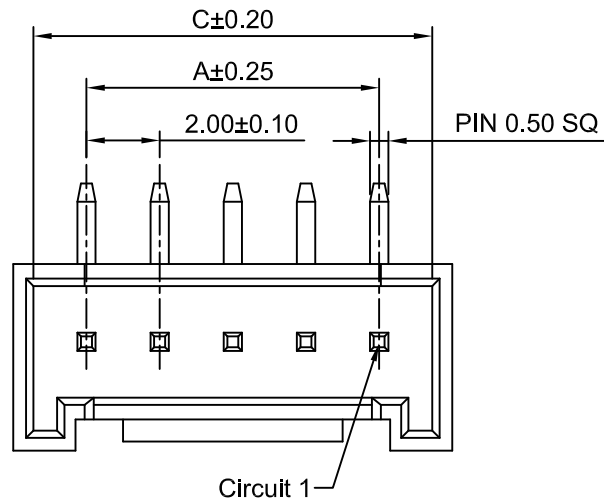


P.C.B LAYOUT
TOLERANCE: ± 0.05

Ordering Information:

A2008WR-XP-P-LCP - ** - D22 - ***
1 2 3

1.Part No.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel (Au:1u")

G3: Gold over Nickel (Au:3u")



G15: Gold over Nickel (Au:15u", Mating Area)

G30: Gold over Nickel (Au:30u", Mating Area)

3.Packing:

(Blank): Bag

RE: Tape & Reel

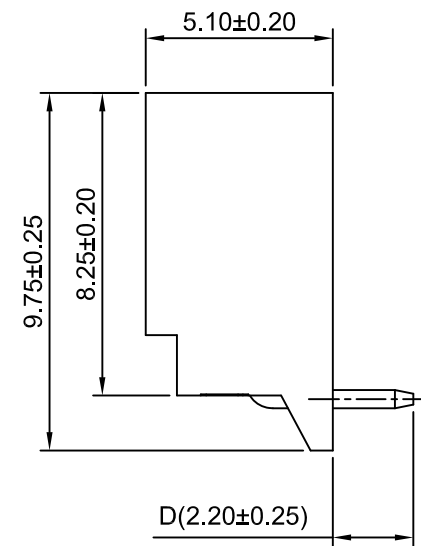

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Material: LCP, UL94V-0(Beige)




Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
A2008WR-2P-P-LCP	2.00	6.00	4.90
A2008WR-3P-P-LCP	4.00	8.00	6.90
A2008WR-4P-P-LCP	6.00	10.00	8.90
A2008WR-5P-P-LCP	8.00	12.00	10.90
A2008WR-6P-P-LCP	10.00	14.00	12.90
A2008WR-7P-P-LCP	12.00	16.00	14.90
A2008WR-8P-P-LCP	14.00	18.00	16.90
A2008WR-9P-P-LCP	16.00	20.00	18.90
A2008WR-10P-P-LCP	18.00	22.00	20.90
A2008WR-11P-P-LCP	20.00	24.00	22.90
A2008WR-12P-P-LCP	22.00	26.00	24.90
A2008WR-13P-P-LCP	24.00	28.00	26.90
A2008WR-14P-P-LCP	26.00	30.00	28.90
A2008WR-15P-P-LCP	28.00	32.00	30.90
A2008WR-16P-P-LCP	30.00	34.00	32.90






CJTconn

CHANGJIANG CONNECTORS CO.,LTD.


Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH RIGHT-ANGLE WAFER	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2008WR-XP-P-LCP-D22	
A1	JL-GC-ECN00411	2024.11.16		
A0	NEW RELEASE	2020.10.12	REV A1	
REV	DESCRIPTION	DATE		

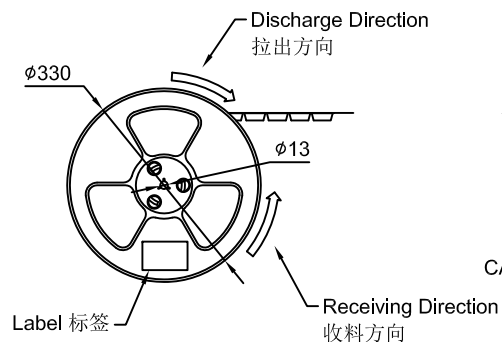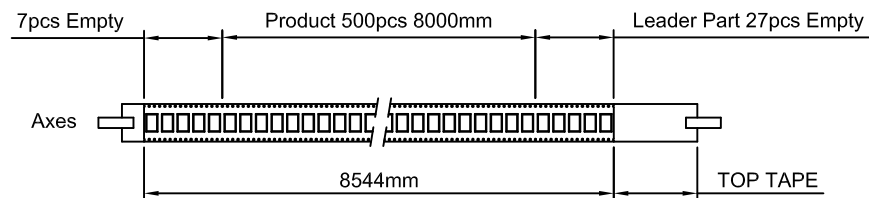

Single hole:None Hole Side
单孔: 贴无链孔侧
Double hole:Elliptical Hole Side
双孔: 贴椭圆孔侧

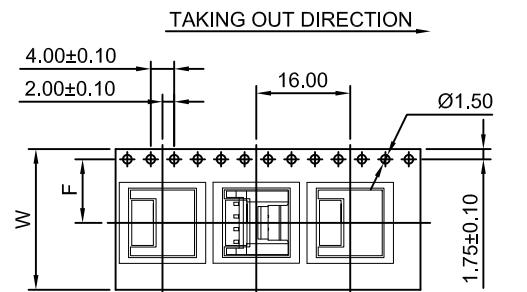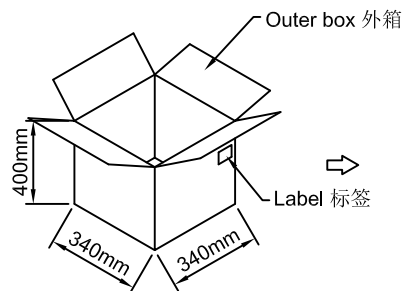

WIDTH=16~24mm

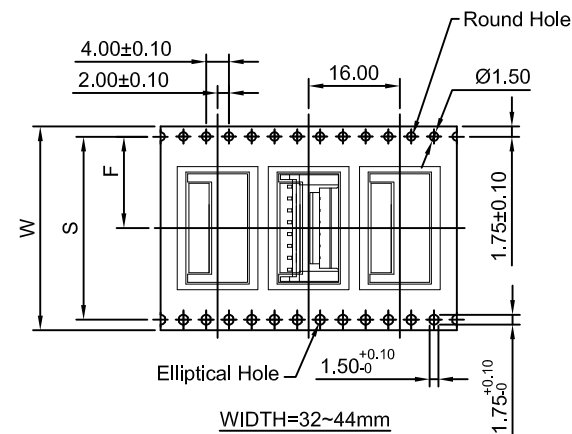

Circuits	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
2P~3P	16.00	/	7.50	20.50	16.50	500	19	9500
4P~6P	24.00	/	11.50	28.50	24.50	500	13	6500
07P~09P	32.00	28.40	14.20	36.50	32.50	500	10	5000
10P~14P	44.00	40.40	20.20	48.50	44.50	500	7	3500

NOTES:

- 1.Carrier Camber Is Within 1mm In 100mm;带长100mm内容许弯曲度1mm
- 2.10 Sprocket Hole Pitch Cumulative Tolerance±0.20mm;圆孔十个孔距离累计允许公差为±0.20mm

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	1:1.25	1 of 1	2.00mm PITCH RIGHT-ANGLE WAFER PACKING		
DRAWN	CHK'D	APPR			
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2008WR-XP-P-LCP-D22		A0
A0	NEW RELEASE	2024.11.16			
REV	DESCRIPTION	DATE			