
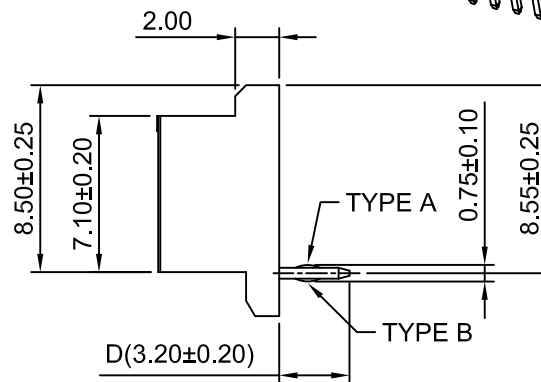


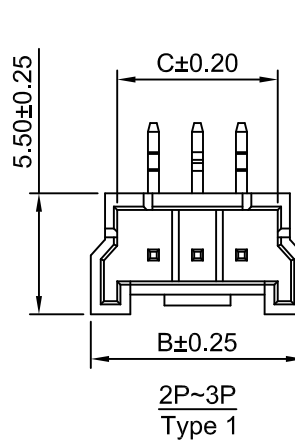
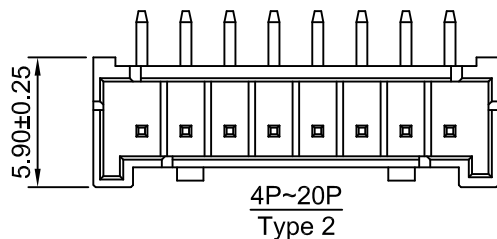

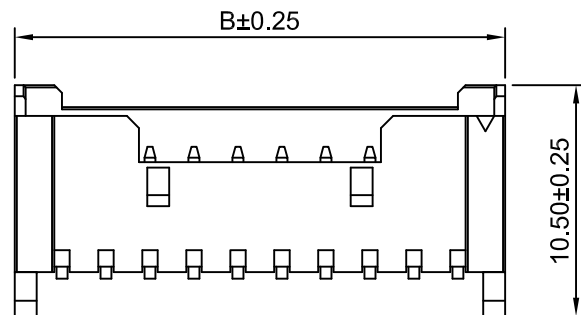


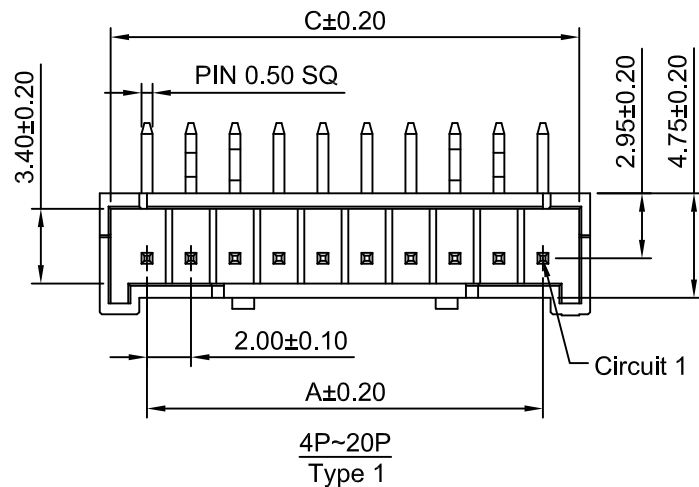

With K To Choose the type(A Or B)

Circuits NO.	1	2	3	4	5	6	N-2	N-1	N
Circuits TYPE	1	2	3	4	5	6	N-2	N-1	N
2P	A	B							
3P	A	B	A						
4P	A	B	B	A					
5P	A	B	-	B	A				
6P	-	A	B	B	A	-			
7P~20P	-	A	B	-	-	-	B	A	-

A2	CHANGE THE DRAWING	2022.06.06
A1	CHANGE THE DRAWING	2020.10.12
A0	NEW RELEASE	2012.08.20
REV	DESCRIPTION	DATE

Ordering Information:

A2008WRA-XP - *** - **

1 2 3

1.Part NO.

2.Size D & Style:

(Blank): 3.20mm, Type 1, With K

D25: 2.50mm, Type 1, With K

D30: 3.00mm, Type 1, With K

D21: 2.10mm, Type 2, Without K

3.Color:

(Blank): Ivory

BK:Black BL:Blue

GN:Green RD:Red

YL:Yellow

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66, UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2008WRA-2P	2.00	7.70	5.30
A2008WRA-3P	4.00	9.70	7.30
A2008WRA-4P	6.00	10.30	9.30
A2008WRA-5P	8.00	12.30	11.30
A2008WRA-6P	10.00	14.30	13.30
A2008WRA-7P	12.10	16.40	15.50
A2008WRA-8P	14.10	18.40	17.50
A2008WRA-9P	16.20	20.50	19.60
A2008WRA-10P	18.20	22.50	21.60
A2008WRA-11P	20.20	24.60	23.60
A2008WRA-12P	22.20	26.60	25.70
A2008WRA-13P	24.20	28.70	27.70
A2008WRA-14P	26.20	30.70	29.70
A2008WRA-15P	28.30	32.80	31.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.00mm PITCH RIGHT-ANGLE WAFER	
DRWN	CHKD	APPR	DRAWING NO.	
Wenmin Luo	Diankui Wan	Jack Yin	A2008WRA-XP	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A2	