
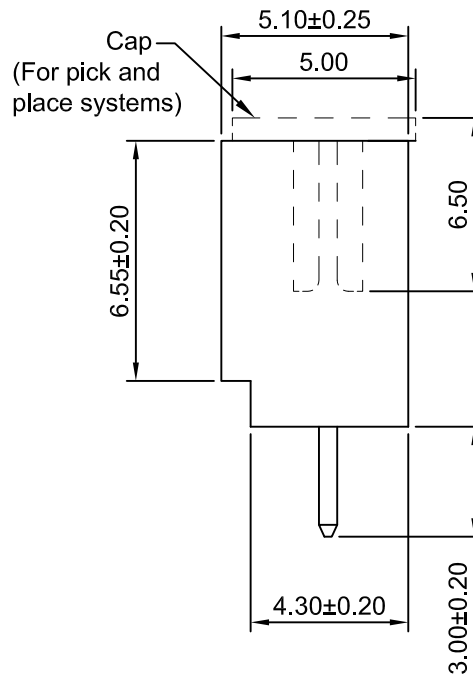

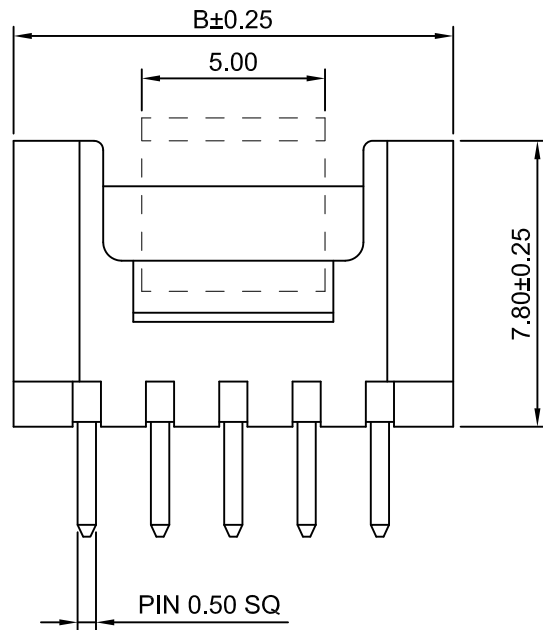


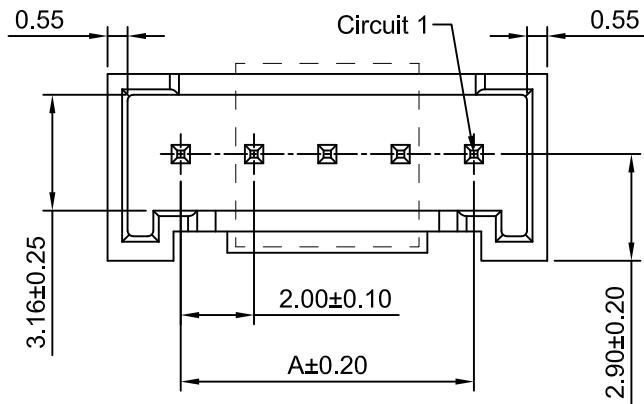

Ordering Information:

A2008WV-XP - LCP - *** - *** - CRE
1 2 3 4 5

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

46: Nylon 46,UL94V-0(Beige)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

LCP:LCP,UL94V-0(Beige)

3.Color:

(Blank): see section material

BK: Black BL: Blue

RD: Red YL: Yellow

GY: Gray GN: Green

4.Finish:


(Blank): Tin over Nickel

G: Gold over Nickel

5.Packing:

(Blank): Bag

CRE: Tape & Reel with cap



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part No.	Dimensions(mm)	
	A	B
A2008WV- 2P	2.00	6.00
A2008WV- 3P	4.00	8.00
A2008WV- 4P	6.00	10.00
A2008WV- 5P	8.00	12.00
A2008WV- 6P	10.00	14.00
A2008WV- 7P	12.00	16.00
A2008WV- 8P	14.00	18.00
A2008WV- 9P	16.00	20.00
A2008WV- 10P	18.00	22.00
A2008WV- 11P	20.00	24.00
A2008WV- 12P	22.00	26.00
A2008WV- 13P	24.00	28.00
A2008WV- 14P	26.00	30.00
A2008WV- 15P	28.00	32.00
A2008WV- 16P	30.00	34.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1		
DRAWN	CHK	APVD	2.00mm PITCH 180° DIP WAFER	
Haisen Li	DianKui Wan	Jack Yin		
General Tolerance		THIRD ANGLE PROJECTION	DRAWING NO	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
			A2008WV-XP-LCP-CRE	REV A0