

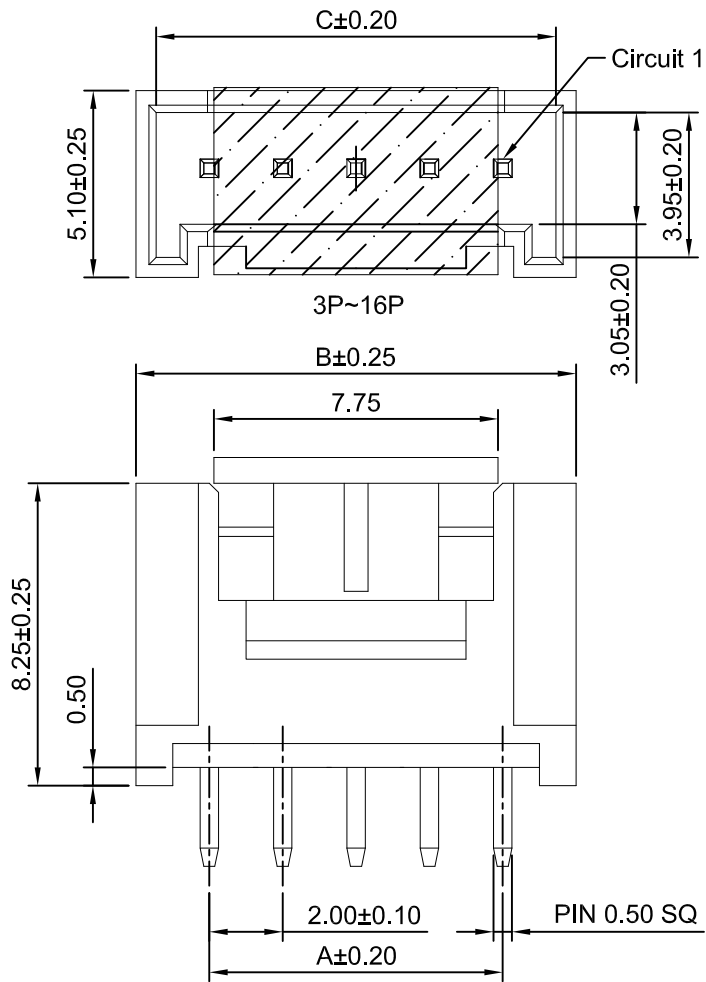


P.C.B LAYOUT
TOLERANCE:±0.05



2P

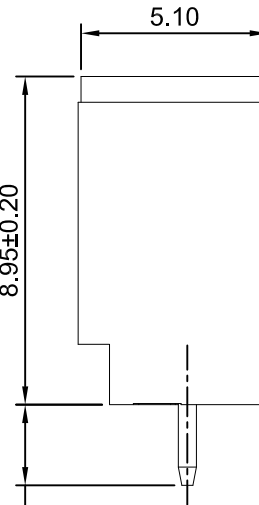

D(2.20±0.25)

Ordering Information:

A2008WV-XP-P-LCP - ^{**}/₂ - D22 - ^{***}/₃

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G:Gold over Nickel (Au:1u")


G3: Gold over Nickel(Au:3u")

G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

3.Packing:

(Blank): Tape & Reel with cap



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions




Circuits	Dimensions(mm)		
	A	B	C
A2008WV-2P-P-LCP	2.00	6.00	4.90
A2008WV-3P-P-LCP	4.00	8.00	6.90
A2008WV-4P-P-LCP	6.00	10.00	8.90
A2008WV-5P-P-LCP	8.00	12.00	10.90
A2008WV-6P-P-LCP	10.00	14.00	12.90
A2008WV-7P-P-LCP	12.00	16.00	14.90
A2008WV-8P-P-LCP	14.00	18.00	16.90
A2008WV-9P-P-LCP	16.00	20.00	18.90
A2008WV-10P-P-LCP	18.00	22.00	20.90
A2008WV-11P-P-LCP	20.00	24.00	22.90
A2008WV-12P-P-LCP	22.00	26.00	24.90
A2008WV-13P-P-LCP	24.00	28.00	26.90
A2008WV-14P-P-LCP	26.00	30.00	28.90
A2008WV-15P-P-LCP	28.00	32.00	30.90
A2008WV-16P-P-LCP	30.00	34.00	32.90

CJTconn







CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		5:1		1 of 1			
DRAWN		CHK'D		APPR'D		2.00mm PITCH VERTICAL WAFER	
Haisen Li		Diankui Wan		Jack Yin			
General Tolerances			THIRD ANGLE PROJECTION			DRAWING NO.	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
						REV A2	

A2	JL-GC-ECN00254	2024.04.01
A1	CHANGE THE DRAWING	2023.07.07
A0	NEW RELEASE	2020.10.12
REV	DESCRIPTION	DATE

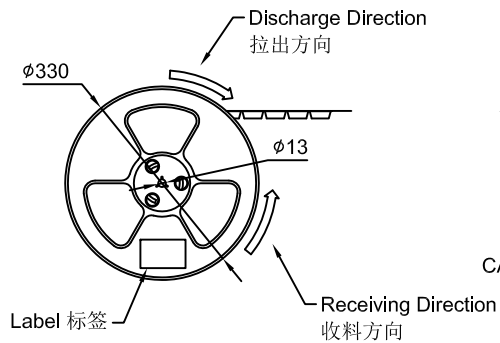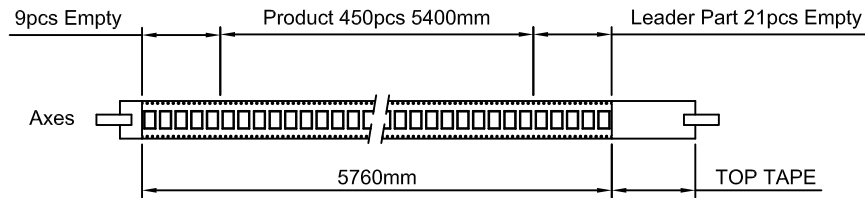

Single hole:None Hole Side
单孔: 贴无链孔侧
Double hole:Elliptical Hole Side
双孔: 贴椭圆孔侧

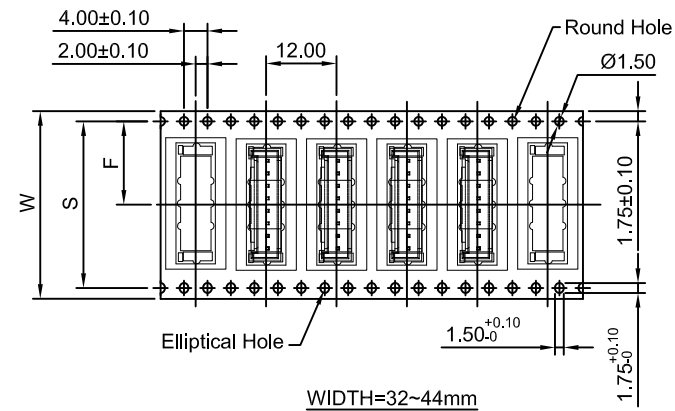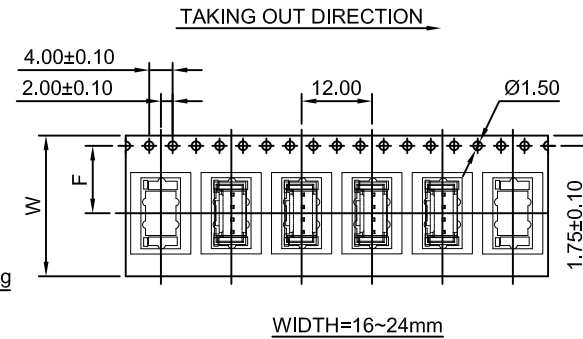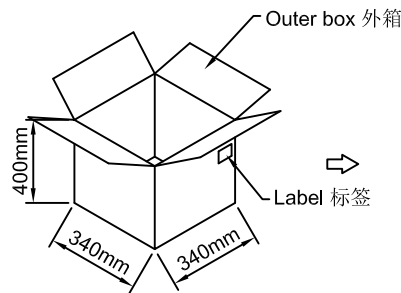

Circuits	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
2P~3P	16.00	/	7.50	20.50	16.50	450	19	8550
4P~6P	24.00	/	11.50	28.50	24.50	450	13	5850
7P~8P	32.00	28.40	14.20	36.50	32.50	450	10	4500
10P 12P 14P	44.00	40.40	20.20	48.50	44.50	450	7	3150

NOTES:

- Carrier Camber Is Within 1mm In 100mm;带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.20mm;圆孔十个孔距离累计允许公差为±0.20mm

A0	NEW RELEASE	2024.11.16
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet	TITLE		
mm	1:1.25	1 of 1	2.00mm PITCH VERTICAL WAFER PACKING		
DRAWN	CHK'D	APPR			
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2008WV-XP-P-LCP-D22		A0