
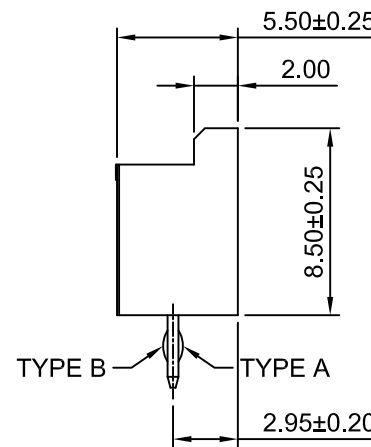
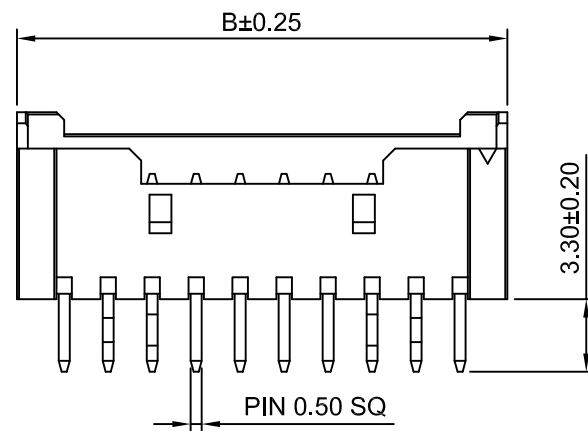

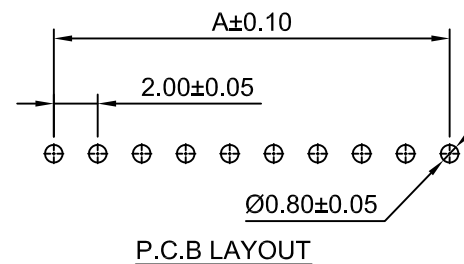



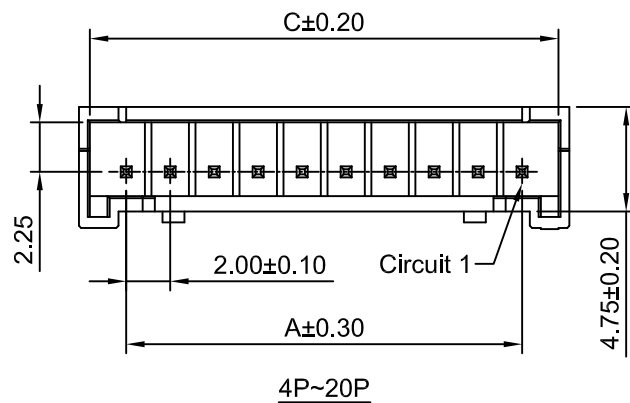

SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	7.70	5.30	9P	16.00	20.50	19.60
3P	4.00	9.70	7.30	10P	18.00	22.50	21.60
4P	6.00	10.30	9.30	11P	20.00	24.60	23.60
5P	8.00	12.30	11.30	12P	22.00	26.60	25.70
6P	10.00	14.30	13.30	13P	24.00	28.70	27.70
7P	12.00	16.40	15.50	14P	26.00	30.70	29.70
8P	14.00	18.40	17.50	15P	28.00	32.80	31.60

With K To Choose the type(A Or B)

Circuits	Circuits NO.	1	2	3	4	5	6	N-2	N-1	N
	TYPE									
2P	A	B								
3P	A	B	A							
4P	A	B	B	A						
5P	A	B	-	B	A					
6P	-	A	B	B	A	-				
7P~20P	-	A	B	-	-	-	B	A	-	

Ordering Information:

A2008WVA-XP - **
1 2

1.Part NO.

2.Color:

(Blank):Ivory RD:Red
BK:Black YL:Yellow
BL:Blue GN:Green

A3	CHANGE THE DRAWING	2022.10.20
A2	ADD THE SIZE	2019.11.12
A1	CHANGE THE DRAWING	2011.07.28
A0	NEW RELEASE	2011.07.28
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRAWN	CHK'D	APPR	2.00mm Pitch	
Haisen Li	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	Vertical Wafer	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
			DRAWING NO.	REV
			A2008WVA-XP	A3