
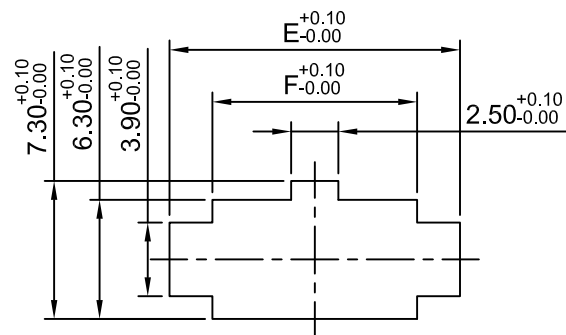


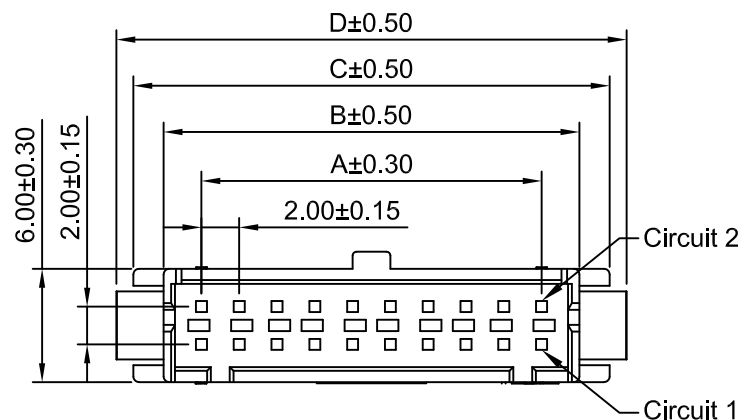

Panel Hole Layout
Thickness:1.00~1.60mm

Ordering Information:

A2009HM-2xXP - ***
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(Black)

GWT: Nylon 66,UL94V-0(Black),

IEC 60335-1,5th Edition

Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C


Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 800V AC/minute

Ordering Information & Dimensions


Circuits	Dimensions(mm)					
	A	B	C	D	E	F
A2009HM-2x2P	2.00	6.00	9.20	11.00	9.40	6.30
A2009HM-2x3P	4.00	8.00	11.20	13.00	11.40	8.30
A2009HM-2x4P	6.00	10.00	13.20	15.00	13.40	10.30
A2009HM-2x5P	8.00	12.00	15.20	17.00	15.40	12.30
A2009HM-2x6P	10.00	14.00	17.20	19.00	17.40	14.30
A2009HM-2x7P	12.00	16.00	19.20	21.00	19.40	16.30
A2009HM-2x8P	14.00	18.00	21.20	23.00	21.40	18.30
A2009HM-2x9P	16.00	20.00	23.20	25.00	23.40	20.30
A2009HM-2x10P	18.00	22.00	25.20	27.00	25.40	22.30
A2009HM-2x11P	20.00	24.00	27.20	29.00	27.40	24.30
A2009HM-2x12P	22.00	26.00	29.20	31.00	29.40	26.30
A2009HM-2x13P	24.00	28.00	31.20	33.00	31.40	28.30
A2009HM-2x14P	26.00	30.00	33.20	35.00	33.40	30.30
A2009HM-2x15P	28.00	32.00	35.20	37.00	35.40	32.30
A2009HM-2x16P	30.00	34.00	37.20	39.00	37.40	34.30

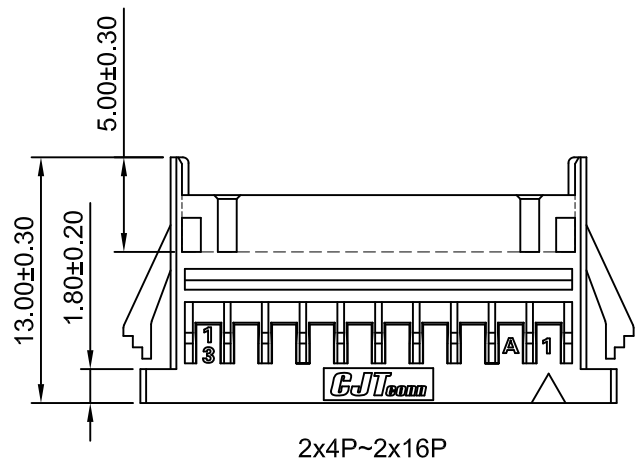


2x4P~2x16P



2x2P



2x3P

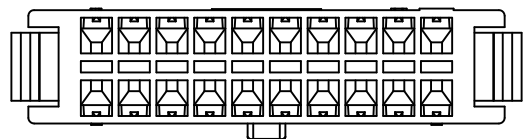

CJT

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1	2.00mm PITCH DUAL ROW HOUSING	
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A2009HM-2xXP	A0

A0	NEW RELEASE	2022.07.16
REV	DESCRIPTION	DATE