
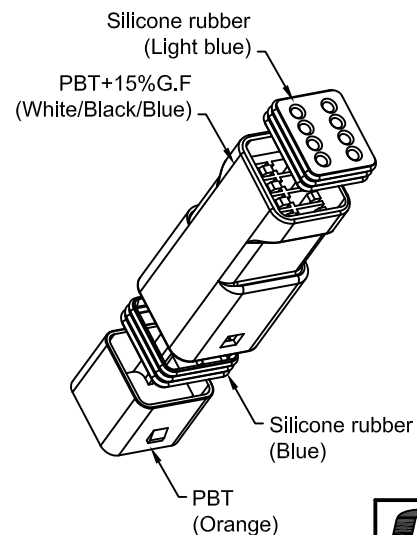
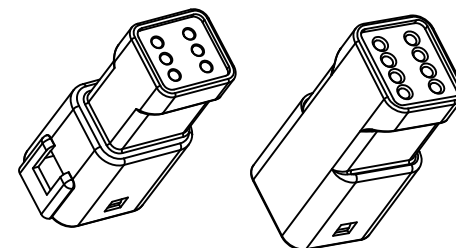
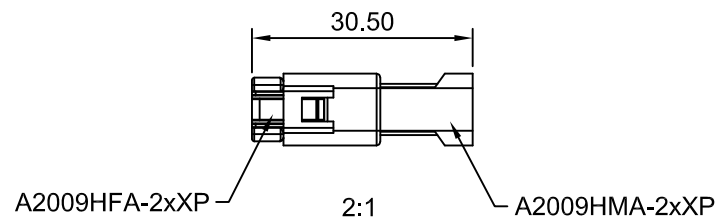
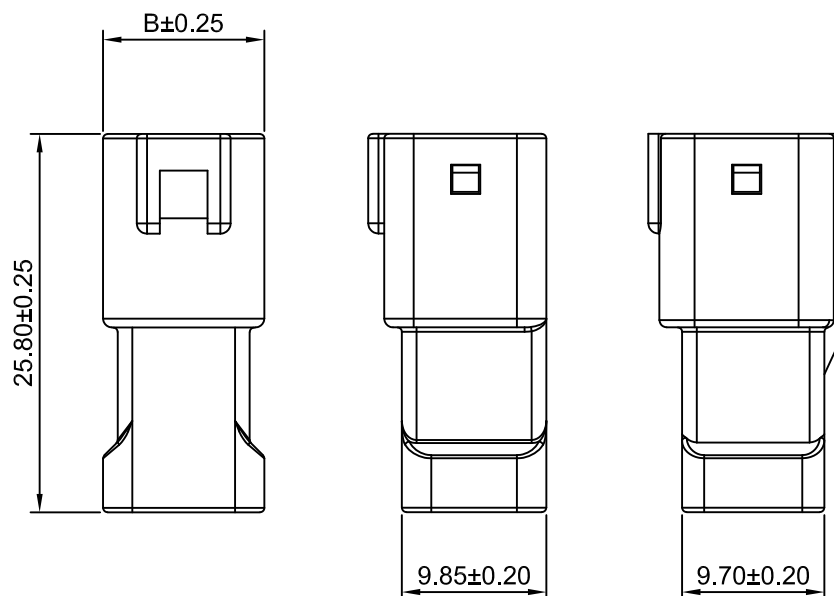


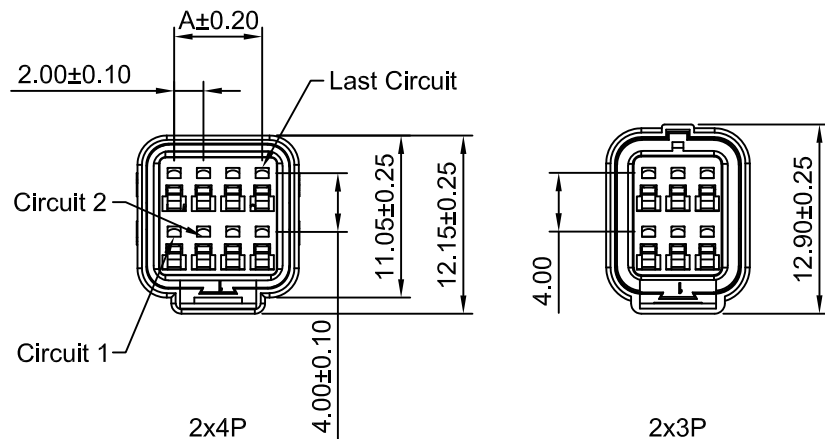

Ordering Information:

A2009HMA-XP - ***

1. Part NO.

2. Color:

(Blank): White

BK: Black

BL: Blue

SPECIFICATIONS:

Current Rating: 3A AC, DC
Voltage Rating: 100V AC, DC
Temperature Range: -55°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Material: PBT+15%G.F, UL94V-0(White)
Ingress Protection: IPX7 of IEC60529

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2009HMA-2x3P	4.00	9.80
A2009HMA-2x4P	6.00	11.00

CJTconn CHANGJIANG CONNECTORS CO., LTD.

A4	CHANGE THE INFORMATION	2021.03.12
A3	CHANGE THE TEMPERATURE RANGE	2019.09.30
A2	ADD THE INGRESS PROTECTION	2019.08.12
A1	CHANGE THE DRAWING	2019.05.07
A0	NEW RELEASE	2018.12.10
REV	DESCRIPTION	DATE

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	2.00x4.00mm PITCH DUAL ROW HOUSING	
DRWN	CHK'D	APPR	DRAWING NO.	
Dengchun Yi	Diankui Wan	Jack Yin	A2009HMA-2xXP	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A4	