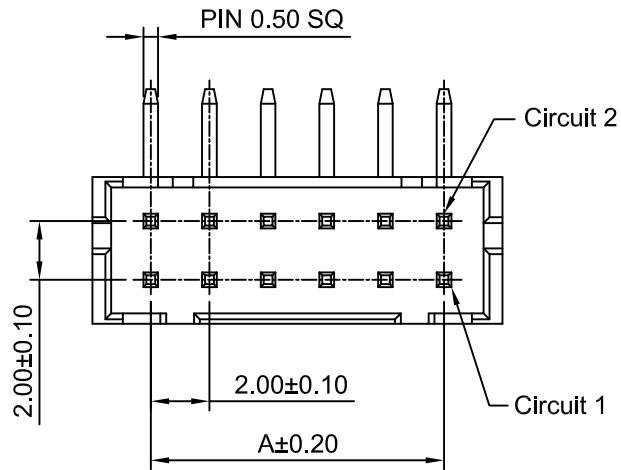


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A2009WR-2xXP - ***


1 2

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel (Au:1u")



SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin over Nickel


Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions


Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.00	6.00	2x12P	22.00	26.00
2x3P	4.00	8.00	2x13P	24.00	28.00
2x4P	6.00	10.00	2x14P	26.00	30.00
2x5P	8.00	12.00	2x15P	28.00	32.00
2x6P	10.00	14.00	2x16P	30.00	34.00
2x7P	12.00	16.00	2x17P	32.00	36.00
2x8P	14.00	18.00	2x18P	34.00	38.00
2x9P	16.00	20.00	2x19P	36.00	40.00
2x10P	18.00	22.00	2x20P	38.00	42.00
2x11P	20.00	24.00			

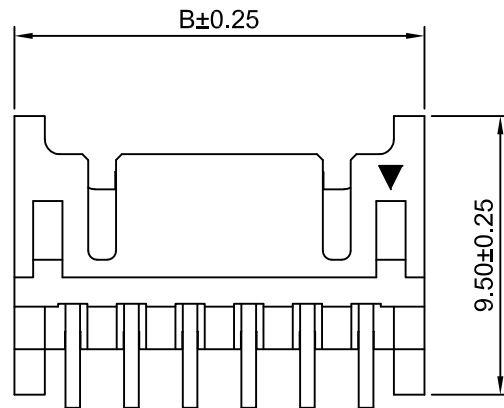

2x3P~2x20P



2x2P

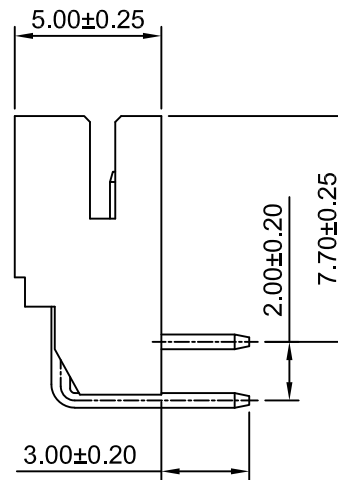

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

General Tolerance

A1	CHANGE THE INFORMATION	2019.12.18	x.x±0.25	PROJECT
A0	NEW RELEASE	2005.05.10	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

Title :

2.00mm PITCH

90° DUAL ROW WAFER

DRAW NO : A2009WR-2xXP

REV
A1