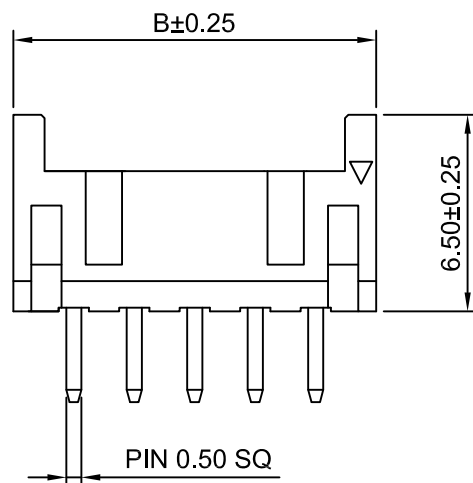
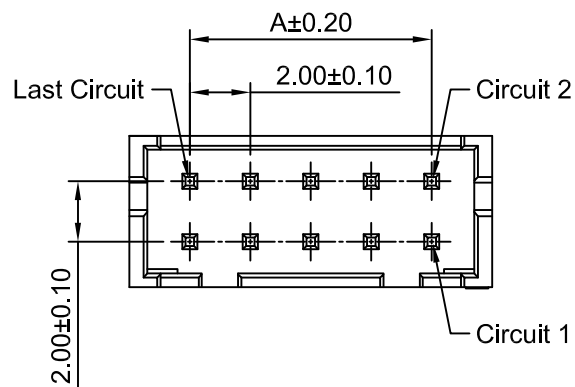


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:


A2009WV-2xXP-9T - *
1 2

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

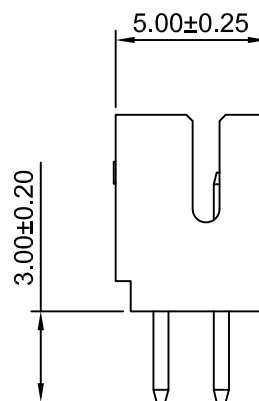

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass

Material: Nylon 9T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2009WV-2x2P-9T	2.00	6.00
A2009WV-2x3P-9T	4.00	8.00
A2009WV-2x4P-9T	6.00	10.00
A2009WV-2x5P-9T	8.00	12.00
A2009WV-2x6P-9T	10.00	14.00
A2009WV-2x7P-9T	12.00	16.00
A2009WV-2x8P-9T	14.00	18.00
A2009WV-2x9P-9T	16.00	20.00
A2009WV-2x10P-9T	18.00	22.00
A2009WV-2x11P-9T	20.00	24.00
A2009WV-2x12P-9T	22.00	26.00
A2009WV-2x13P-9T	24.00	28.00
A2009WV-2x14P-9T	26.00	30.00
A2009WV-2x15P-9T	28.00	32.00
A2009WV-2x16P-9T	30.00	34.00
A2009WV-2x17P-9T	32.00	36.00
A2009WV-2x18P-9T	34.00	38.00
A2009WV-2x19P-9T	36.00	40.00
A2009WV-2x20P-9T	38.00	42.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	2.00mm PITCH VERTICAL DUAL ROW HEADER	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A2009WV-2xXP-9T	
THIRD ANGLE PROJECTION			REV A1	

A1	CHANGE THE DRAWING	2021.11.08
A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE

x,x±0.25
x,x,x±0.20
x,x,x,x±0.15
ANGLES ±1°

