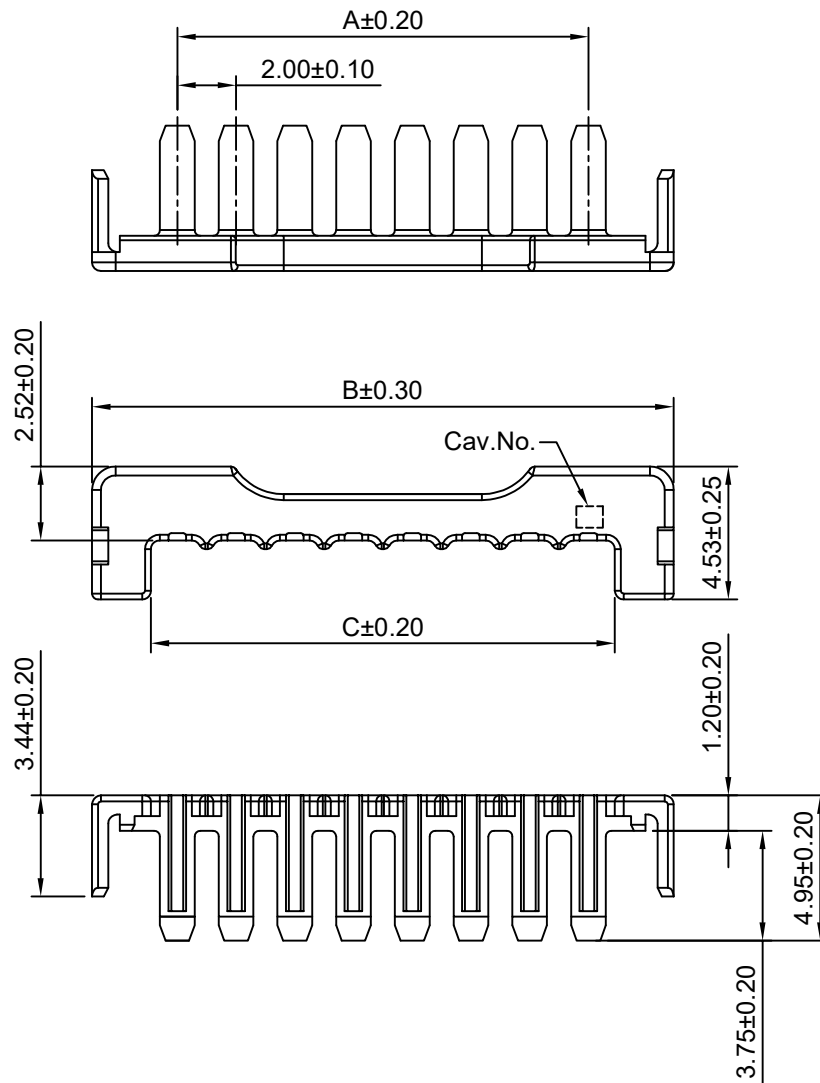


SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

Contact Resistance: $30\text{m}\Omega$ Max

Insulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1000V AC/minute

Material: PBT+Glass Fiber, UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
A2010BS-2P	2.00	7.80	3.80
A2010BS-3P	4.00	9.80	5.80
A2010BS-4P	6.00	11.80	7.80
A2010BS-5P	8.00	13.80	9.80
A2010BS-6P	10.00	15.80	11.80
A2010BS-7P	12.00	17.80	13.80
A2010BS-8P	14.00	19.80	15.80
A2010BS-9P	16.00	21.80	17.80
A2010BS-10P	18.00	23.80	19.80
A2010BS-11P	20.00	25.80	21.80
A2010BS-12P	22.00	27.80	23.80
A2010BS-13P	24.00	29.80	25.80
A2010BS-14P	26.00	31.80	27.80
A2010BS-15P	28.00	33.80	29.80

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	4:1	1 of 1	
DRAWN	CHKD	APPR	
Jianying Zhu	Diankui Wan	Jack Yin	2.00MM PITCH SEAL
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
DRAWING NO.			
A2010BS-XP			
REV			A0