

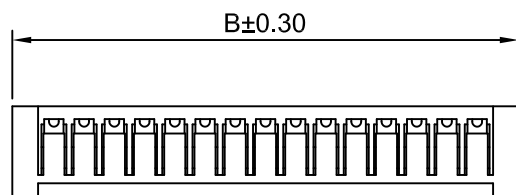
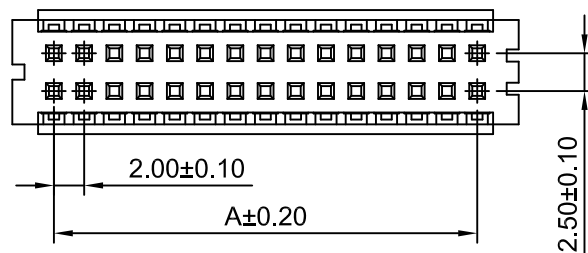
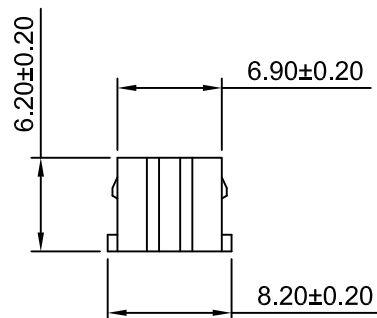


2x5P~2x14P

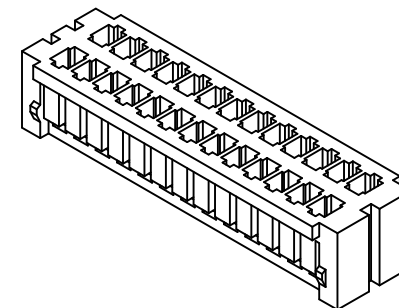

2x15P~2x30P

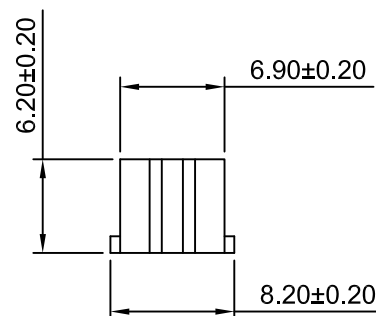

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0,(Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x5P	8.00	13.50	2x13P	24.00	29.50
2x6P	10.00	15.50	2x14P	26.00	31.50
2x7P	12.00	17.50	2x15P	28.00	33.50
2x8P	14.00	19.50	2x16P	30.00	35.50
2x9P	16.00	21.50	2x17P	32.00	37.50
2x10P	18.00	23.50	2x20P	38.00	43.50
2x11P	20.00	25.50	2x25P	48.00	53.50
2x12P	22.00	27.50	2x30P	58.00	63.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.00mm PITCH	
mm		2:1		1 of 1			
Draw By:		Approved :				Dual Row Housing	
Diankui Wan		Jack Yin					
2		General Tolerance				DRAW NO : A2010HA-2xXP	
3		PROJECT					
0		x.x±0.25					
REV		x.xx±0.20					
		x.xxx±0.15				REV A2	

Dual Row Housing

REV A2