


SPECIFICATIONS:

Current Rating: 6.5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Material: Nylon 66, UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2010HE-2P	2.00	6.55	8.55
A2010HE-3P	4.00	8.55	10.55
A2010HE-4P	6.00	10.55	12.55
A2010HE-5P	8.00	12.55	14.55
A2010HE-6P	10.00	14.55	16.55
A2010HE-7P	12.00	16.55	18.55
A2010HE-8P	14.00	18.55	20.55
A2010HE-9P	16.00	20.55	22.55
A2010HE-10P	18.00	22.55	24.55
A2010HE-11P	20.00	24.55	26.55
A2010HE-12P	22.00	26.55	28.55
A2010HE-13P	24.00	28.55	30.55
A2010HE-14P	26.00	30.55	32.55
A2010HE-15P	28.00	32.55	34.55
A2010HE-16P	30.00	34.55	36.55

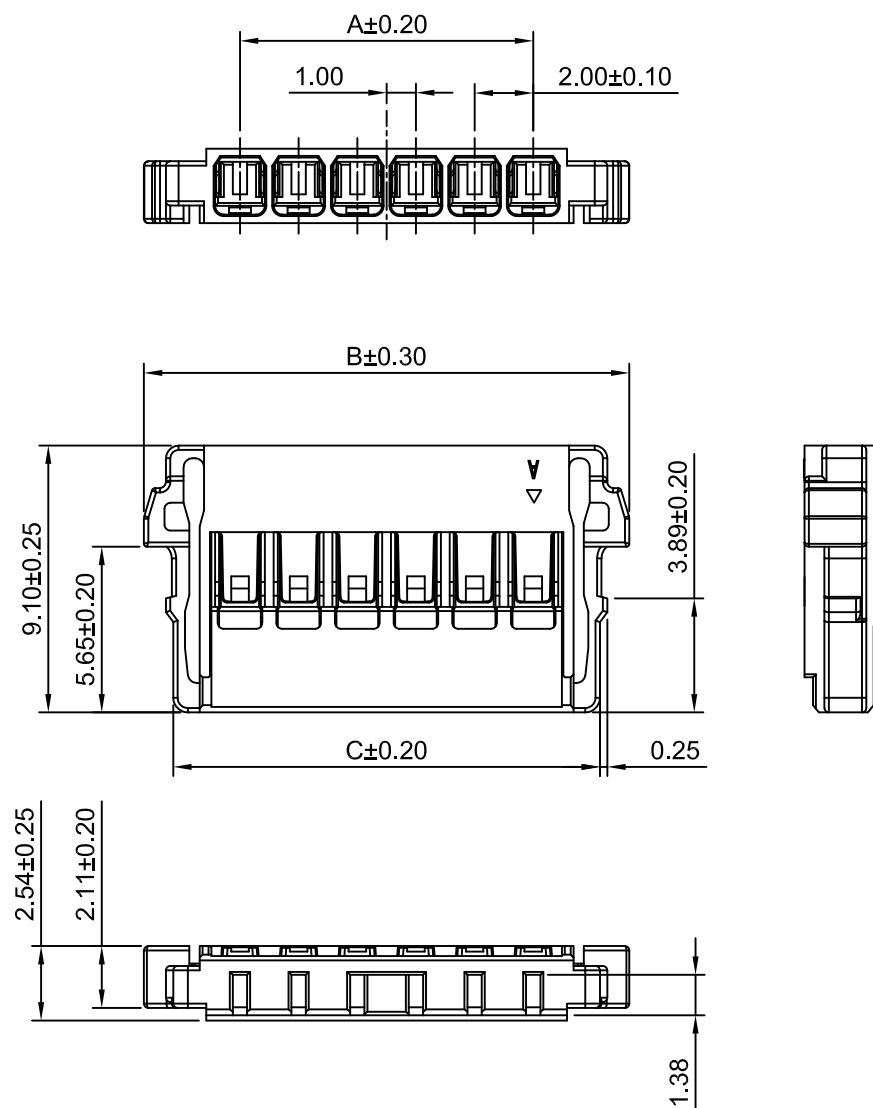

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH HOUSING	
Wenmin Luo	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A0	NEW RELEASE	2021.01.07
REV	DESCRIPTION	DATE