
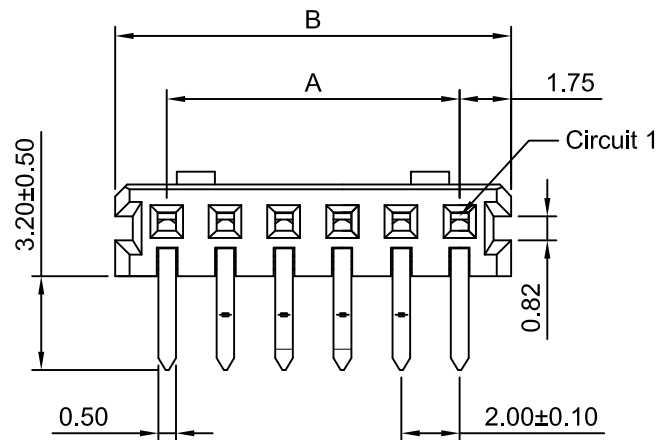
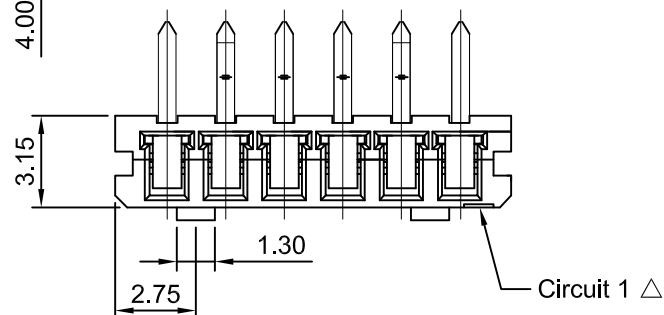

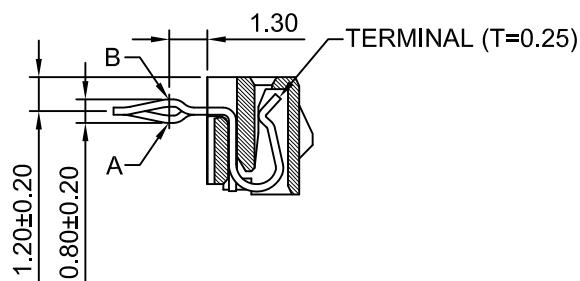


SPECIFICATIONS:

Current Rating: 1.5A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: PBT +15%GF,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2010HWRF-3P	4.00	7.50
A2010HWRF-4P	6.00	9.50
A2010HWRF-5P	8.00	11.50
A2010HWRF-6P	10.00	13.50
A2010HWRF-7P	12.00	15.50
A2010HWRF-8P	14.00	17.50
A2010HWRF-9P	16.00	19.50
A2010HWRF-10P	18.00	21.50
A2010HWRF-11P	20.00	23.50
A2010HWRF-12P	22.00	25.50
A2010HWRF-13P	24.00	27.50
A2010HWRF-14P	26.00	29.50
A2010HWRF-15P	28.00	31.50
A2010HWRF-16P	30.00	33.50
A2010HWRF-17P	32.00	35.50
A2010HWRF-18P	34.00	37.50
A2010HWRF-19P	36.00	39.50
A2010HWRF-20P	38.00	41.50

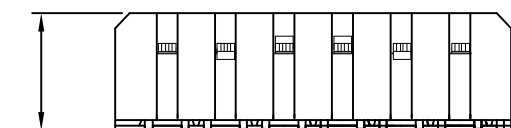

Circuits	1	2	3	4	5	N-2	N-1	N
3P	A	B	A					
4P	A	B	B	A				
5P	A	B	---	B	A			
6P~20P	---	A	B	---	---	B	A	---

A1	CHANGE THE DRAWING	2023.02.28
A0	NEW RELEASE	2020.09.19
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			TITLE 2.00mm PITCH HOUSING ULTRA LOW PROFILE
Unit	Scale	Sheet	
mm	4:1	1 of 1	
DRAWN	CHKD	APPR	
Chengbiao Ye	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
>0.5~10±0.20 >10~30±0.25 >30±0.30 ANGLES ±3°			
DRAWING NO.			REV
A2010HWRF-XP			A1