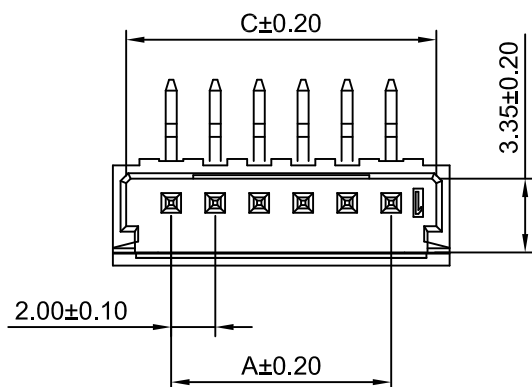
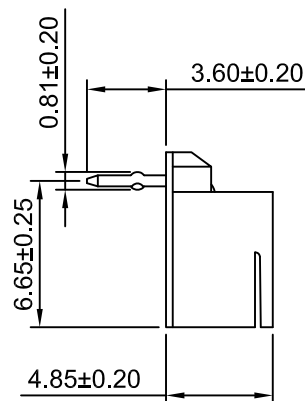
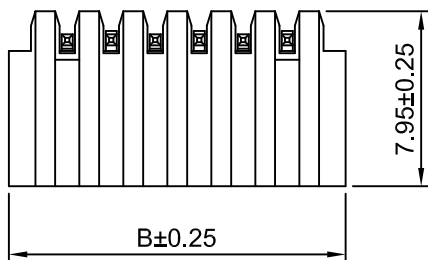




P.C.B LAYOUT
TOLERANCE: ± 0.05

SPECIFICATIONS:

Current Rating: 2.5A AC,DC (AWG #22)
Voltage Rating: 125V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: 20m Ω Max
Insulation Resistance: 1000M Ω Min
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66+15%GF,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2010WRA-2P	2.00	7.30	6.10
A2010WRA-3P	4.00	9.30	8.10
A2010WRA-4P	6.00	11.30	10.10
A2010WRA-5P	8.00	13.30	12.10
A2010WRA-6P	10.00	15.30	14.10
A2010WRA-7P	12.00	17.30	16.10
A2010WRA-8P	14.00	19.30	18.10
A2010WRA-9P	16.00	21.30	20.10
A2010WRA-10P	18.00	23.30	22.10
A2010WRA-11P	20.00	25.30	24.10
A2010WRA-12P	22.00	27.30	26.10
A2010WRA-13P	24.00	29.30	28.10
A2010WRA-14P	26.00	31.30	30.10
A2010WRA-15P	28.00	33.30	32.10

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH 90° SINGLE ROW DIP WAFER	
Dengchun Yi	Dlankul Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx $\pm$ 0.25 x.xxx $\pm$ 0.20 x.xxxx $\pm$ 0.15 ANGLES $\pm 1^{\circ}$			A2010WRA-XP	A1

A0	NEW RELEASE	2018.12.03
REV	DESCRIPTION	DATE