
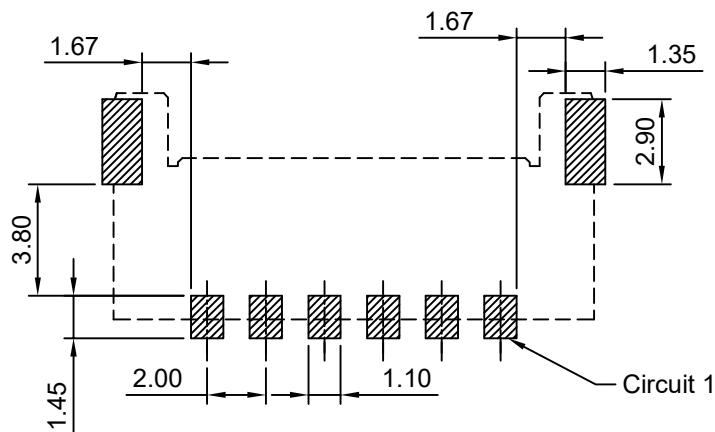

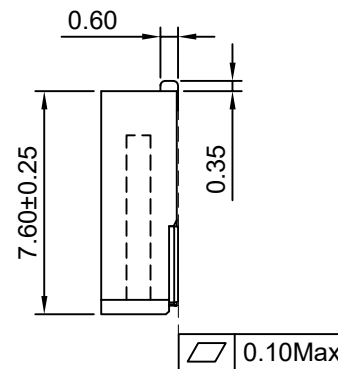


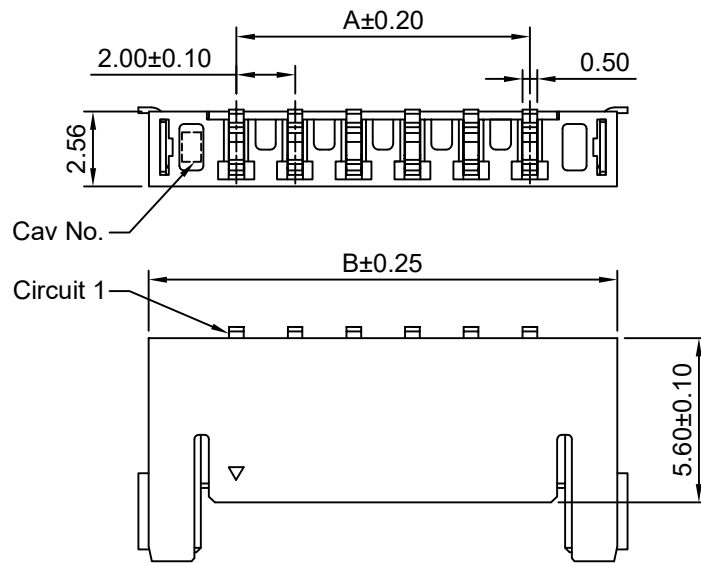

SPECIFICATIONS:

Current Rating: 6.5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Gold over Nickel
Solder tabs: Brass/Tin over Nickel
Material: Nylon 4T,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
A2010WRE-S-2P	2.00	7.95
A2010WRE-S-3P	4.00	9.95
A2010WRE-S-4P	6.00	11.95
A2010WRE-S-5P	8.00	13.95
A2010WRE-S-6P	10.00	15.95

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	2.00mm PITCH RIGHT-ANGLE SINGLE ROW PIN HEADER - SMD TYPE	
DRAWN	CHK'D	APPR	DRAWING NO.	REV
Jianying Zhu	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	A2010WRE-S-XP	A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A1		
A0	NEW RELEASE	2023.10.13
REV	DESCRIPTION	DATE