

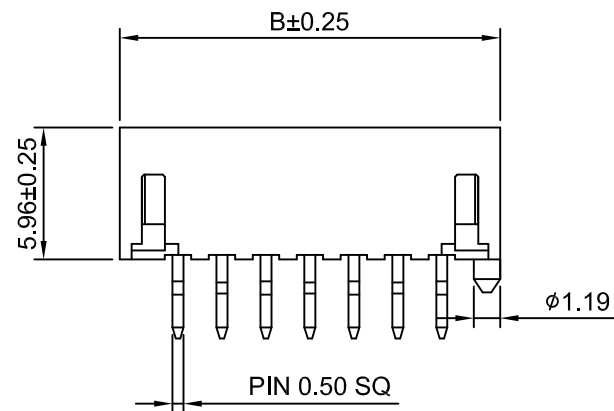
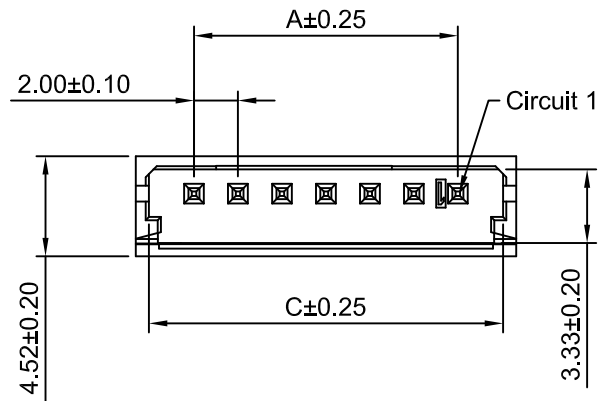



P.C.B LAYOUT
TOLERANCE:±0.05



Detail C
Scale:2:1



Circuits	1	2	3	4	5	6	7
2P	A	B					
3P	A	B	A				
4P	A	B	A	B			
5P	A	B	A	B	A		
6P	A	B	A	B	A	B	
7P	A	B	A	B	A	B	A



SPECIFICATIONS:

Current Rating: 2.5A AC,DC (AWG #22)
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66+15%GF,UL94V-0(Creamy White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2010WVA-F-2P	2.00	7.30	6.10
A2010WVA-F-3P	4.00	9.30	8.10
A2010WVA-F-4P	6.00	11.30	10.10
A2010WVA-F-5P	8.00	13.30	12.10
A2010WVA-F-6P	10.00	15.30	14.10
A2010WVA-F-7P	12.00	17.30	16.10
A2010WVA-F-8P	14.00	19.30	18.10
A2010WVA-F-9P	16.00	21.30	20.10
A2010WVA-F-10P	18.00	23.30	22.10
A2010WVA-F-11P	20.00	25.30	24.10
A2010WVA-F-12P	22.00	27.30	26.10
A2010WVA-F-13P	24.00	29.30	28.10
A2010WVA-F-14P	26.00	31.30	30.10
A2010WVA-F-15P	28.00	33.30	32.10

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE		
mm		3:1		1 of 1				
DRWN		CHK'D		APPR				
Chengbiao Ye		Diankui Wan		Jack Yin		2.00mm Pitch 180° Single Row DIP Wafer		
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.				REV A2
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				A2010WVA-F-XP				

A2	CHANGE THE DRAWING	2023.02.28
A1	CHANGE THE DRAWING	2022.01.13
A0	NEW RELEASE	2017.04.28
REV	DESCRIPTION	DATE