
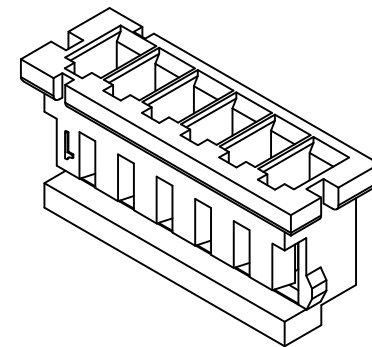
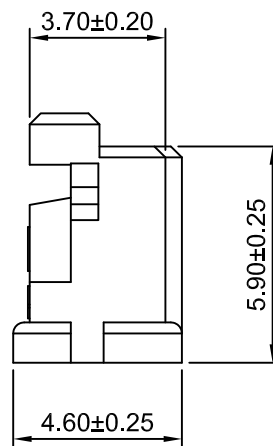
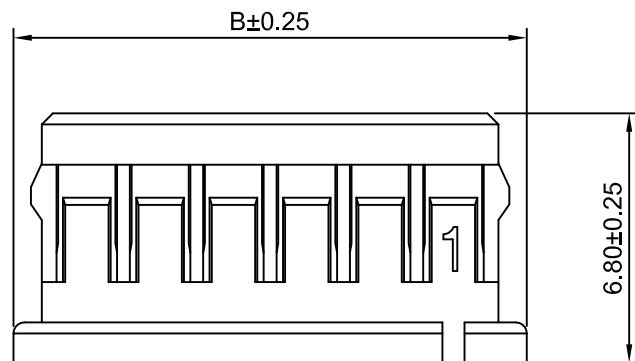


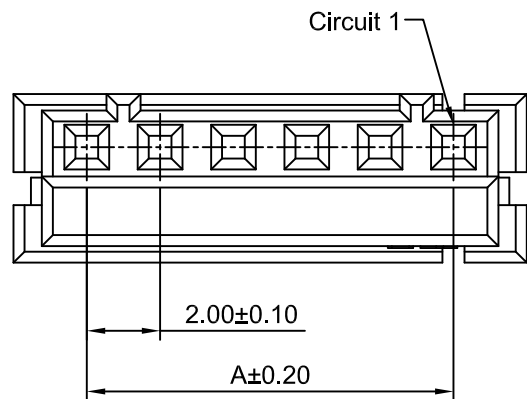

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 650V AC/minute

Material: Nylon 66,UL94V-0 (Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	9P	16.00	20.00
3P	4.00	8.00	10P	18.00	22.00
4P	6.00	10.00	11P	20.00	24.00
5P	8.00	12.00	12P	22.00	26.00
6P	10.00	14.00	13P	24.00	28.00
7P	12.00	16.00	14P	26.00	30.00
8P	14.00	18.00	15P	28.00	32.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		5:1		1 of 1			
DRAWN		CHK'D		APPR		2.00mm PITCH	
Haisen Li		Diankui Wan		Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		HOUSING			
x,xx±0.25 x.xxx±0.20 x,xxx±0.15 ANGLES ±1°							
8				DRAWING NO.			
0							
				A2011H-XP			
REV				REV			
				A1			