

Ordering Information:
A2011HA-XP - - - -
 1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): see section 2 materia

BK: Black YL: Yellow

RD: Red BL: Blue

PK: Pink GN: Green

BR: Brown OR: Orange

VI: Violet GY: Gray

PBL: Pale Blue

YGN: Yellowish Green

FOR: Fluorescent Orange

FYL: Fluorescence Yellow

4.Packing:

(Blank): Bag

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C


Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A2011HA-2P	2.00	7.40	4.80	2.70
A2011HA-3P	4.00	9.40	6.90	4.30
A2011HA-4P	6.00	11.40	8.90	4.70
A2011HA-5P	8.00	13.40	10.90	6.70
A2011HA-6P	10.00	15.40	12.90	6.70
A2011HA-7P	12.00	17.40	14.90	6.70
A2011HA-8P	14.00	19.40	16.90	6.70
A2011HA-9P	16.00	21.40	18.90	6.70
A2011HA-10P	18.00	23.40	20.90	6.70
A2011HA-11P	20.00	25.40	22.90	6.70
A2011HA-12P	22.00	27.40	24.90	6.70
A2011HA-13P	24.00	29.40	26.90	6.70
A2011HA-14P	26.00	31.40	28.90	6.70
A2011HA-15P	28.00	33.40	30.90	6.70

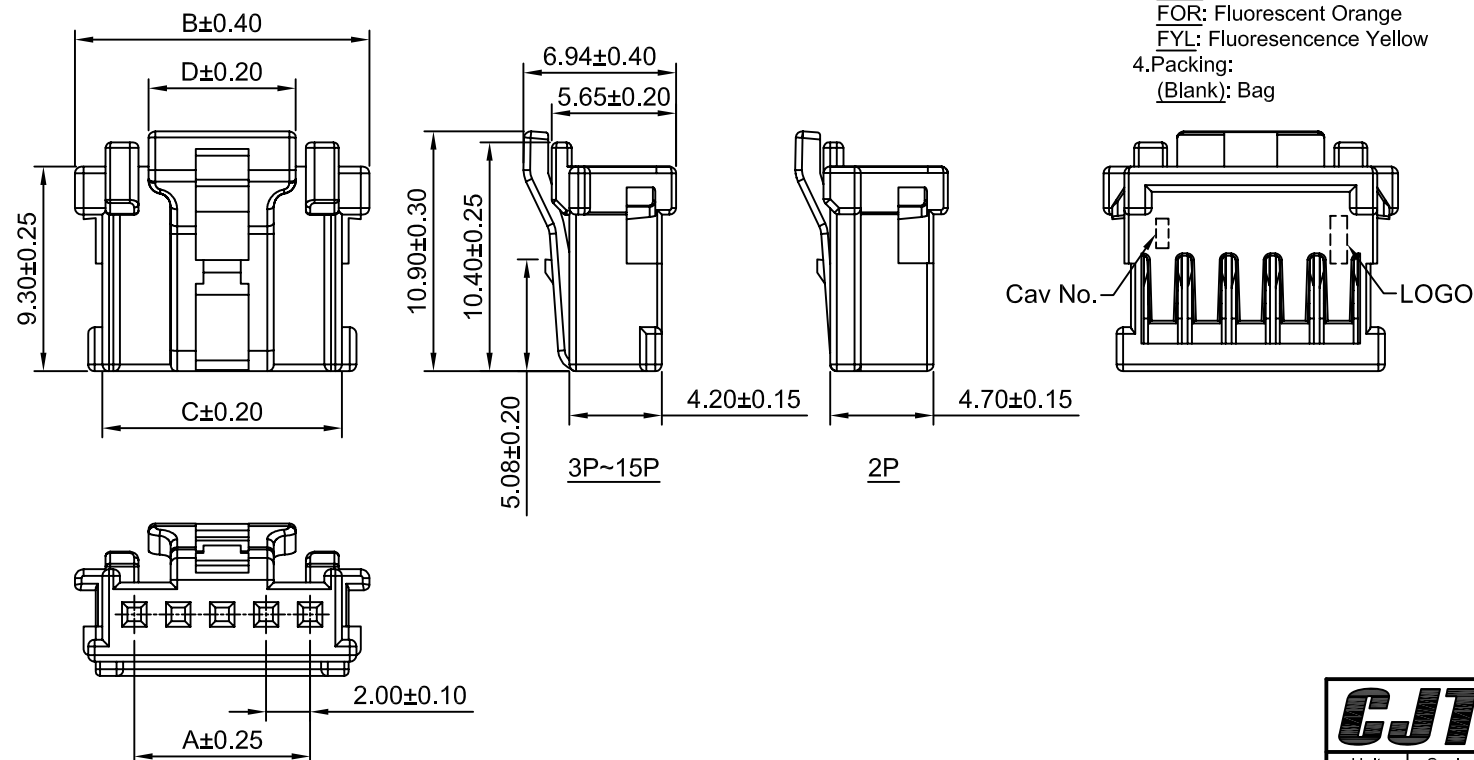

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	3:1	1 of 1	2.00mm PITCH HOUSING
DRAWN	CHK'D	APPR'D	
Jianying Zhu	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2011HA-XP
A1	CHANGE THE DRAWING	2024.02.26	REV A1
A0	NEW RELEASE	2023.12.14	
REV	DESCRIPTION	DATE	