

Ordering Information:






A2011WR-S-F-XP - **
1 2

1.Part No.

2.Finish:

(blank): Tin over Nickel

G: Gold over Nickel

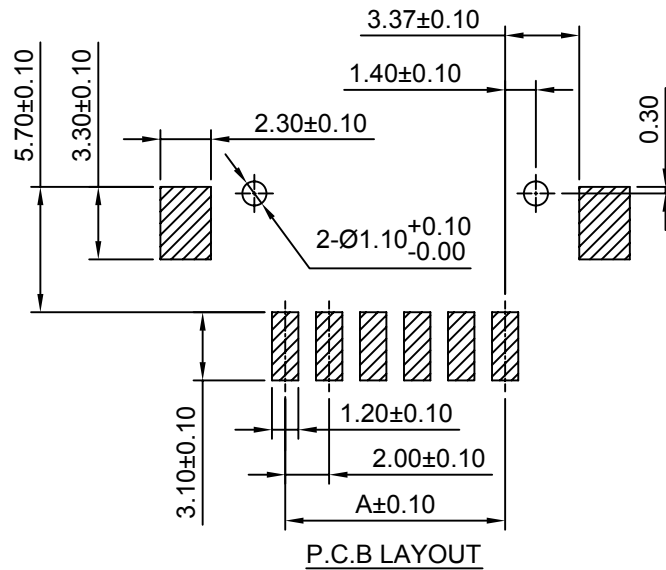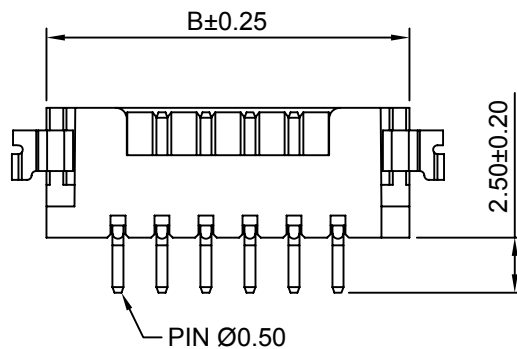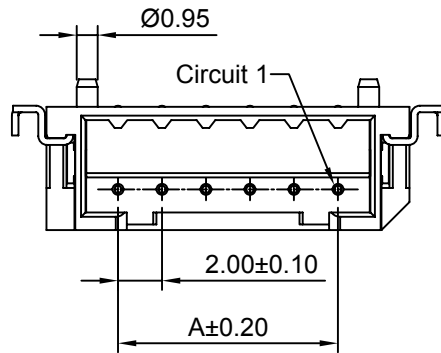

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 650V AC/minute

Pin Material: Brass/Tin over Nickel

Solder Tabs: Brass/Tin over Nickel

Material: Nylon 6T, UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	8.50	9P	16.00	22.50
3P	4.00	10.50	10P	18.00	24.50
4P	6.00	12.50	11P	20.00	26.50
5P	8.00	14.50	12P	22.00	28.50
6P	10.00	16.50	13P	24.00	30.50
7P	12.00	18.50	14P	26.00	32.50
8P	14.00	20.50	15P	28.00	34.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
Scale: 3:1
Sheet: 1 of 1

Draw BY:

LIZQ

Approved:

GONGYB

General Tolerance

x.xx±0.25

x.xx±0.20

x.xxx±0.15

ANGLE±



Title:

2.00mm PITCH
90° WAFER BOSS
- SMT TYPE

DRAW NO: A2011WR-S-F-XP

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.05.10