
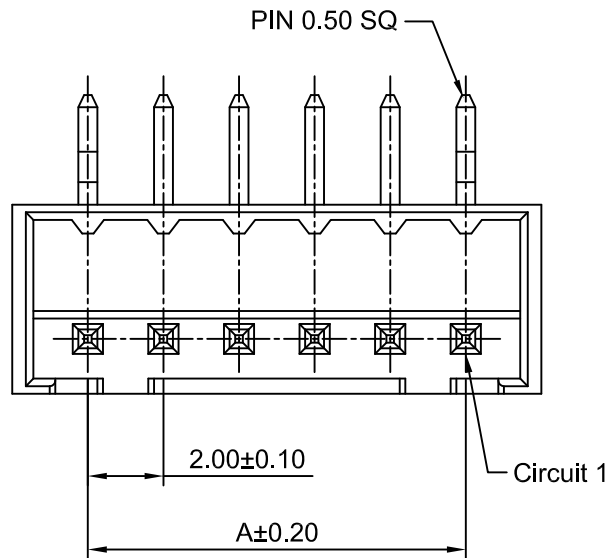

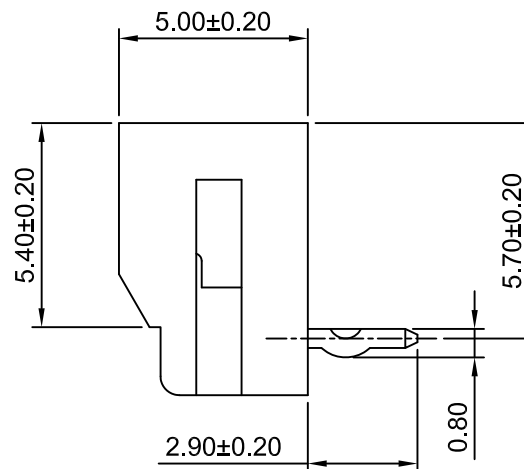


P.C.B LAYOUT
TOLERANCE:±0.05

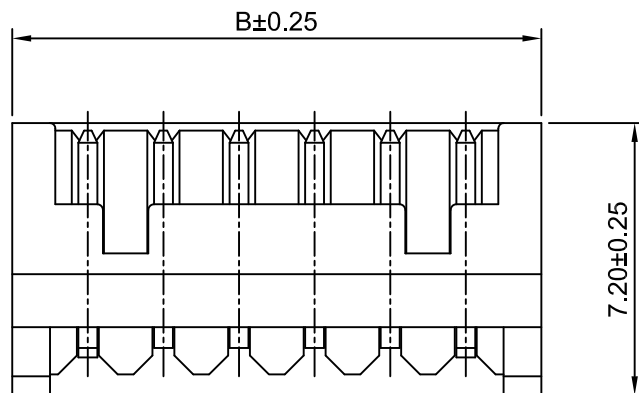

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 650V AC/minute
Pin Material: Brass/Gold over Nickel
Material: Nylon 6T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2011WR-2P-6T-G	2.00	6.00
A2011WR-3P-6T-G	4.00	8.00
A2011WR-4P-6T-G	6.00	10.00
A2011WR-5P-6T-G	8.00	12.00
A2011WR-6P-6T-G	10.00	14.00
A2011WR-7P-6T-G	12.00	16.00
A2011WR-8P-6T-G	14.00	18.00
A2011WR-9P-6T-G	16.00	20.00
A2011WR-10P-6T-G	18.00	22.00
A2011WR-11P-6T-G	20.00	24.00
A2011WR-12P-6T-G	22.00	26.00
A2011WR-13P-6T-G	24.00	28.00
A2011WR-14P-6T-G	26.00	30.00
A2011WR-15P-6T-G	28.00	32.00

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	5:1	1 of 1	
DRWN	CHK'D	APPR	2.00mm PITCH RIGHT-ANGLE WAFER
Dengchun Yi	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			A2011WR-XP-6T-G
A1	CHANGE THE DRAWING		REV A1
A0	NEW RELEASE		
REV	DESCRIPTION	DATE	