

Ordering Information:






A2011WV-S-XP - **
1 2

1.Part No.

2.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

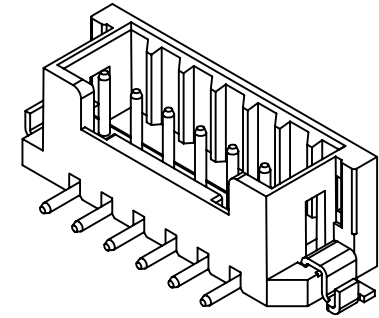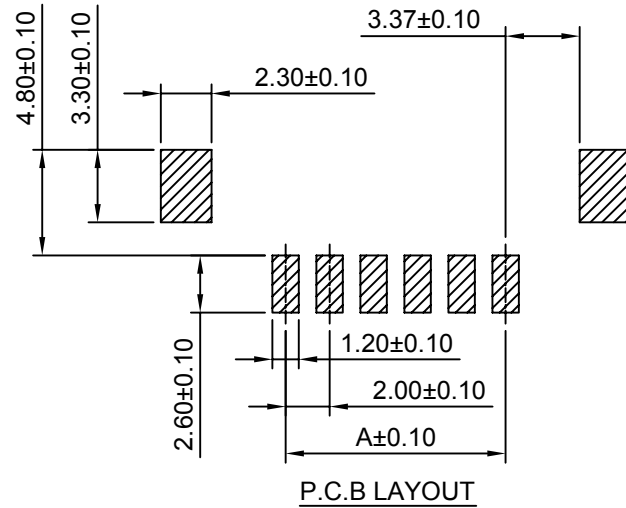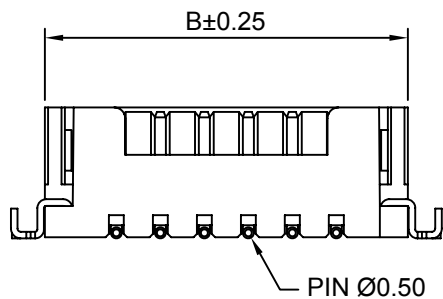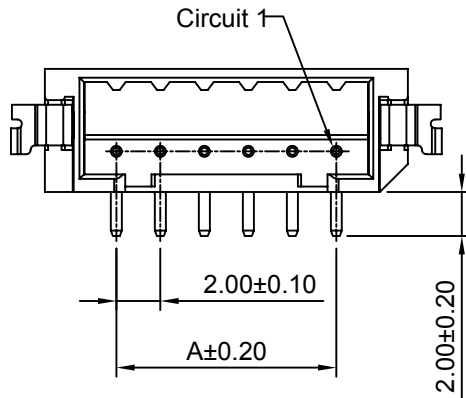

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 650V AC/minute

Pin Material: Brass/Tin over Nickel

Solder Tabs: Brass/Tin over Nickel

Material: Nylon 6T,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	8.50	9P	16.00	22.50
3P	4.00	10.50	10P	18.00	24.50
4P	6.00	12.50	11P	20.00	26.50
5P	8.00	14.50	12P	22.00	28.50
6P	10.00	16.50	13P	24.00	30.50
7P	12.00	18.50	14P	26.00	32.50
8P	14.00	20.50	15P	28.00	34.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw BY:		Approved :
LIZQ		GONGYB

Title :

2.00mm PITCH

180° WAFER - SMT TYPE

DRAW NO : A2011WV-S-XP

REV
A0

			General Tolerance	
A0	NEW RELEASE	2005.05.10	x.x≤0.25	ANGLE±
REV	DESCRIPTION	DATE	x.xx≤0.20	
			x.xxx≤0.15	