




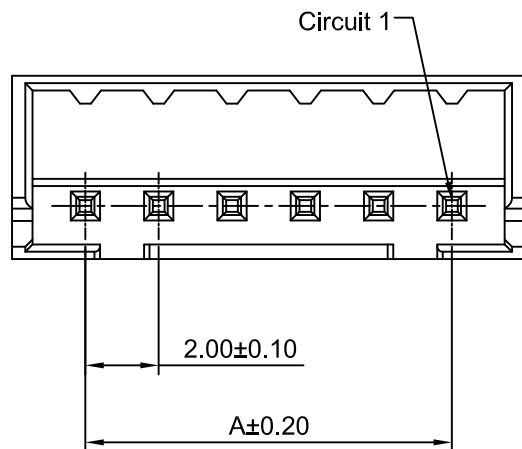

Ordering Information:

A2011WV-XP - $\frac{6T}{2} - \frac{G}{3}$




1.Part NO.
2.Material:
6T: Nylon 6T,UL94V-0
3.Finish:
G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 650V AC/minute
Pin Material: Brass/Gold over Nickel
Material: Nylon 6T,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	9P	16.00	20.00
3P	4.00	8.00	10P	18.00	22.00
4P	6.00	10.00	11P	20.00	24.00
5P	8.00	12.00	12P	22.00	26.00
6P	10.00	14.00	13P	24.00	28.00
7P	12.00	16.00	14P	26.00	30.00
8P	14.00	18.00	15P	28.00	32.00

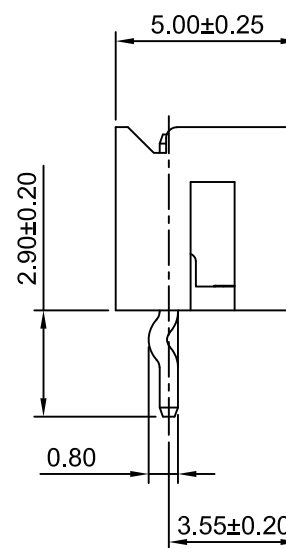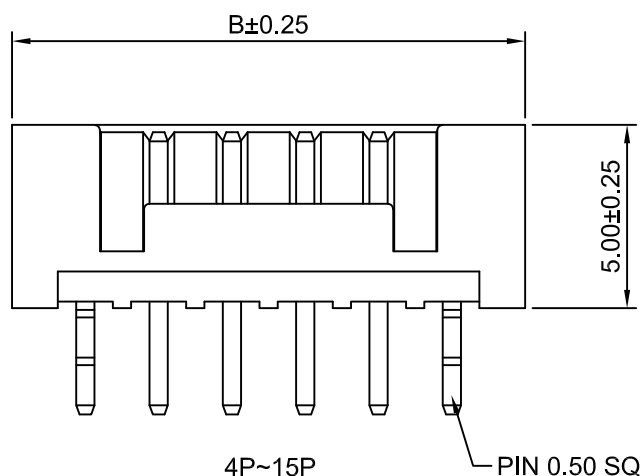

P.C.B LAYOUT
TOLERANCE:±0.05

A2	ADD THE INFORMATION	2020.07.17
A1	CHANGE THE DRAW NO.	2019.10.16
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH 180° WAFER	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO. A2011WV-XP-6T-G	
			REV A2	