

Ordering Information:

A2011WVA-2xXP - **
1 2

1.Part NO.

2.Color:

(Blank): White

BL: Blue

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: PBT,UL94V-0

Ordering Information & Dimensions


Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x4P	6.00	11.40	9.80	2x13P	24.00	29.40	27.80
2x5P	8.00	13.40	11.80	2x14P	26.00	31.40	29.80
2x6P	10.00	15.40	13.80	2x15P	28.00	33.40	31.80
2x7P	12.00	17.40	15.80	2x16P	30.00	35.40	33.80
2x8P	14.00	19.40	17.80	2x17P	32.00	37.40	35.80
2x9P	16.00	21.40	19.80	2x18P	34.00	39.40	37.80
2x10P	18.00	23.40	21.80	2x19P	36.00	41.40	39.80
2x11P	20.00	25.40	23.80	2x20P	38.00	43.40	41.80
2x12P	22.00	27.40	25.80				

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1			
DRAWN	CHK'D	APPR	2.00mm PITCH VERTICAL DUAL ROW WAFER		
Chengbian Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2011WVA-2xXP		REV A1
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°					
A1		CHANGE THE DRAWING			
A0		NEW RELEASE			
REV		DESCRIPTION	DATE		

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

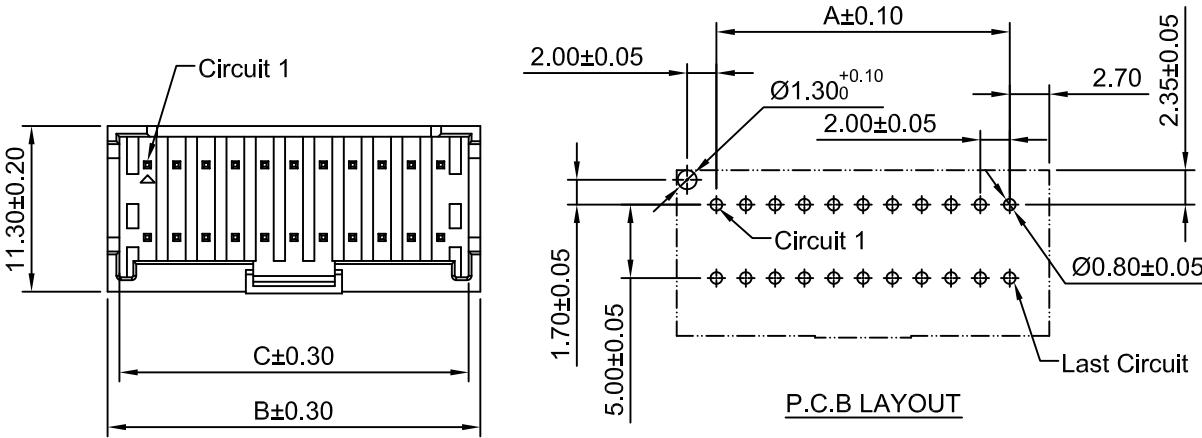

P.C.B LAYOUT

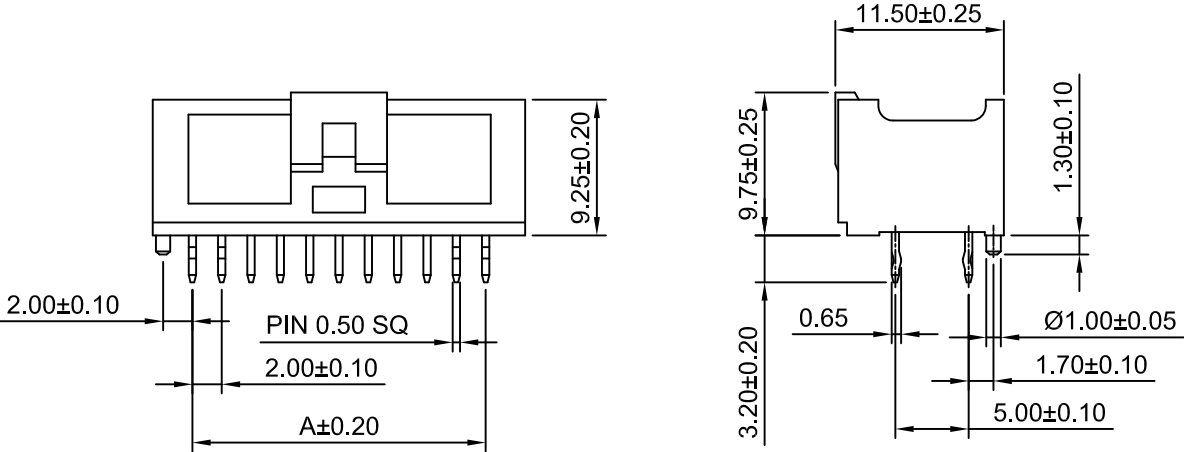

REV
A1