

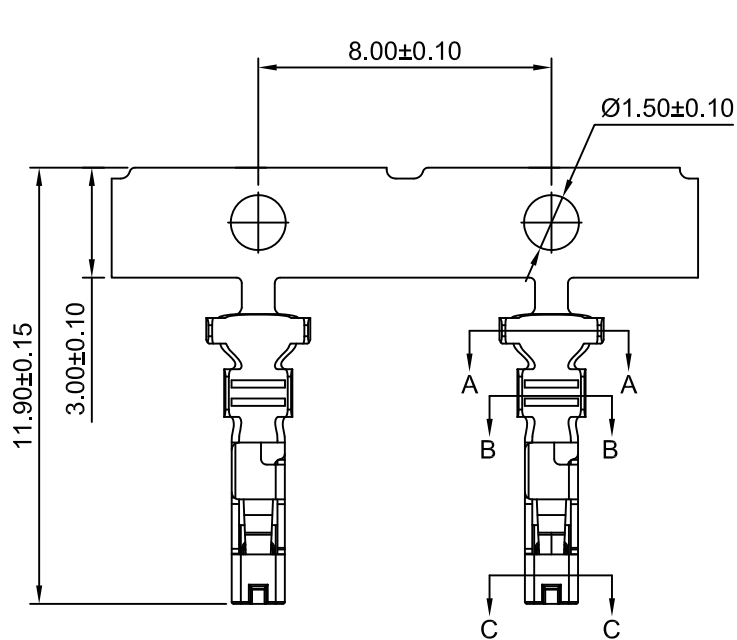




SEC:A-A

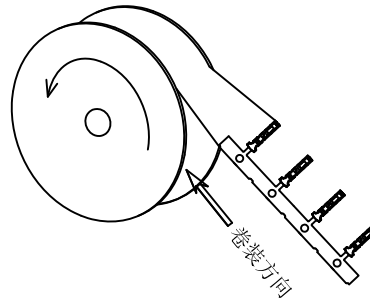

SEC:B-B

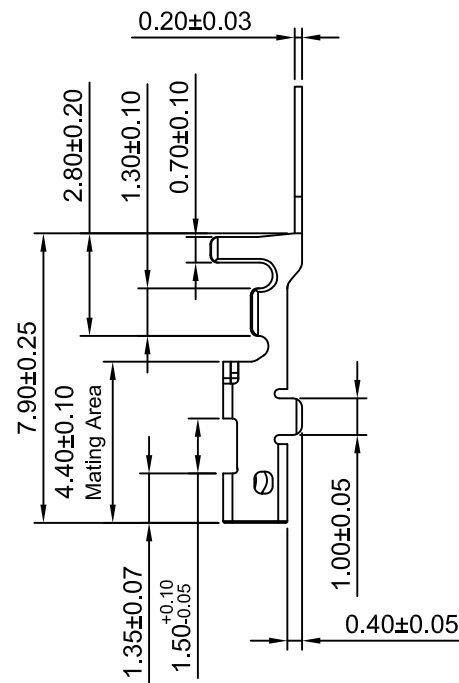

SEC:C-C

Ordering Information:
A2012F-GCA-K-L - ***
1 2

1.Part NO.

2.Finsh:

(Blank): Gold over Nickel(Au:1µin[0.03µm] Min)
G3: Gold over Nickel(Au:3µin[0.08µm] Min,Mating Area)
G10: Gold over Nickel(Au:10µin[0.25µm] Min,Mating Area)
G15: Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)
G30: Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)

Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2012F-TCA-K-L	AWG#28~#30	1.20mm(max)	High conductive copper alloy	Tin over Nickel	8000 PCS
A2012F-GCA-K-L	AWG#28~#30	1.20mm(max)	High conductive copper alloy	Gold over Nickel	8000 PCS

A1	CHANGE THE DRAWING	2023.11.29
A0	NEW RELEASE	2023.07.10
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			TITLE	
Unit mm	Scale 5:1	Sheet 1 of 1	2.00mm PITCH CRIMP TERMINAL	
DRAWN Haisen Li	CHK'D Diankui Wan	APPR Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°			DRAWING NO. A2012F-T-K-L	
			REV A1	