

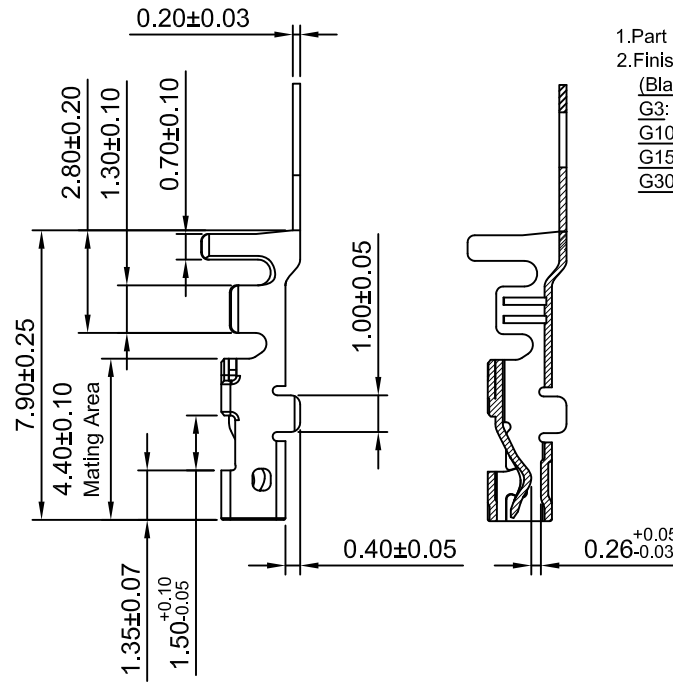
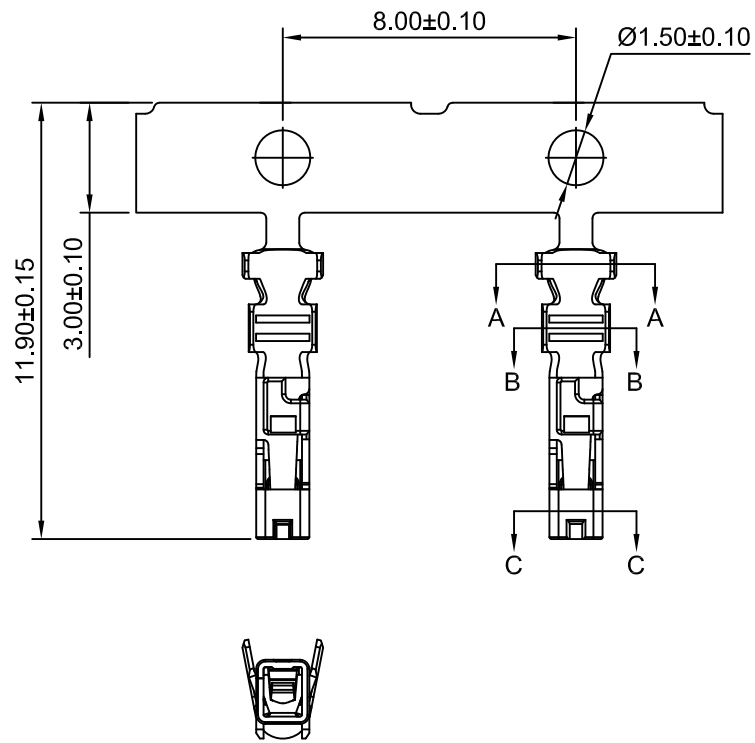


SEC:A-A



SEC:B-B



SEC:C-C

Ordering Information:

A2012F-GCA-K - ***

1 2

1.Part NO.

2.Finish:

(Blank): Gold over Nickel(Au:1µin[0.03µm] Min)

G3: Gold over Nickel(Au:3µin[0.08µm] Min,Mating Area)

G10: Gold over Nickel(Au:10µin[0.25µm] Min,Mating Area)

G15: Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)

G30: Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)

Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2012F-TCA-K	AWG#22~#28	1.60mm(max)	High conductive copper alloy	Tin over Nickel	8000 PCS
A2012F-GCA-K	AWG#22~#28	1.60mm(max)	High conductive copper alloy	Gold over Nickel	8000 PCS

A1	CHANGE THE DRAWING	2023.11.29
A0	NEW RELEASE	2023.07.10
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 2.00mm PITCH CRIMP TERMINAL	
mm	5:1	1 of 1		
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x.xx±0.25			REV A1	
x.xx±0.20				
x.xxx±0.15				
ANGLES ±1°		A2012F-T-K		