









2P




5P



3P~4P



6P~15P

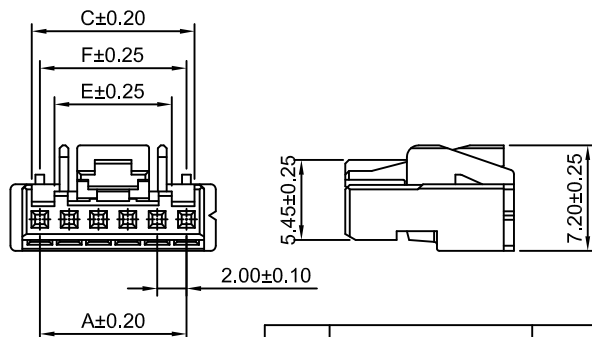

Ordering Information:

A2012HA-XP - **

1 2

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)					
	A	B	C	D	E	F
2P	2.00	4.40	3.00	2.10	---	---
3P	4.00	6.40	5.00	3.90	---	---
4P	6.00	8.40	6.60	4.90	---	---
5P	8.00	10.40	9.00	4.90	8.00	---
6P	10.00	12.40	11.10	4.90	8.00	10.00
7P	12.00	14.40	13.10	4.90	8.00	10.00
8P	14.00	16.40	15.10	4.90	8.00	10.00
9P	16.00	18.40	17.10	4.90	8.00	12.00
10P	18.00	20.40	19.10	11.40	14.60	17.40
11P	20.00	22.40	21.10	11.40	14.60	17.40
12P	22.00	24.40	23.10	11.40	14.60	17.40
13P	24.00	26.40	25.10	11.40	14.60	17.40
14P	26.00	28.40	27.10	11.40	14.60	17.40
15P	28.00	30.40	29.10	11.40	14.60	17.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

			Title : 2.00mm Pitch		
Unit	Scale	Sheet			
mm	2:1	1 of 1			
Draw By:		Approved :			
Dlankul Wan		Jack Yin			
General Tolerance			Housing		
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT			
				DRAW NO : A2012HA-XP	REV A0

PROJECT

