

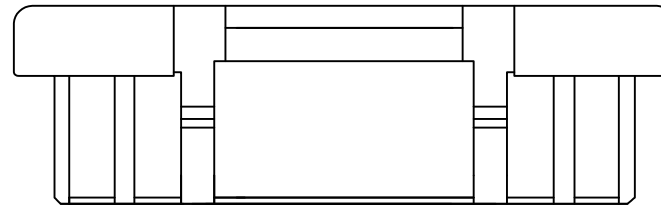
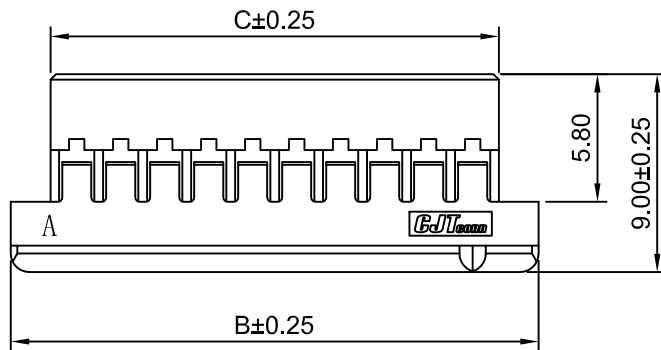


9P~12P



13P~15P





2P

SPECIFICATIONS:


Current Rating: 3A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66 UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			Part NO.	Dimensions(mm)		
	A	B	C		A	B	C
A2012HE-2P	2.00	8.00	4.40	A2012HE-9P	16.00	22.00	18.40
A2012HE-3P	4.00	10.00	6.40	A2012HE-10P	18.00	24.00	20.40
A2012HE-4P	6.00	12.00	8.40	A2012HE-11P	20.00	26.00	22.40
A2012HE-5P	8.00	14.00	10.40	A2012HE-12P	22.00	28.00	24.40
A2012HE-6P	10.00	16.00	12.40	A2012HE-13P	24.00	30.00	26.40
A2012HE-7P	12.00	18.00	14.40	A2012HE-14P	26.00	32.00	28.40
A2012HE-8P	14.00	20.00	16.40	A2012HE-15P	28.00	34.00	30.40

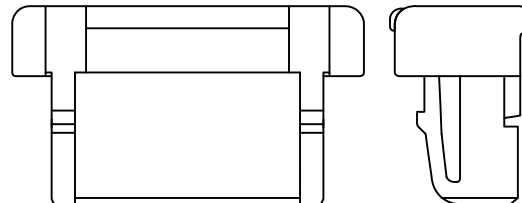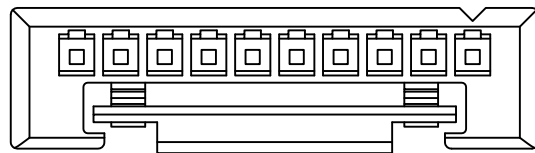

2P~8P

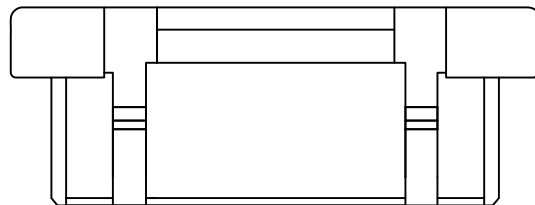

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHKD	APPR	2.00mm PITCH HOUSING	
Wenmin Luo	DianKui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.x±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2012HE-XP	A0

A0	NEW RELEASE	2021.11.02
REV	DESCRIPTION	DATE