




3P~5P








2P

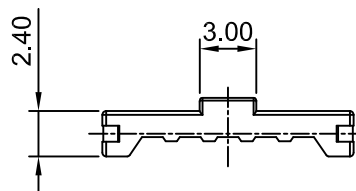

7P~9P, 11P~15P

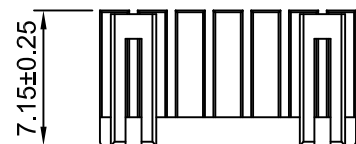

3P~5P

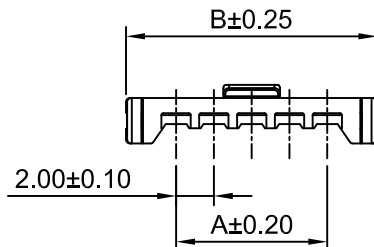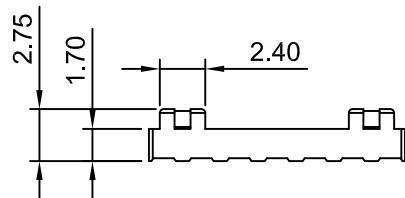

Ordering Information:

A2012SA-XP - **
1 2

1.Part NO.

2.Material:

(Blank): PBT, UL94V-0(Natural) (2P~5P)

4T: Nylon 4T, UL94V-0(Natural) (6P~15P)

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2012SA-2P	2.00	7.30	---
A2012SA-3P	4.00	9.30	---
A2012SA-4P	6.00	11.30	---
A2012SA-5P	8.00	13.30	---
A2012SA-6P	10.00	11.55	10.00
A2012SA-7P	12.00	13.55	10.00
A2012SA-8P	14.00	15.55	10.00
A2012SA-9P	16.00	17.55	12.00
A2012SA-10P	18.00	19.55	17.40
A2012SA-11P	20.00	21.55	17.40
A2012SA-12P	22.00	23.55	17.40
A2012SA-13P	24.00	25.55	17.40
A2012SA-14P	26.00	27.55	17.40
A2012SA-15P	28.00	29.55	17.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.00mm PITCH HOUSING	
mm	2.5:1	1 of 1		
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2012SA-XP	REV A2
x, x±0.25				
x, xxx±0.20				
x, xxx±0.15				
ANGLES ±1°				

A2	CHANGE THE DRAWING	2021.03.16
A1	CHANGE SIZE B	2020.03.27
A0	NEW RELEASE	2019.10.07
REV	DESCRIPTION	DATE