


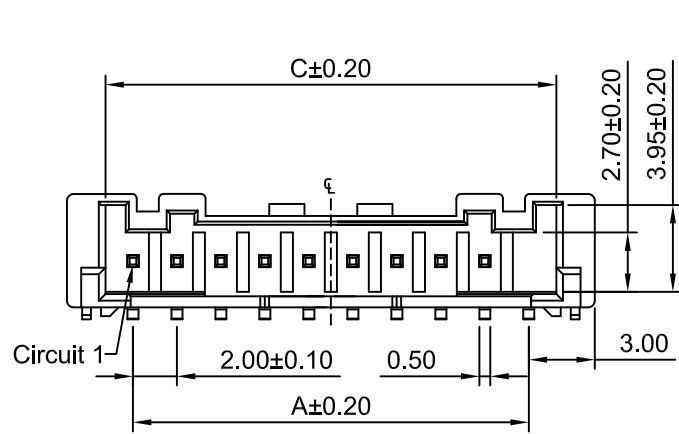


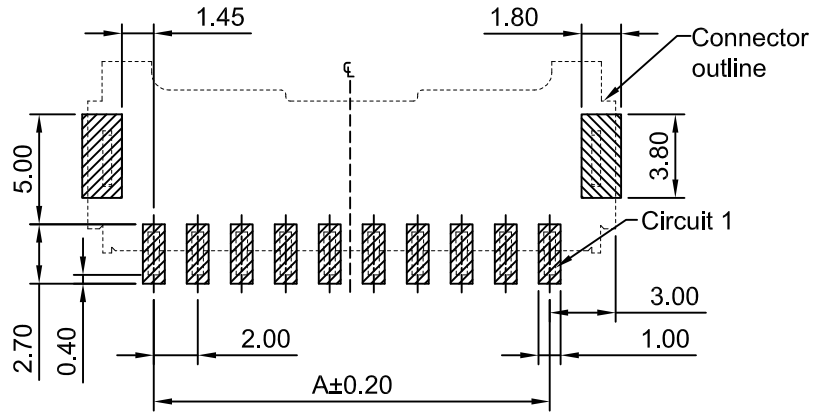

10~15P

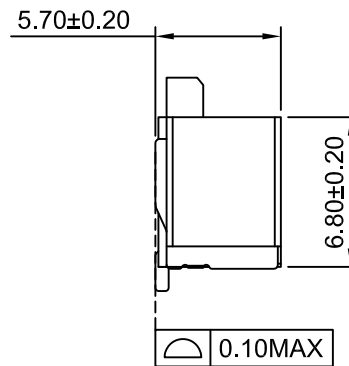

P.C.B LAYOUT
TOLERANCE:±0.05

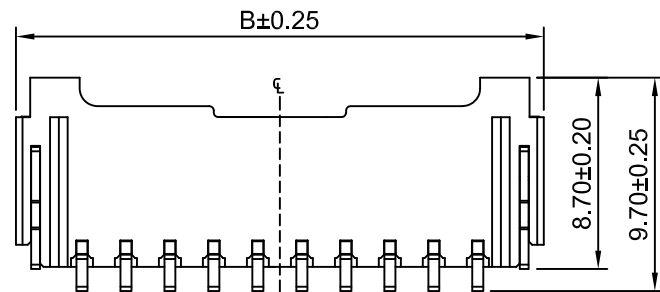


SPECIFICATIONS:


Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material:Brass/Tin over Nickel
Material:Nylon 6T,UL94V-0(Ivory)

Ordering Information & Dimensions


Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	8.00	4.50	9P	16.00	22.00	18.50
3P	4.00	10.00	6.50	10P	18.00	24.00	20.50
4P	6.00	12.00	8.50	11P	20.00	26.00	22.50
5P	8.00	14.00	10.50	12P	22.00	28.00	24.50
6P	10.00	16.00	12.50	13P	24.00	30.00	26.50
7P	12.00	18.00	14.50	14P	26.00	32.00	28.50
8P	14.00	20.00	16.50	15P	28.00	34.00	30.50




5P

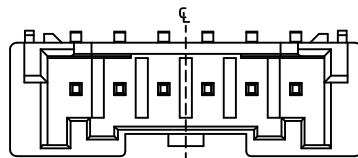


6~9P



2P



3P



4P

Ordering Information:

A2012WR-S-XP - ***

1 2

1.Part NO.

2.Material:

(Blank):Nylon 6T,UL94V-0

GWT:Nylon 6T,UL94V-0,GWT 750 °C

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRAWN	CHK'D	APPR	2.00mm Pitch Right angle Wafer - SMT Type	
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A4
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
			A2012WR-S-XP	