

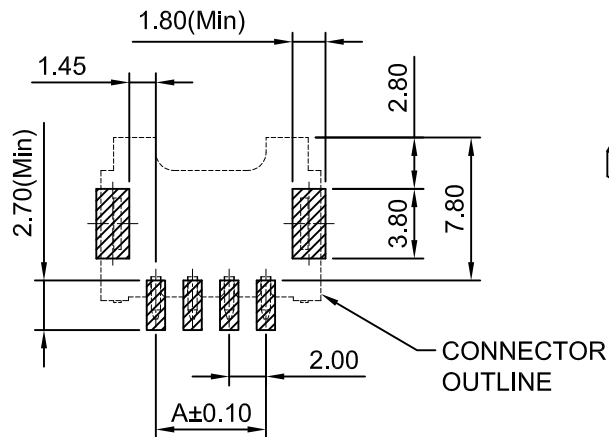
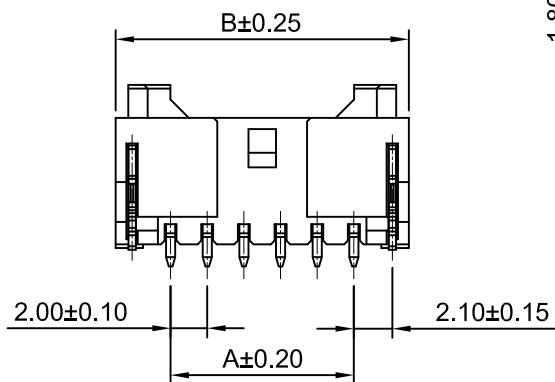
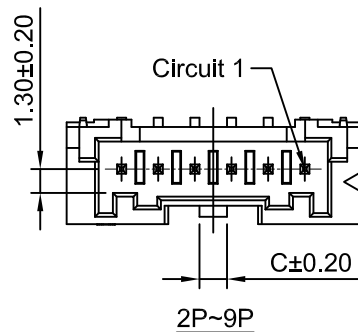
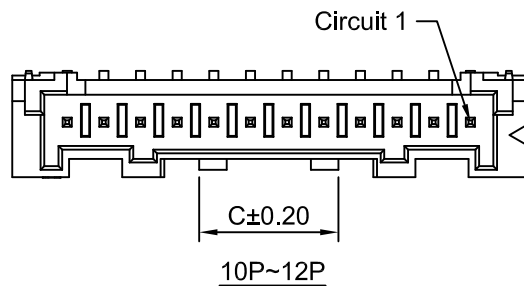


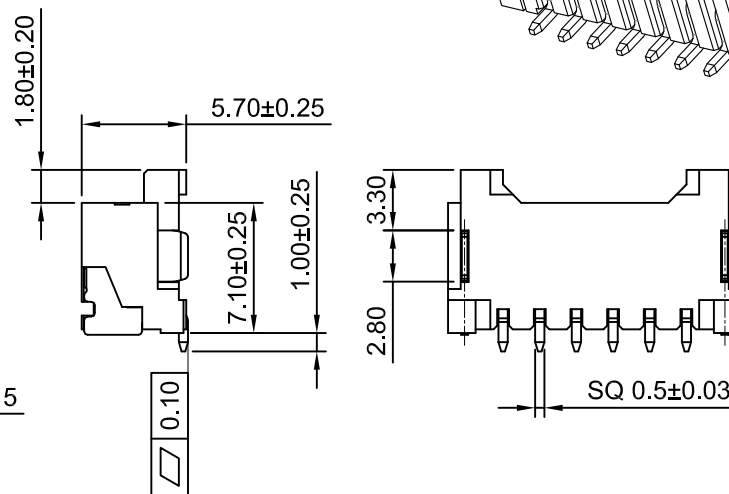

P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

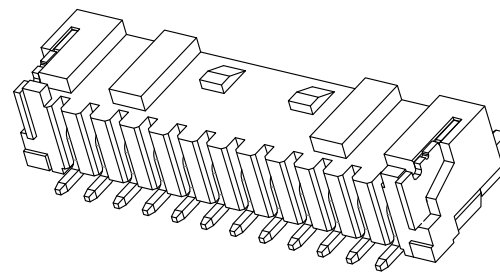

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
PIN Material: Brass/Tin over Nickel
Material: Nylon 6T UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2012WRB-S-2P	2.00	8.00	0.78
A2012WRB-S-3P	4.00	10.00	1.20
A2012WRB-S-4P	6.00	12.00	1.50
A2012WRB-S-5P	8.00	14.00	1.50
A2012WRB-S-6P	10.00	16.00	1.50
A2012WRB-S-7P	12.00	18.00	1.50
A2012WRB-S-8P	14.00	20.00	1.50
A2012WRB-S-9P	16.00	22.00	1.50
A2012WRB-S-10P	18.00	24.00	7.60
A2012WRB-S-11P	20.00	26.00	7.60
A2012WRB-S-12P	22.00	28.00	7.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH RIGHT ANGLE Wafer -SMD TYPE	
Wenmin Luo	DianKui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			A2012WRB-S-XP	A0

A0	NEW RELEASE	2020.07.01
REV	DESCRIPTION	DATE