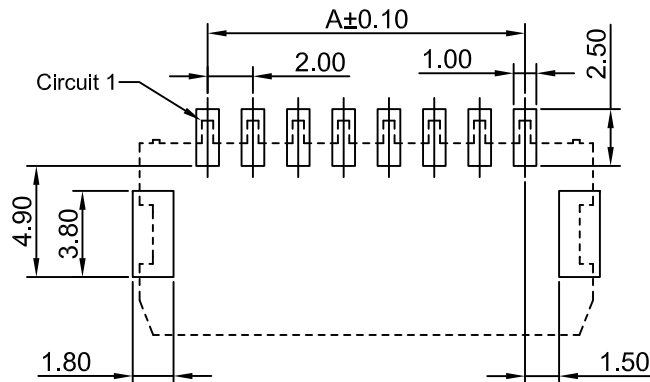
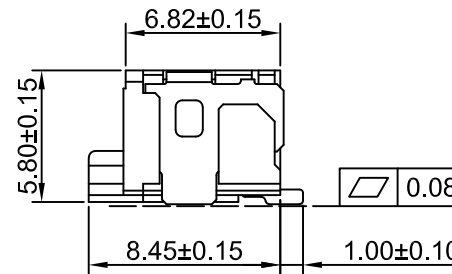
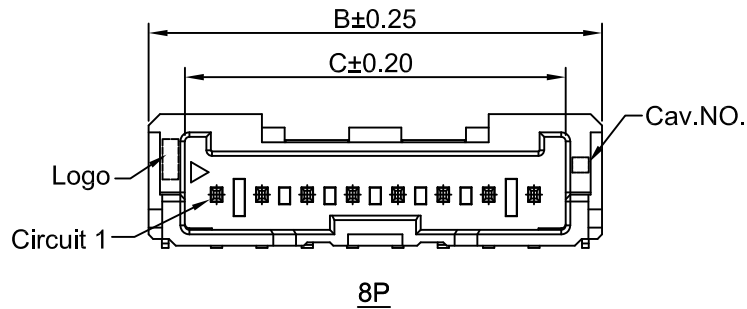

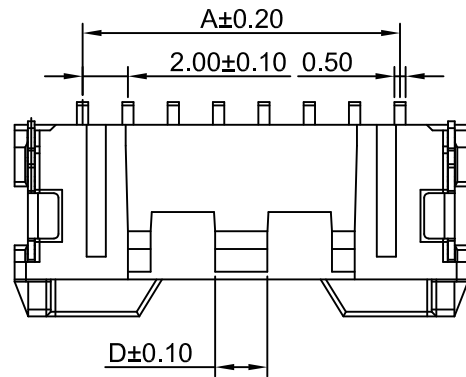


Ordering Information:

A2012WRJ-S-XP - *** - *** - *** - ***
1 2 3 4 5

1.Part NO.

2.Material:

(Blank): Nylon 9T,UL94V-0

3.Color:

(Blank): Black

IV: Ivory

4.Finish:

(Blank): Matte Tin over Nickel

G: Gold over Nickel(Au:1µin[0.03µm] Min,Mating Area)

G3: Gold over Nickel(Au:3µin[0.08µm] Min,Mating Area)

G10: Gold over Nickel(Au:10µin[0.25µm] Min,Mating Area)

G15: Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)

G30: Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)

5.Packing:

(Blank): Tape & Reel

SPECIFICATIONS:

Current Rating: 3.4A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass

Solder tabs: Brass/Matte Tin over Nickel

Ordering Information & Dimensions















Part NO.	Dimensions(mm)			
	A	B	C	D
A2012WRJ-S-2P	2.00	8.00	4.80	1.00
A2012WRJ-S-3P	4.00	10.00	6.80	
A2012WRJ-S-4P	6.00	12.00	8.80	1.80
A2012WRJ-S-5P	8.00	14.00	10.80	
A2012WRJ-S-6P	10.00	16.00	12.80	2.30
A2012WRJ-S-7P	12.00	18.00	14.80	
A2012WRJ-S-8P	14.00	20.00	16.80	
A2012WRJ-S-9P	16.00	22.00	18.80	
A2012WRJ-S-10P	18.00	24.00	20.80	
A2012WRJ-S-11P	20.00	26.00	22.80	5.00
A2012WRJ-S-12P	22.00	28.00	24.80	
A2012WRJ-S-13P	24.00	30.00	26.80	
A2012WRJ-S-14P	26.00	32.00	28.80	
A2012WRJ-S-15P	28.00	34.00	30.80	
A2012WRJ-S-16P	30.00	36.00	32.80	

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.



Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 2	2.00mm PITCH RIGHT-ANGLE SINGLE ROW WAFER -SMT TYPE	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2012WRJ-S-XP	
A0	NEW RELEASE		REV A0	
REV	DESCRIPTION	DATE		

A0	NEW RELEASE	2024.12.03
REV	DESCRIPTION	DATE

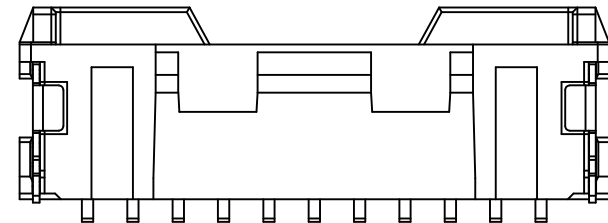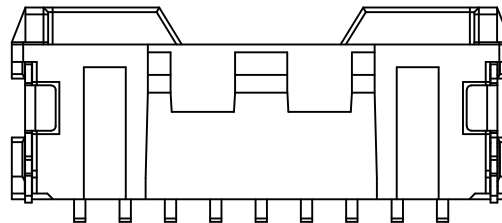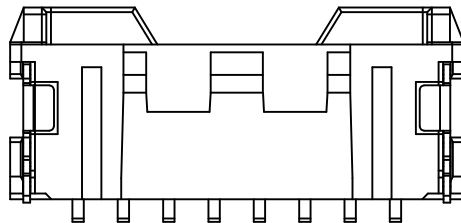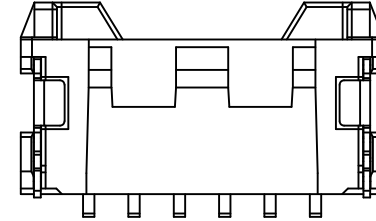








A0	NEW RELEASE	2024.12.0
REV	DESCRIPTION	DATE

			CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet	TITLE 2.00mm PITCH RIGHT-ANGLE SINGLE ROW WAFER -SMT TYPE		
mm	3:1	2 of 2			
DRAWN	CHK'D	APPR'D			
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°					
			REV A0		

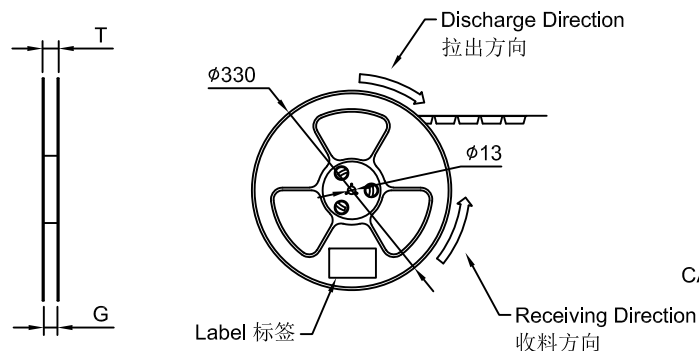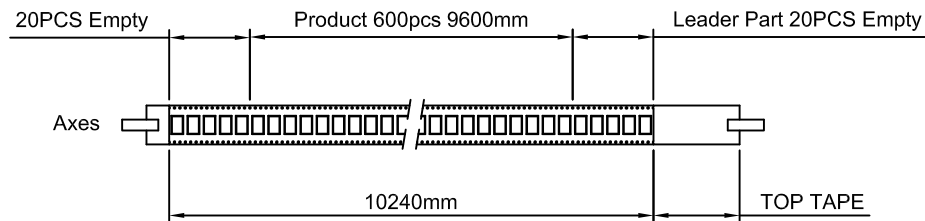

Single hole:None Hole Side
单孔: 贴无链孔侧
Double hole:Elliptical Hole Side
双孔: 贴椭圆孔侧

COVER TAPE PEEL STRENGTH:20~120g
PEEL SPEED:300mm/minute

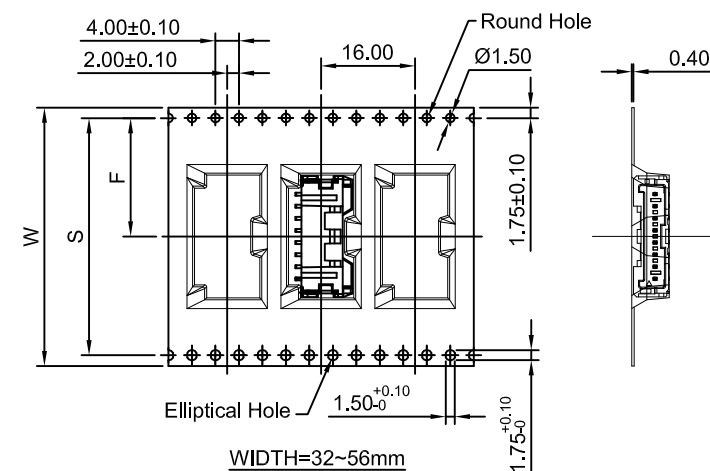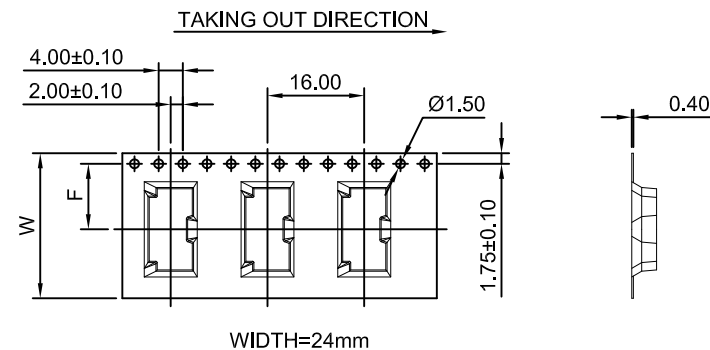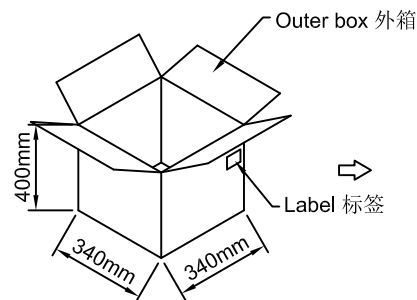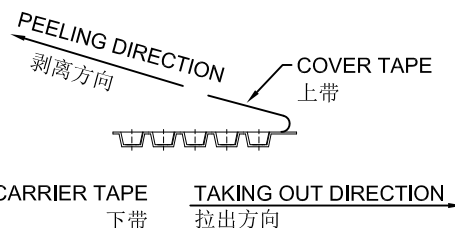

Circuits	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
2P~4P	24.00	/	11.50	28.50	24.50	600	13	7800
5P~7P	32.00	28.40	14.20	36.50	32.50	600	10	6000
8P~13P	44.00	40.40	20.20	48.50	44.50	600	7	4200
14P~16P	56.00	52.40	26.20	60.50	56.50	600	6	3600

NOTES:

- Carrier Camber Is Within 1mm In 100mm;带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.20mm;圆孔十个孔距距离累计允许公差为±0.20mm

A0	NEW RELEASE	2024.12.14
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet	TITLE		
mm	1:1.25	1 of 1	2.00mm PITCH RIGHT-ANGLE SINGLE ROW WAFER -SMT TYPE - PACKING		
DRAWN	CHK'D	APPR	DRAWING NO.		
Haisen Li	Diankui Wan	Jack Yin	A2012WRJ-S-XP		
General Tolerances		THIRD ANGLE PROJECTION	REV A0		
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					