




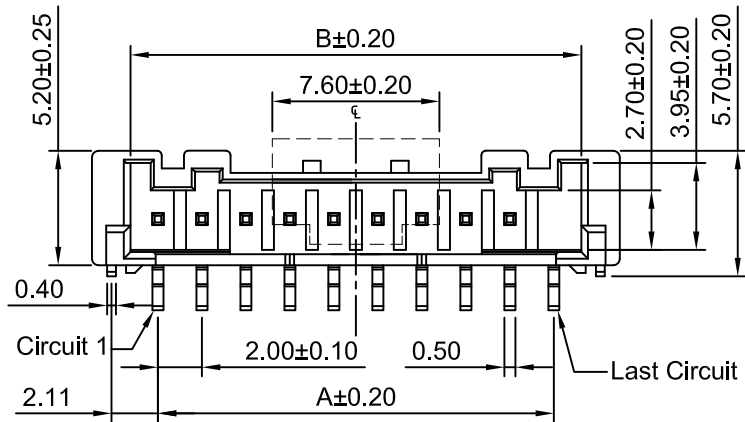


10~15P

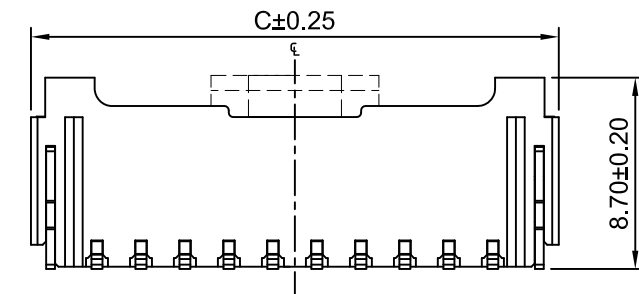


5P

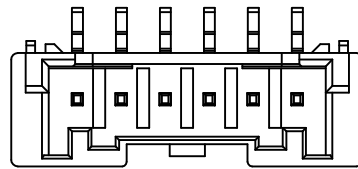


6~9P




2P




3P



4P

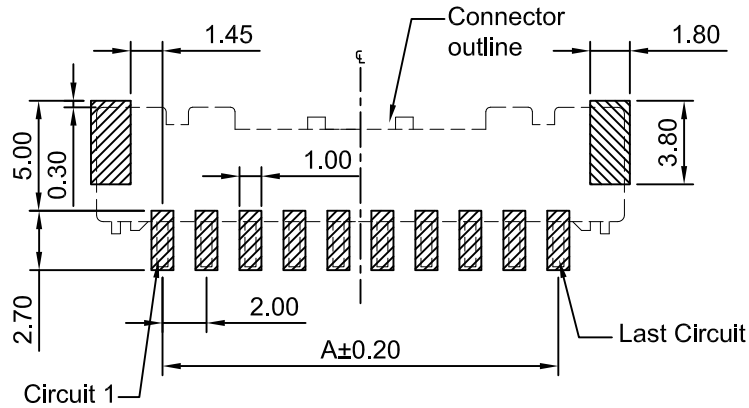

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

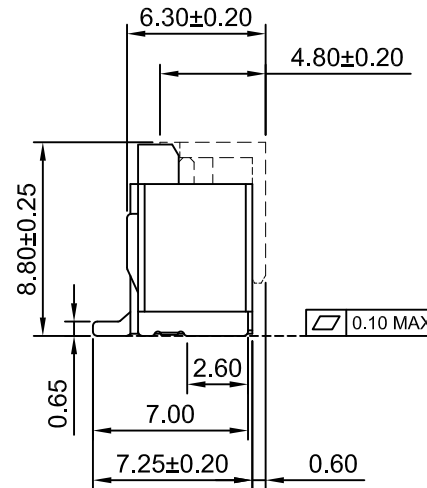

Ordering Information:

A2012WV-S-XP - **
1 2

1.Part NO.

2.Material:

(Blank): Nylon 6T,UL94V-0(Ivory)
LCP: LCP,UL94V-0(Ivory)

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material:Brass/Tin over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	4.50	8.00	9P	16.00	18.50	22.00
3P	4.00	6.50	10.00	10P	18.00	20.50	24.00
4P	6.00	8.50	12.00	11P	20.00	22.50	26.00
5P	8.00	10.50	14.00	12P	22.00	24.50	28.00
6P	10.00	12.50	16.00	13P	24.00	26.50	30.00
7P	12.00	14.50	18.00	14P	26.00	28.50	32.00
8P	14.00	16.50	20.00	15P	28.00	30.50	34.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRAWN	CHKD	APPR	2.00mm PITCH VERTICAL HEADER - SMD TYPE	
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO. A2012WV-S-XP
A7	CHANG THE DRAWING	2023.04.10	x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°	
A6	CHANG THE DRAWING	2023.02.25		REV A7
A5	CHANG THE DRAWING	2022.03.21		
A4	CHANG THE DRAWING	2021.11.01		