



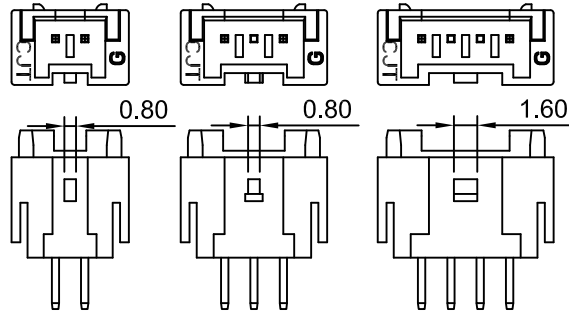

2P


3P

4P

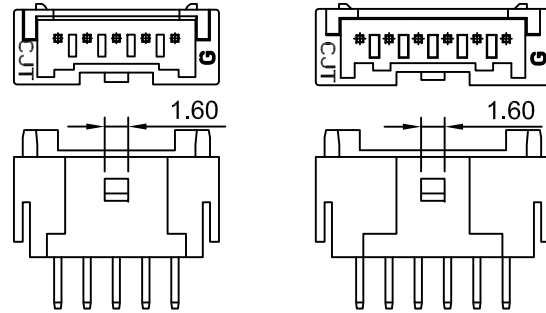



5P

6P

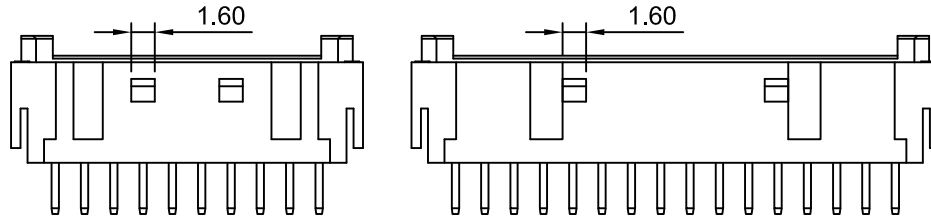

10P~15P

16P

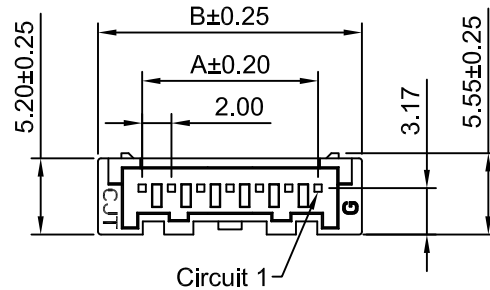

7P~9P

Ordering Information:

A2012WV-XP - LCP - *** - *
1 2 3 4

1.Part NO.

2.Material:

(Blank): LCP,UL94V-0,IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): Ivory

BK: Black

TR: Tomato

DH: Dark gray

LY: Lemon yellow

DO: Dark orange

OR: Orange

GN: Green

BR: Brown

VYL: Vivid yellow

BL: Blue

MG: Moss green

DPK: Dark pink

LE: Light blue

DP: Dark purple

RD: Red

YL: Yellow


VI: Purple

PK: Pink

4.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.



Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material:Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2012WV-2P-LCP	2.00	8.00
A2012WV-3P-LCP	4.00	10.00
A2012WV-4P-LCP	6.00	12.00
A2012WV-5P-LCP	8.00	14.00
A2012WV-6P-LCP	10.00	16.00
A2012WV-7P-LCP	12.00	18.00
A2012WV-8P-LCP	14.00	20.00
A2012WV-9P-LCP	16.00	22.00
A2012WV-10P-LCP	18.00	24.00
A2012WV-11P-LCP	20.00	26.00
A2012WV-12P-LCP	22.00	28.00
A2012WV-13P-LCP	24.00	30.00
A2012WV-14P-LCP	26.00	32.00
A2012WV-15P-LCP	28.00	34.00
A2012WV-16P-LCP	30.00	36.00



CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm Scale: 2:1 Sheet: 1 of 1

DRWN: CHK'D: APPR: Chengbiao Ye Diankui Wan Jack Yin

General Tolerances: x.xx±0.25, x.xxx±0.20, x.xxxx±0.15, ANGLES ±1°



TITLE: 2.00mm PITCH VERTICAL HEADER

DRAWING NO. A2012WV-XP-LCP

REV A4

A4	CHANGE THE DRAWING	2022.11.19
A3	CHANGE THE DRAWING	2022.06.13
A2	MODIFY DRAWING	2021.09.22
A1	CHANGE THE MATERIAL	2021.01.15
A0	NEW RELEASE	2013.04.17
REV	DESCRIPTION	DATE