
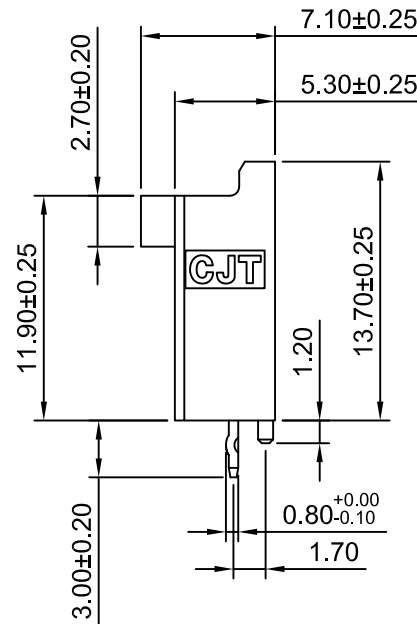


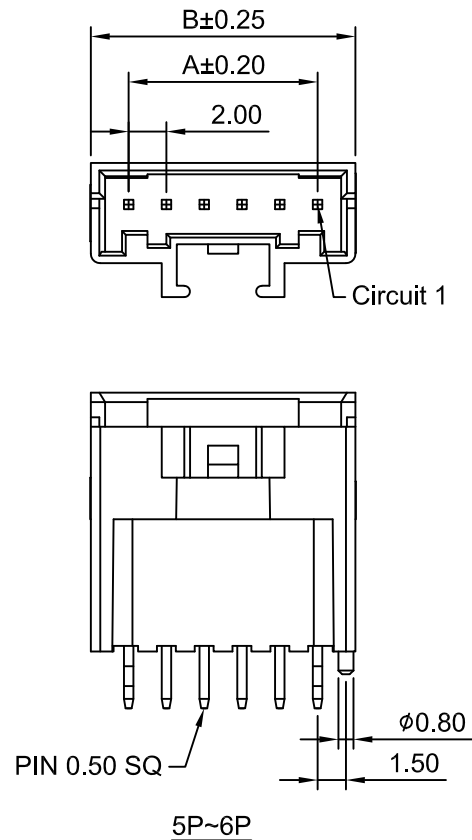

Ordering Information:

A2012WVA-F-XP-H - *** - ** - **
1 2 3 4

1.Part NO.

2.Material:

(Blank):PBT+15%GF,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank):see section 2 material

BK:Black

RD:Red

BL:Blue

GN:Green

OR:Orange

BR:Brown

PK:Pink


YL:Yellow

GY:Gray

4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel

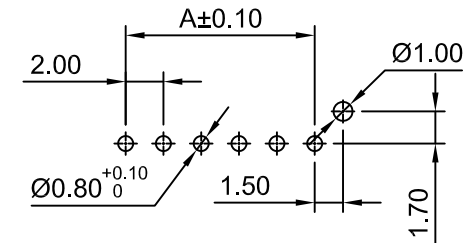

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.


Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	10P	18.00	22.00
3P	4.00	8.00	11P	20.00	24.00
4P	6.00	10.00	12P	22.00	26.00
5P	8.00	12.00	13P	24.00	28.00
6P	10.00	14.00	14P	26.00	30.00
7P	12.00	16.00	15P	28.00	32.00
8P	14.00	18.00	16P	30.00	34.00
9P	16.00	20.00			

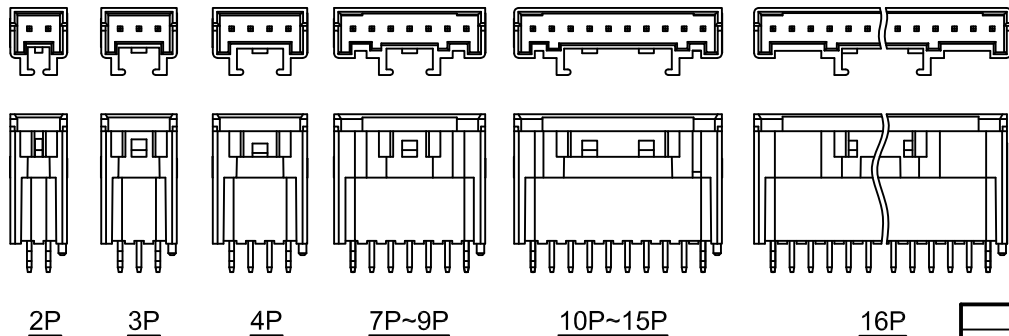

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1	2.00mm Pitch	
DRAWN	CHK'D	APPR	Vertical Wafer	
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A2012WVA-F-XP-H	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A2	

REV	DESCRIPTION	DATE
A2	JL-GC-ECR00610	2025.04.19
A1	NEW RELEASE	2023.01.30
A0	NEW RELEASE	2013.07.01