

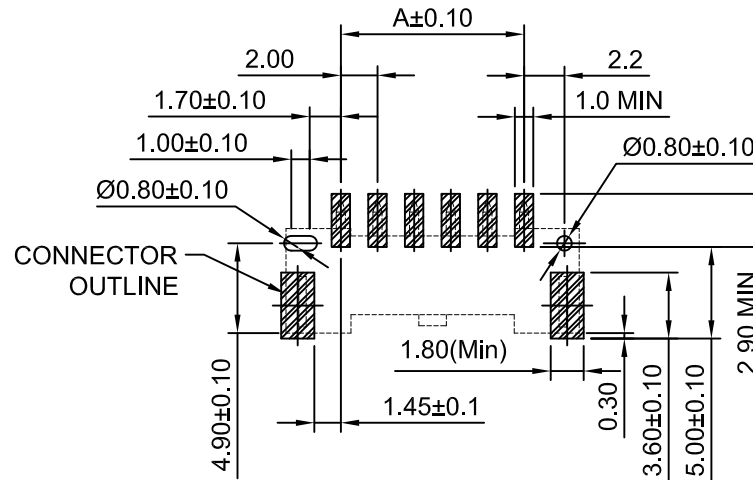
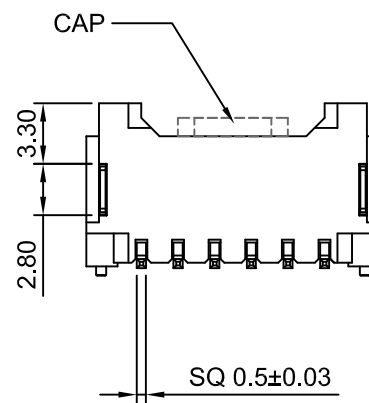
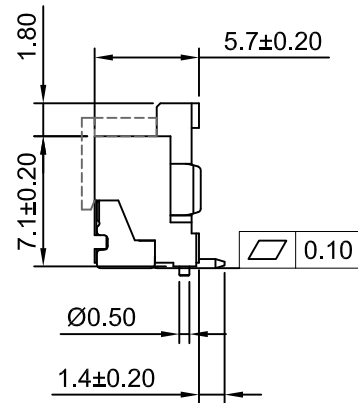
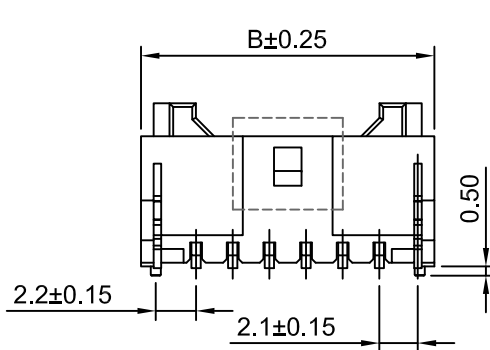
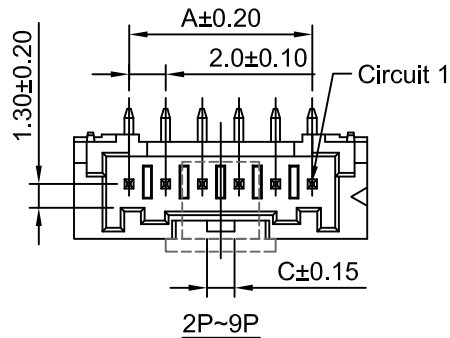


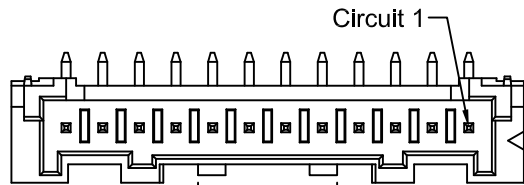

P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05



SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
PIN Material: Brass/Tin over Nickel
Material: Nylon 6T UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2012WVB-S-F-2P	2.00	8.00	0.78
A2012WVB-S-F-3P	4.00	10.00	1.20
A2012WVB-S-F-4P	6.00	12.00	1.50
A2012WVB-S-F-5P	8.00	14.00	1.50
A2012WVB-S-F-6P	10.00	16.00	1.50
A2012WVB-S-F-7P	12.00	18.00	1.50
A2012WVB-S-F-8P	14.00	20.00	1.50
A2012WVB-S-F-9P	16.00	22.00	1.50
A2012WVB-S-F-10P	18.00	24.00	7.60
A2012WVB-S-F-11P	20.00	26.00	7.60
A2012WVB-S-F-12P	22.00	28.00	7.60
A2012WVB-S-F-15P	28.00	34.00	7.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
DRAWN	CHK'D	APPR
Chengbiao Ye	DianKui Wan	Jack Yin

General Tolerances	THIRD ANGLE PROJECTION
x.xx±0.25	
x.xx±0.20	
x.xx±0.15	
ANGLES ±1°	

TITLE		REV A2
2.00mm PITCH VERTICAL WAFER -SMD TYPE		
DRAWING NO. A2012WVB-S-F-XP		

A2	CHANGE THE DRAWING	2022.10.14
A1	CHANGE THE DRAWING	2022.06.27
A0	NEW RELEASE	2020.07.01
REV	DESCRIPTION	DATE