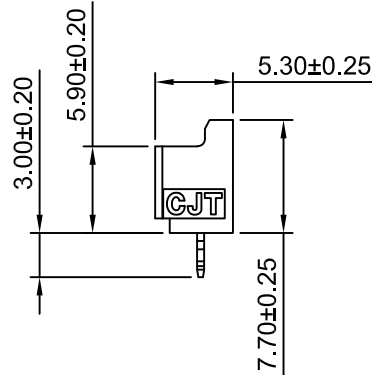
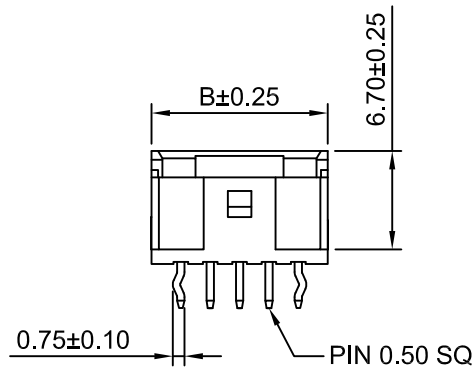
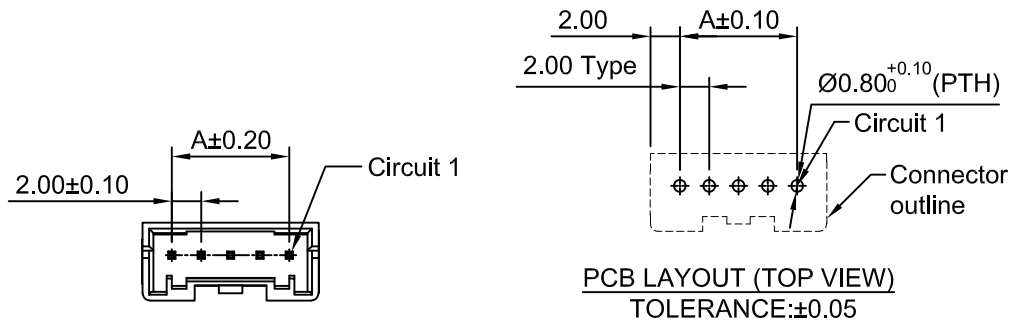


2P

3P

4P

5P

6P

Ordering Information:

A2012WVC-XP - *** - ** - ** - ***
1 2 3 4 5

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Ivory),IEC 60335-1,
5th Edition Glow Wire Capable.

3.Color:

(Blank): see section 2 Material

BK: Black BL: Blue BR: Brown RD: Red

GN: Green GY: Gray PK: Pink OR: Orange

YL: Yellow

4.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel(Au:1µin[0.025µm])

G3: Gold over Nickel(Au:3µin[0.076µm])

G15: Gold over Nickel(Au:1µin[0.381µm],Mating Area)

G30: Gold over Nickel(Au:1µin[0.762µm],Mating Area)

5.Void position:

(Blank): Full positions

N*.**: Void position(select Arbitrary numbers)

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Style	Circuits	X=Void position					
		P1	P2	P3	P4	P5	
N2.3	4P	O	X	X	O		
N3	5P	O	O	X	O	O	
N2.3.4	5P	O	X	X	X	O	

Circuits	Dimensions(mm)	
	A	B
A2012WVC-2P	2.00	6.00
A2012WVC-3P	4.00	8.00
A2012WVC-4P	6.00	10.00
A2012WVC-5P	8.00	12.00
A2012WVC-6P	10.00	14.00

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	2.00mm Pitch Vertical Wafer
DRAWN	CHK'D	APPR'D	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2012WVC-XP
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			
			REV A1