
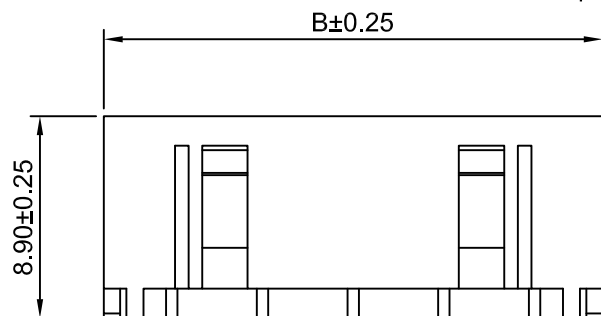
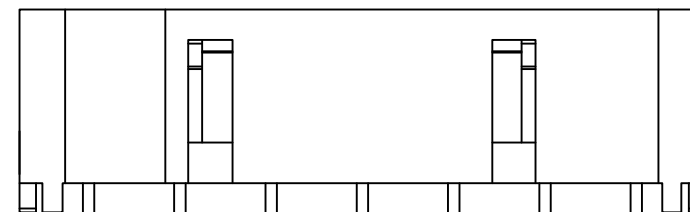

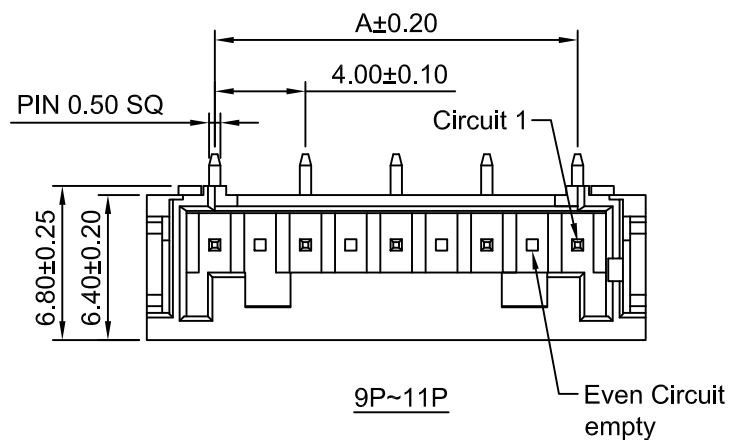


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Matte Tin over Nickel
Material: Nylon 9T UL94V-0(Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions (mm)	
	A	B
A2012WVE-S-3P-A	4.00	10.00
A2012WVE-S-5P-A	8.00	14.00
A2012WVE-S-7P-A	12.00	18.00
A2012WVE-S-9P-A	16.00	22.00
A2012WVE-S-11P-A	20.00	26.00
A2012WVE-S-13P-A	24.00	30.00
A2012WVE-S-15P-A	28.00	34.00

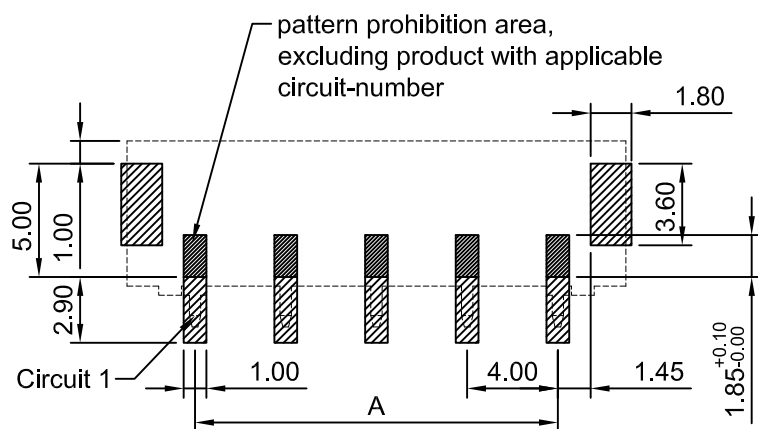

P.C.B LAYOUT
TOLERANCE:±0.10

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2021.11.02

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHK'D	APPR	4.00mm PITCH VERTICAL HEADER -SMD TYPE	
Wenmin Luo	DianKui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A2012WVE-S-XP-A	A0